

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

AF

50

P

LTR

DESCRIPTION

DATE

DWN

APVD

K2

REVISED PER ECO-11-004820

11MAR11

RK

HMR

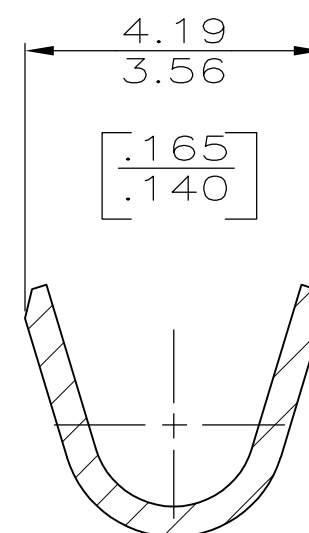
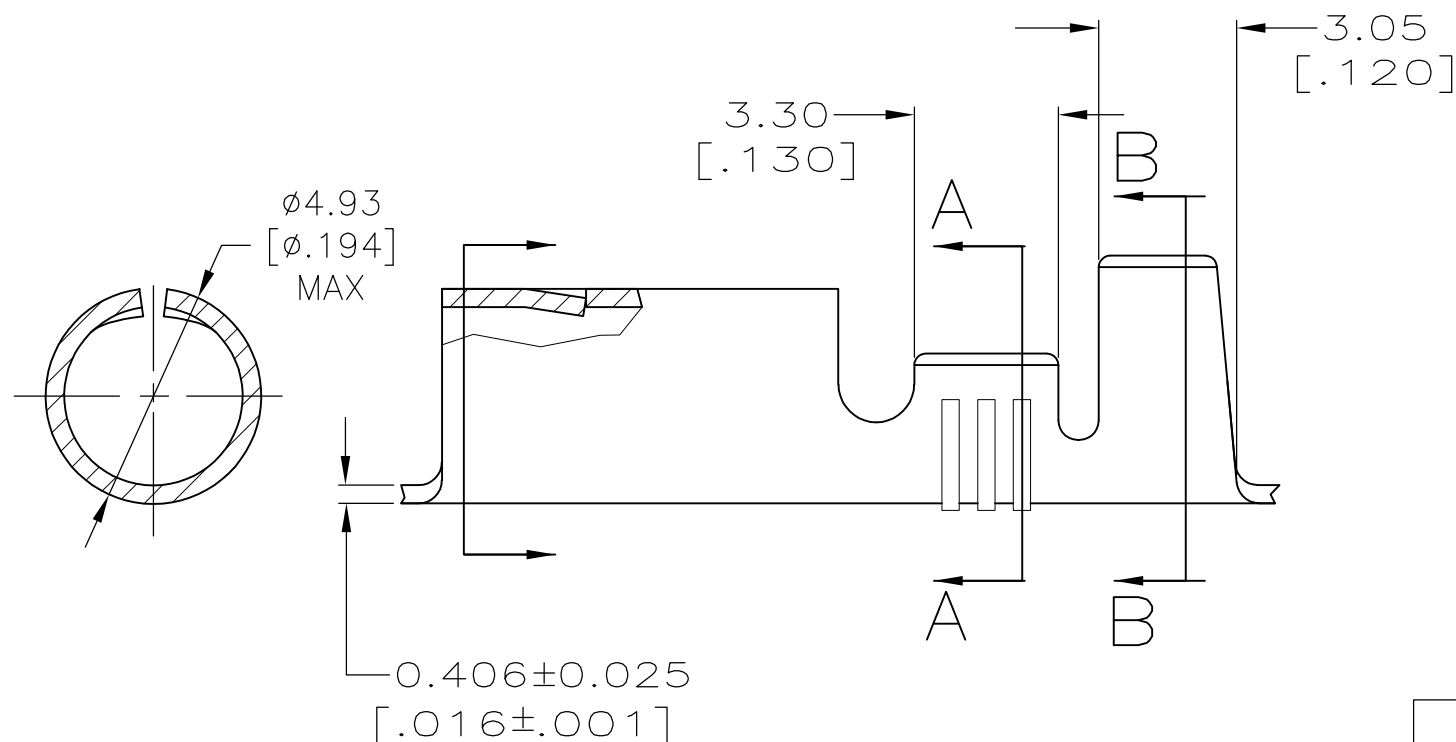
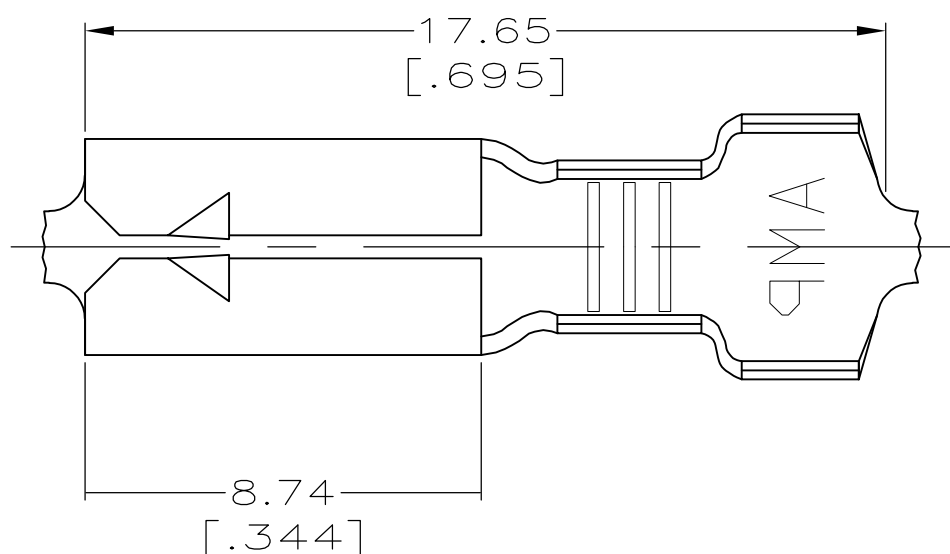
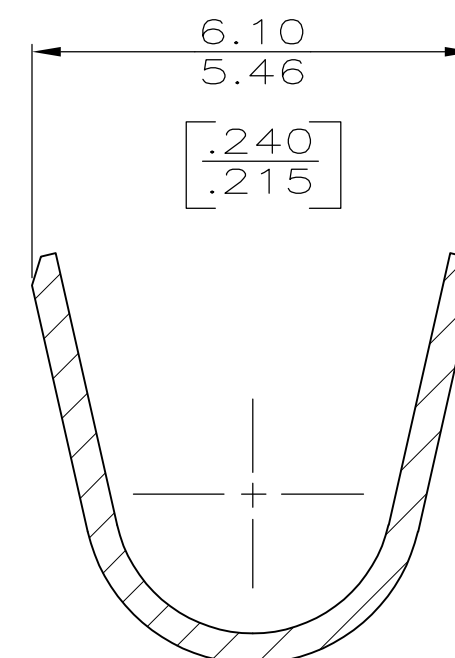
1 CONTINUOUS STRIP ON REEL.

2

0.002032 [.000080] MIN TIN PL PER ASTM-B545.

3

0.00508 [.000200] MIN SILVER PL OVER 0.00254 [.000100] MIN COPPER UNDEPLATE OR 0.00127 [.000050] MIN NICKEL UNDEPLATE.

SECTION A-A
SCALE 10:1SECTION B-B
SCALE 10:1

3	3.30-4.44 DIA	[18-14] AWG	42142-4
-	[.130-.175]		42142-2
2			42142-1
FINISH	INSULATION RANGE	WIRE RANGE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 29/AUG/95
PHILLIP M FORTNEYCHK 29/AUG/95
JEFF R RUTHAPVD 29/AUG/95
GARY YETTER

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT -

CUSTOMER DRAWING

STE


TE Connectivity

NAME
RECEPTACLE, SHUR PLUG,
3.96 [.156] DIA

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A300779 C-42142 -

SCALE 6:1 SHEET 1 OF 1 REV K2

DIMENSIONS:
mm [INCHES]TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± 0.25 [.010]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL

4M BRASS

FINISH

SEE TABLE