
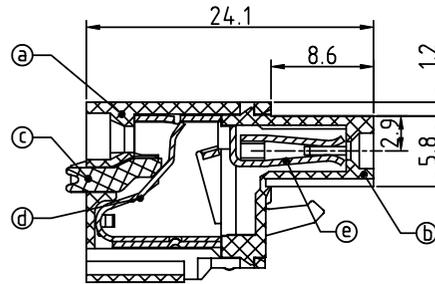
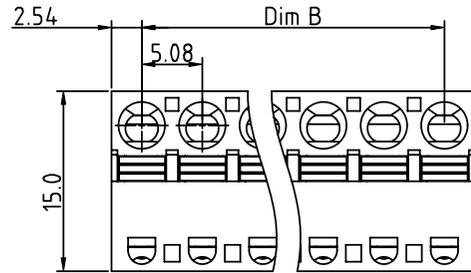
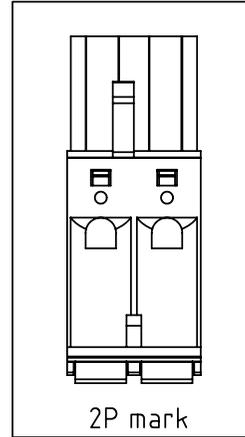


PRODUCT NUMBER	PITCH
HWxx50x000J0G	5.08 mm

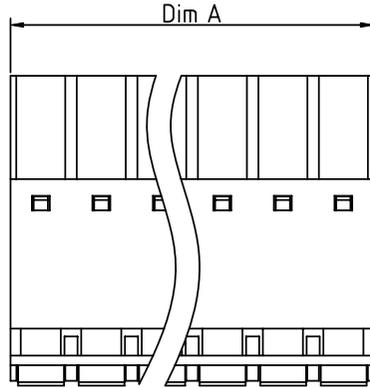

Material:

- Item@Top body:Thermoplastic (UL94V-0)
- ItemⓄBottom body:Thermoplastic (UL94V-0)
- ItemⓄTerminal lever:Thermoplastic (UL94V-0) Orange(RAL2011/P)
- ItemⓄSpring clamp:Stainless Steel
- Item@Female contact:PhBz (CuSn) Tin plated

Electrical cULus

- Voltage rating: 300V
- Current rating: 10A
- Solid wire(AWG):12-26
- Stranded wire(AWG):12-26
- Wire strip length:8-9mm
- Withstanding Voltage:1.6KV
- Operating temperature:-40°C to +115°C
- Safety Approval:

N=Number of poles

Dim A=N×5.08
Dim B=(N-1)×5.08

Poles	Tolerance
2P-6P	±0.15
7P-12P	±0.25
13P-18P	±0.30
19P-24P	±0.40

PART NO.: HW xx 50 x 0 00J0 G

- | | | | |
|--------------|---|-------------------|-----------------|
| Solid block | 0 | Black (RAL9005) | RoHS compliant |
| No. of poles | 2 | Red (RAL3001/D) | (lead<4%) |
| 02 2 poles | 3 | Orange(RAL2011/P) | In copper Alloy |
| 03 3 poles | 4 | Yellow(RAL1018/A) | |
| ... | 5 | Green(RAL6018/T) | |
| 24 24 poles | 6 | Blue (RAL5015/A) | |
| | 8 | Grey(RAL7035/D) | |
| | 9 | White(RAL1102) | |
| | C | Green(RAL6018/U) | |

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	MM	title TERMINAL BLOCK SPRING CLAMP,PLUGGABLE PLUG, CONTACT ON DOWN SIDE
		angles	X.±0.5	scale	dwg no HWxx50x000J0G
		X*±1*	X.XX±0.3		
			X.XX±0.1		sheet 1 of 1 size A4
		dr	EVIN ZHONG 051514		
		enr	EVIN ZHONG 051514	type CUSTOMER Drawing	
		chr	HANKE FENG 051514		
		appd	SHI JUN 051514		
sheet index	revision sheet	A	1		