
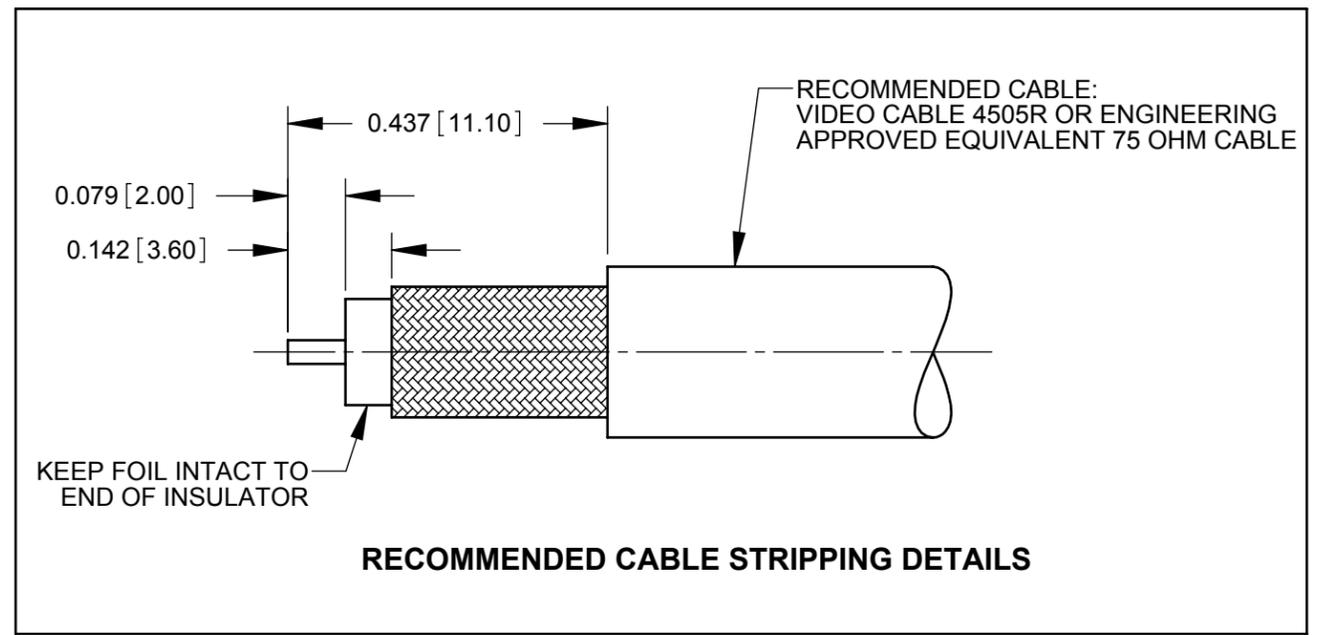


DIMENSIONS SHOWN FOR REFERENCE ONLY

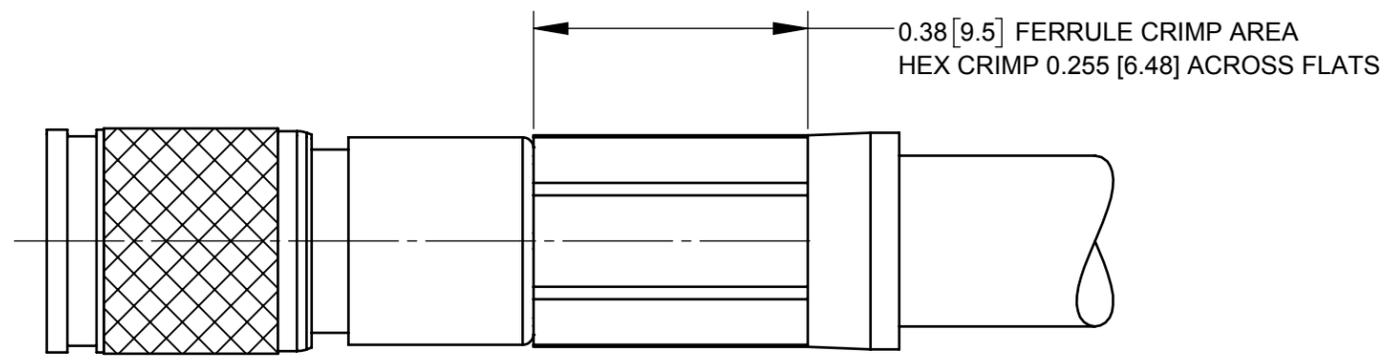

NOTES:

1. MEETS SMPTE 2082-1
CHARACTERISTIC IMPEDANCE: 75 OHMS
CONTACT RESISTANCE: 50 MILLIOHMS MAX.
2. MATERIAL:
BODY: COPPER ALLOY, NICKEL PLATED.
CONTACT PIN: COPPER ALLOY, GOLD PLATED.
SPRING: BERYLLIUM COPPER, NICKEL PLATED.
TINE CONTACT: BERYLLIUM COPPER, GOLD PLATED.
INSULATOR: TEFLON
FERRULE: COPPER ALLOY, NICKEL PLATED.
3. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.					
					SIZE	WIDTH	MULT	LBS/M	TEMPER	
					FINISH			MATERIAL SEE NOTES		
					SPEC No.			SPEC No.		
					FIRST USED ON		SCALE 4:1			
					DATE DRAWN	BY	CHKD	APVD		
					04/05/17	PNK	04/05/17	04/05/17		
							PNK	SRC		
					NAME				PART No.	REV
					UHD DIN 1.0/2.3 PLUG				UHDDIN05	A
					75 OHMS, 4505R, RoHS					
REVISIONS					DO NOT SCALE DRAWING					
A	28195	08/29/19	PC	TJK						
REV	ECO NUMBER	DATE	BY	APVD						