

WATERTITE PLUG
NEMA 5-20P

RUBBER BOX
COLOR: YELLOW


(3.41)

(4.48)

(6.52)

(1.39)


(3.91)

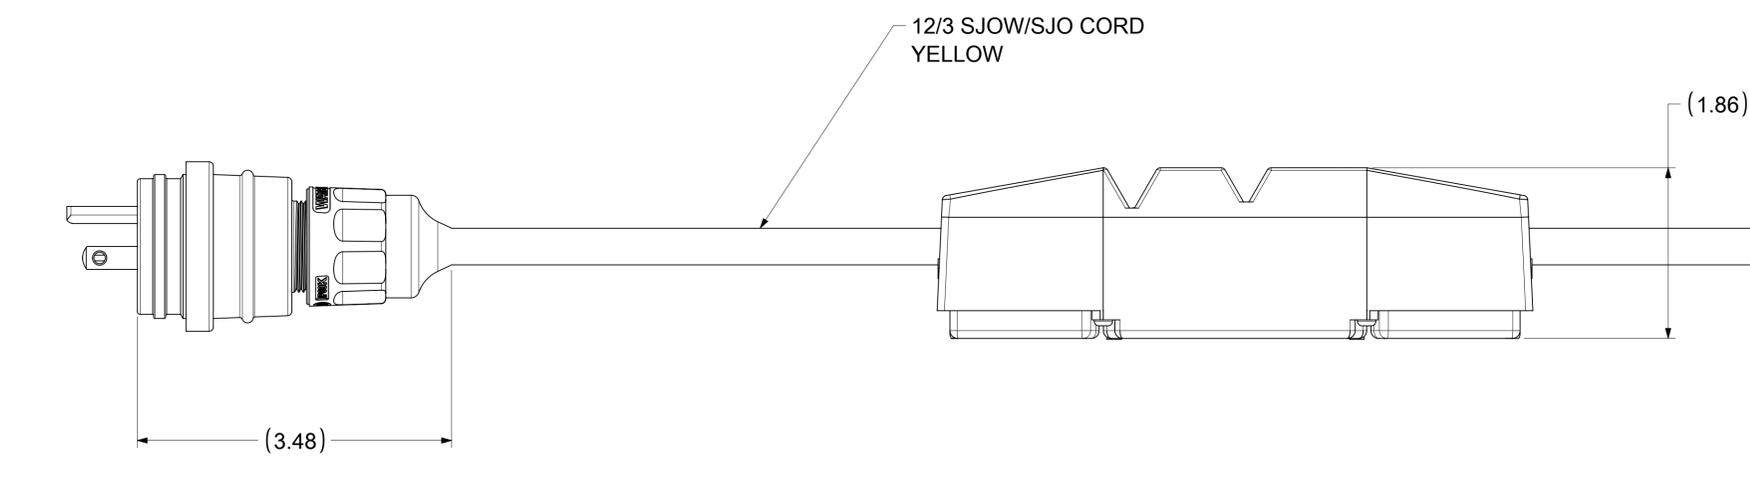

POLYCARBONATE FLIP LIDS
COLOR: YELLOW

12/3 SJOW/SJO CORD
YELLOW

(1.86)

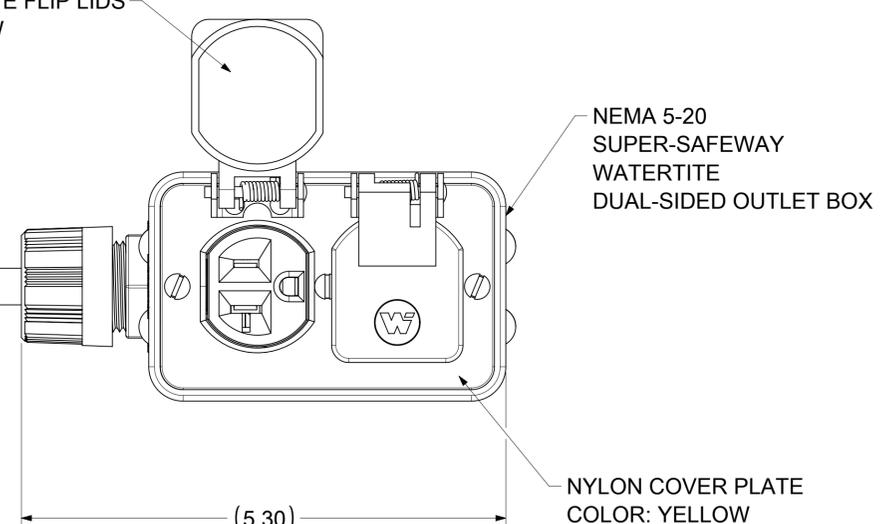

NEMA 5-20
SUPER-SAFEWAY
WATERTITE
DUAL-SIDED OUTLET BOX

NYLON COVER PLATE
COLOR: YELLOW

(5.30)

TECHNICAL
LISTED: UL & CSA
RATED SUPPLY VOLTAGE: 120VAC
RATED CURRENT: UP TO 15 AMPS
RESET TYPE: MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 4-6 mA
OVERLOAD CURRENT: 90 AMP 125 VAC
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENVIRONMENTAL RATING: RAINPROOF RATED

MATERIAL NO.	ENGINEERING NO.	DESCRIPTION
1301530140	20053W-2	20A. IN-LINE GFCI W/PLUG & BOX
1301530143	20053W-6	20A. IN-LINE GFCI W/PLUG & BOX
1301530223	130153-0223	20A. IN-LINE GFCI BOX, NO PLUG

FUNCTIONAL SYMBOLS FA = 0 FC = 0 FD = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SCALE 1:1		CURRENT REV DESC: NEW SALES DRAWING CREATED		
	DIMENSION UNITS INCH		GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 690704		
DIVISIONAL SYMBOLS	ANGULAR TOL ± °		4 PLACES ±		DRWN: VBASUTHKARP 2021/12/29		
	3 PLACES ±		2 PLACES ±		CHK'D: DNGUYEN62 2022/01/24		
	2 PLACES ±		1 PLACE ±		APPR: HKNEELAND 2022/03/03		
	1 PLACE ±		0 PLACES ±		INITIAL REVISION: DRWN: VBASUTHKARP 2021/12/29 APPR: HKNEELAND 2022/03/03		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING SERIES D-SIZE 130153		MATERIAL NUMBER CUSTOMER SEE TABLE GENERAL MARKET	
DOCUMENT NUMBER 1301530140		DOC TYPE PSD		DOC PART 000		REVISION A	
DOCUMENT STATUS P1		RELEASE DATE 2022/03/03 17:38:06		SHEET NUMBER 1 OF 1			

molex

IN-LINE GFCI WITH WATERTITE PLUG
AND PORTABLE OUTLET BOX

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER DOC TYPE DOC PART REVISION

1301530140

PSD 000 A

MATERIAL NUMBER CUSTOMER SHEET NUMBER

SEE TABLE GENERAL MARKET

1 OF 1