

# Data sheet | Item number: 2851-8302

DALI MSensor 02 5DPI 41W (Box installation)

www.wago.com/2851-8302



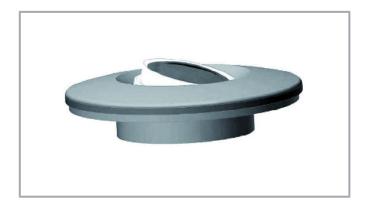

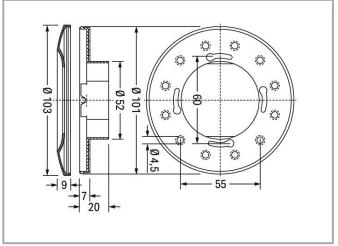

## Item description

The WAGO DALI MSensor 02 is used with WAGO DALI Modules (753-647 DALI Multi-Master Module or 750-641 DALI/DSI Module). It has been designed for the following principal applications:

- Individual offices
- Open-plan offices
- Training/presentation rooms
- Corridors, passageways and garages

The Multi-Sensor features both motion and light sensor. It may also be operated with an optional remote control from Tridonic. The sensor enables both motion detection and daylight-dependent lighting control, both of which can also be deactivated. Addressing is performed via rotary switch or WAGO DALI Configurator. Parameters can be adjusted individually using the configurator.

Power supply is provided via the DALI line.

The number of sensors, which can be operated on a DALI line, depends on the total power consumption of the specific devices and the address range for the actuators and sensors. Due to the capacity of the DALI bus, a maximum of 16 DALI sensor couplers may be operated on a DALI Multi-Master Module (753-647).

#### Installation notes:

- The DALI MSensor 02 is supplied directly via DALI line.
- DALI is not SELV (Safety Extra Low Voltage). The installation instructions for mains voltage therefore apply.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

### Data sheet | Item number: 2851-8302

www.wago.com/2851-8302



- The sensor's detection range must be within the lighting area of the controlled luminaires.
- The sensors' detection ranges must not overlap as this may impair the lighting control.
- When installed at a height other than the recommended installation height (2.5 m), the presence and light sensor might show different characteristics. If installed at a greater height, the sensitivity is reduced; the range is also reduced when installed at a lower height.
- Heaters, fans, printers and copiers located in the detection range may cause incorrect presence detection.

### Data

### Technical data

Current consumption (typ.)	6 mA from DALI line
Power supply	via DALI line
Material Data	
Weight	94 g

## **Environmental requirements**

Ambient temperature (operation)	0 +50 °C
Ambient temperature (storage)	-25 +55 °C
Protection type	IP20

## Commercial data

Product Group	31 (building automation components)
eCl@ss 10.0	27-14-31-44
eCl@ss 9.0	27-14-31-44
ETIM 8.0	EC001582
ETIM 7.0	EC001582
PU (SPU)	1 pcs
Packaging type	box
Country of origin	СН
GTIN	4050821708377
Customs tariff number	85423190000

## **Environmental Product Compliance**

RoHS Compliance Status	Compliant,No Exemption

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



# Approvals / Certificates

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
CE	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

# Downloads

## Documentation

#### Data sheet

2851-8301, 2851-8302, 2851-8303, DALI Multi-Sensor, data sheet		pdf 315.8 kB	Download
Bid Text			
2851-8302	2019 Feb 19	xml	Download
X81 - Datei		7.5 kB	
2851-8302	2017 Jul 11	doc	Download
doc - Datei		34.3 kB	
Additional Information			
Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 Aug 18	2.2 MB	

# **Application Notes**

Application Note CoDeSys 2.3

Application note: DALI 753-647 Configuration Interface	1.0.2	zip	Download
This application note describes the WAGO DALI Configurator, the integration of the	2019 Apr 29	3.1 MB	
DALI visualization for configuring various sensor types and the implementation in a			
program.			

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

# Data sheet | Item number: 2851-8302

www.wago.com/2851-8302



## CAD/CAE-Data

CAE data

WSCAD Universe 2851-8302 URL Download

**Installation Notes** 

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.