


## Schottky Barrier Rectifier

High Barrier Technology for Improved High Temperature Performance

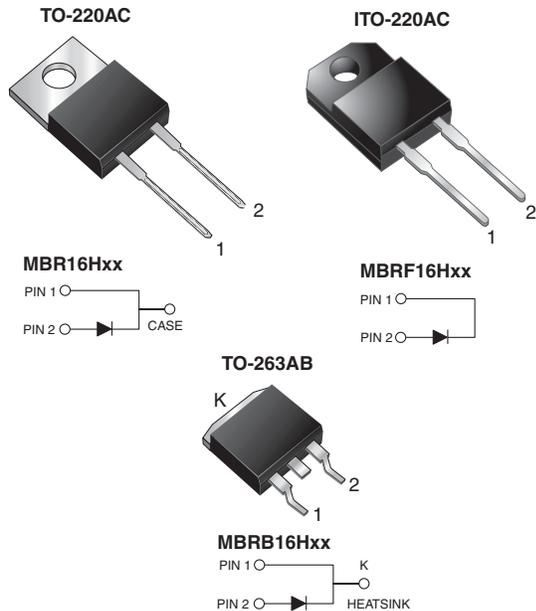

### FEATURES

- Power pack
- Guardring for overvoltage protection
- Low power loss, high efficiency
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High frequency operation
- Meets MSL level 1, per J-STD-020, LF maximum peak of 245 °C (for TO-263AB package)
- Solder bath temperature 275 °C maximum, 10 s, per JESD 22-B106 (for TO-220AC and ITO-220AC package)
- AEC-Q101 qualified
- Material categorization: For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**RoHS**  
COMPLIANT

### TYPICAL APPLICATIONS

For use in low voltage, high frequency rectifier of switching mode power supplies, freewheeling diodes, DC/DC converters, and polarity protection application.

### MECHANICAL DATA

**Case:** TO-220AC, ITO-220AC, TO-263AB

Molding compound meets UL 94 V-0 flammability rating  
Base P/N-E3 - RoHS-compliant, commercial grade  
Base P/NHE3 - RoHS-compliant, AEC-Q101 qualified

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102

E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

**Polarity:** As marked

**Mounting Torque:** 10 in-lbs maximum

### PRIMARY CHARACTERISTICS

$I_{F(AV)}$	16 A
$V_{RRM}$	35 V to 60 V
$I_{FSM}$	150 A
$V_F$	0.56 V, 0.62 V
$I_R$	100 $\mu$ A
$T_J$ max.	175 °C
Package	TO-220AC, ITO-220AC, TO-263AB
Diode variations	Single

### MAXIMUM RATINGS ( $T_C = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	MBR16H35	MBR16H45	MBR16H50	MBR16H60	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	35	45	50	60	V
Working peak reverse voltage	$V_{RWM}$	35	45	50	60	
Maximum DC blocking voltage	$V_{DC}$	35	45	50	60	
Maximum average forward rectified current (fig. 1)	$I_{F(AV)}$	16				A
Non-repetitive avalanche energy at 25 °C, $I_{AS} = 4$ A, $L = 10$ mH	$E_{AS}$	80				mJ
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	150				A
Peak repetitive reverse surge current at $t_p = 2.0$ $\mu$ s, 1 kHz	$I_{RRM}$	1.0		0.5		
Peak non-repetitive reverse energy (8/20 $\mu$ s waveform)	$E_{RSM}$	20				mJ
Electrostatic discharge capacitor voltage Human body model: $C = 100$ pF, $R = 1.5$ k $\Omega$	$V_C$	25				kV
Voltage rate of change (rated $V_R$ )	$dV/dt$	10 000				V/ $\mu$ s
Operating junction and storage temperature range	$T_J, T_{STG}$	- 65 to + 175				°C
Isolation voltage (ITO-220AC only) from terminal to heatsink $t = 1$ min	$V_{AC}$	1500				V



<b>ELECTRICAL CHARACTERISTICS</b> ( $T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)								
PARAMETER	SYMBOL	TEST CONDITIONS		MBR16H35 MBR16H45		MBR16H50 MBR16H60		UNIT
				TYP.	MAX.	TYP.	MAX.	
Maximum instantaneous forward voltage	$V_F$ <sup>(1)</sup>	$I_F = 16\text{ A}$	$T_J = 25\text{ }^\circ\text{C}$	-	0.66	-	0.73	V
		$I_F = 16\text{ A}$	$T_J = 125\text{ }^\circ\text{C}$	0.52	0.56	0.58	0.62	
Maximum reverse current	$I_R$ <sup>(2)</sup>	Rated $V_R$	$T_J = 25\text{ }^\circ\text{C}$	-	100	-	100	$\mu\text{A}$
			$T_J = 125\text{ }^\circ\text{C}$	6.0	20	4.0	20	mA

**Notes**<sup>(1)</sup> Pulse test: 300  $\mu\text{s}$  pulse width, 1 % duty cycle<sup>(2)</sup> Pulse test: Pulse width  $\leq 40\text{ ms}$ 

<b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)						
PARAMETER	SYMBOL	MBR	MBRF	MBRB	UNIT	
Typical thermal resistance, junction to case	$R_{\theta JC}$	1.5	3.0	1.5	$^\circ\text{C/W}$	

<b>ORDERING INFORMATION</b> (Example)					
PACKAGE	PREFERRED P/N	UNIT WEIGHT (g)	PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
TO-220AC	MBR16H45-E3/45	1.80	45	50/tube	Tube
ITO-220AC	MBRF16H45-E3/45	1.94	45	50/tube	Tube
TO-263AB	MBRB16H45-E3/45	1.33	45	50/tube	Tube
TO-263AB	MBRB16H45-E3/81	1.33	81	800/reel	Tape and reel
TO-220AC	MBR16H45HE3/45 <sup>(1)</sup>	1.80	45	50/tube	Tube
ITO-220AC	MBRF16H45HE3/45 <sup>(1)</sup>	1.94	45	50/tube	Tube
TO-263AB	MBRB16H45HE3/45 <sup>(1)</sup>	1.33	45	50/tube	Tube
TO-263AB	MBRB16H45HE3/81 <sup>(1)</sup>	1.33	81	800/reel	Tape and reel

**Note**<sup>(1)</sup> AEC-Q101 qualified



## RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

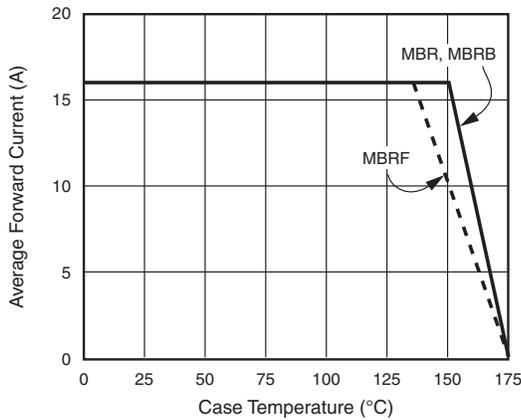


Fig. 1 - Forward Current Derating Curve

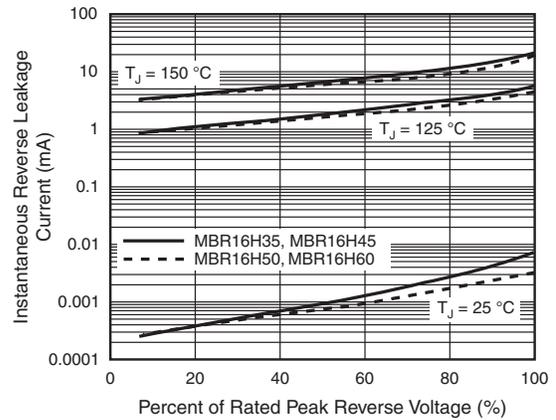


Fig. 4 - Typical Reverse Characteristics

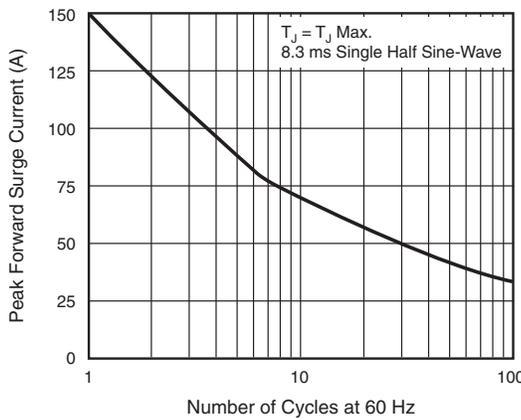


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

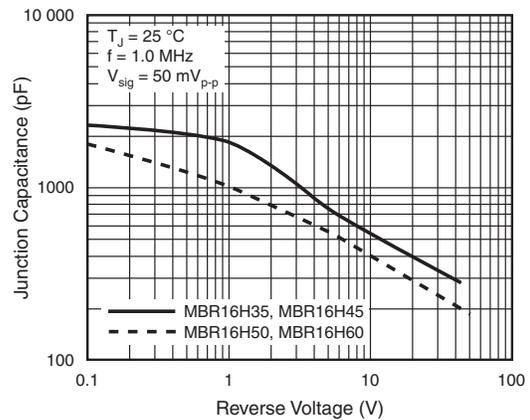


Fig. 5 - Typical Junction Capacitance

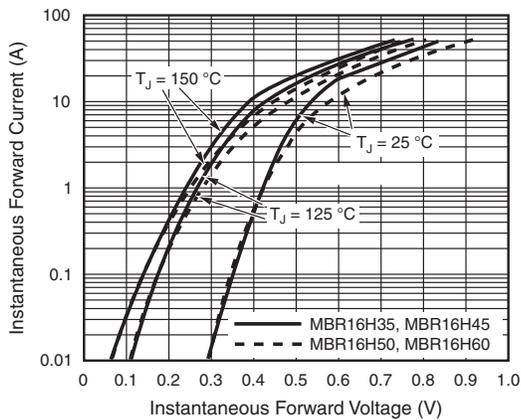


Fig. 3 - Typical Instantaneous Forward Characteristics


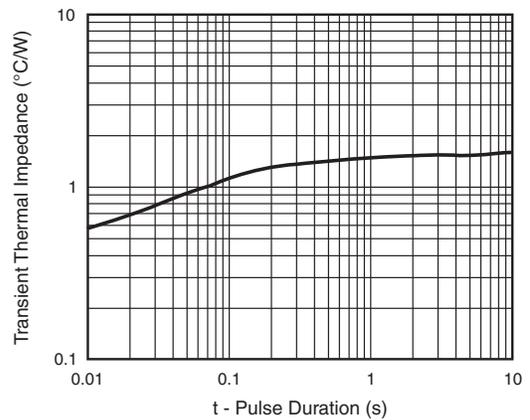


Fig. 6 - Typical Transient Thermal Impedance




### PACKAGE OUTLINE DIMENSIONS in inches (millimeters)


#### TO-220AC

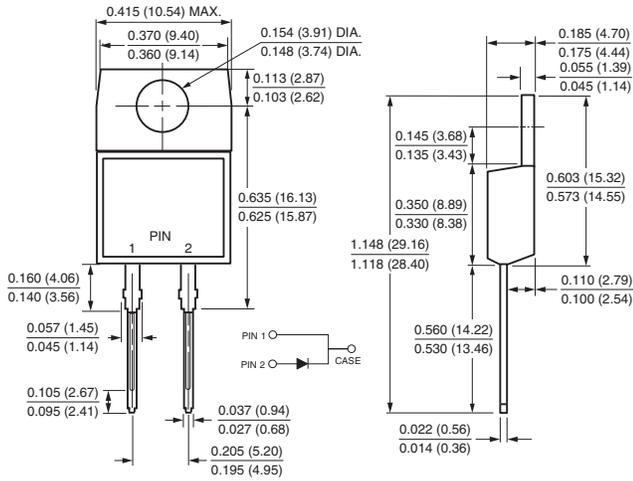

#### ITO-220AC

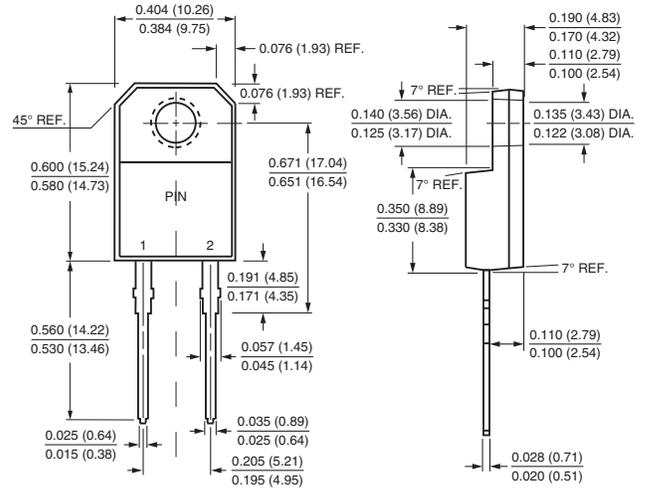

#### TO-263AB

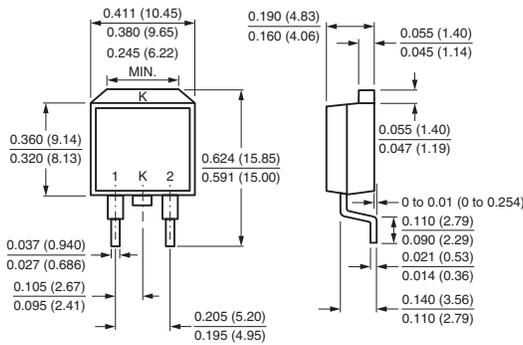

#### Mounting Pad Layout

