THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


| PANDUIT PART NUMBER | CONDUCTOR SIZE | A +/08 | D +/010 | E +/010 | PANDUIT DIE COLOR CODE PANDUIT DIE INDEX NUMBER (BURNDY DIE INDEX NUMBER) |
|------------------------|-------------------|-----------|------------|------------|---|
| SA6-X | #6 | 1.62 | 0.34 | 0.20 | GRAY DIE P29 (346) |
| SA4-XR | #4 | 1.88 | 0.47 | 0.27 | GREEN DIE P37 (375) |
| SA2-X | #2 | 2.00 | 0.53 | 0.31 | PINK DIE P42 (348) |
| SA1-X | #1 | 2.00 | 0.53 | 0.35 | GOLD DIE P45 (471) |
| SA1/0-X | 1/0 | 2.12 | 0.64 | 0.39 | TAN DIE P50 (296) |
| SA2/0-5 | 2/0 | 2.31 | 0.69 | 0.44 | OLIVE DIE P54 (297) |
| SA3/0-5 | 3/0 | 2.62 | 0.76 | 0.48 | RUBY DIE P60 (467) |
| SA4/0-5 | 4/0 | 2.72 | 0.88 | 0.55 | WHITE DIE P66 (298) |
| SA250-5 | 250 kcmil | 2.94 | 0.91 | 0.59 | RED DIE P71 (324) |
| SA300-2 | 300 kcmil | 3.12 | 1.01 | 0.65 | BLUE DIE P76 (470) |
| SA350-2 | 350 kcmil | 3.38 | 1.11 | 0.72 | BROWN DIE P87 (299) |
| SA400-2 | 400 kcmil | 3.75 | 1.19 | 0.76 | GREEN DIE P94 (472) |
| SA500-2 | 500 kcmil | 3.81 | 1.32 | 0.84 | PINK DIE P99 (300) |
| SA600-2 | 600 kcmil | 4.12 | 1.44 | 0.92 | BLACK DIE P106 (473) |
| SA750-1 | 750 kcmil | 4.62 | 1.59 | 1.03 | RED DIE P125 (301) |
| SA800-1 | 800 kcmil | 4.75 | 1.66 | 1.06 | GRAY DIE P140 (474) |
| SA1000-1 | 1000 kcmil | 5.25 | 1.84 | 1.19 | BROWN DIE P161 (302) |


<u>NOTES:</u>

- 1. MATERIAL: SEAMLESS ALUMINUM TUBING, TIN PLATED
- 2. BARREL COLOR CODED WITH DIE SET INDEX NUMBER
- 3. FOR STRANDED ALUMINUM AND COPPER WIRE
- 4. UL LISTED & CSA CERTIFIED TEMPERATURE RATED 90° C (AL9CU)
- 5. UL LISTED & CSA CERTIFIED VOLTAGE RATING 35 KV
- 6. ALL DIMENSIONS IN INCHES





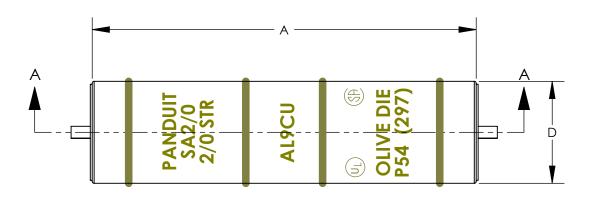

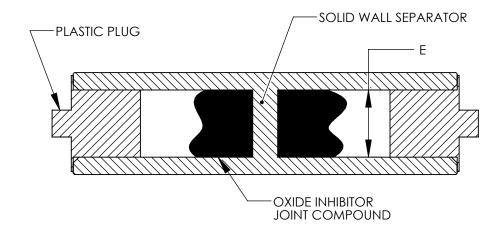

| | | | | | | | SA SERIES ALUMINUM SPLICES CUSTOMER DRAWING | | | |
|-----|------|------|------|-----|--|-----------------|---|--|--|--|
| | | | | | | | DATASET FILE NAME N41256BA-C41256/03 DATASET FILE NAME C41256/03 SI DDRW | | | |
| 03 | 3/15 | JHNU | JHNU | RGB | REVISED DIMENSIONS, REVISED NOTES ADDED BARREL MARKINGS ADDED COLOR CODE/DIE INDEX NUMBER REMOVED SA4-X, ADDED SA4-XR | N41256BA-C41256 | UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] | | | |
| 02 | 3/13 | JHNU | JHNU | RGB | CONVERTED DWG TO SOLIDWORKS MOVED SA300-SA1000 FROM DWG C41219 REVISED TITLE BLOCK | N41256BA-C41256 | .XX ± ANGLES ± | | | |
| REV | DATE | BY | СНК | APR | DESCRIPTION | ECN | DRAWN BY DATE 6/00 SKB SCALE NONE SHEET 1 OF 1 B | | | |