



ELECTRONICS, INC.  
44 FARRAND STREET  
BLOOMFIELD, NJ 07003  
(973) 748-5089  
<http://www.nteinc.com>

## NTE5742 & NTE5743 3 Phase Bridge Rectifier Modules

### Description:

The NTE5742 and NTE5743 powerblock modules are designed for three-phase full wave rectification and contain six diodes connected in a three-phase bridge configuration. The mounting base of the module is electrically isolated from the semiconductor elements for simple heatsink construction.

### Applications:

- Inverters for AC Motors
- Power Supply Units for DC Motors
- DC Power Supply Units for Battery Chargers
- General Purpose DC Power Supply Units

### Absolute Maximum Ratings:

Repetitive Peak Reverse Voltage,  $V_{RRM}$

<b>NTE5742</b> . . . . .	800V
<b>NTE5743</b> . . . . .	1600V

Non-Repetitive Peak Reverse Voltage,  $V_{RSM}$

<b>NTE5742</b> . . . . .	880V
<b>NTE5743</b> . . . . .	1760V

Average Output Current (50/60Hz, Sinewave),  $I_D$

<b>NTE5742</b> ( $T_C = +101^\circ C$ ) . . . . .	75A
<b>NTE5743</b> ( $T_C = +93^\circ C$ ) . . . . .	75A

Surge Forward Current (Rated Load Conditions),  $I_{FSM}$  . . . . . 1000A

Maximum  $I^2t$  for Fusing (Rated Load Conditions),  $I^2t$  . . . . . 4000A<sup>2</sup>sec

Operating Junction Temperature Range,  $T_J$  . . . . . -40° to +150°C

Storage Temperature Range,  $T_{stg}$  . . . . . -40° to +125°C

Isolation Breakdown Voltage (RMS, Main Terminal to Case, 1sec),  $V_{ISO}$  . . . . . 2500V




Thermal Resistance, Junction-to-Case,  $R_{thJC}$   
(50/60Hz Sinewave, Thermal Resistance for Total Loss) . . . . . 0.30°C/W

Thermal Resistance (With Thermal Compound),  $R_{thCF}$  . . . . . 0.06°C/W

## Electrical Characteristics:

Parameter	Symbol	Test Conditions	Rating	Unit
Maximum Repetitive Peak Reverse Current NTE5742	$I_{RRM}$	$T_J = +150^\circ\text{C}, V_{RRM} = 800\text{V}$	10	mA
NTE5743		$T_J = +150^\circ\text{C}, V_{RRM} = 1600\text{V}$	8	mA
Maximum Forward Voltage Drop NTE5742	$V_{FM}$	$T_J = +25^\circ\text{C}, I_{FM} = 100\text{A}$	1.15	V
NTE5743		$T_J = +25^\circ\text{C}, I_{FM} = 75\text{A}$	1.30	V

Circuit Diagram

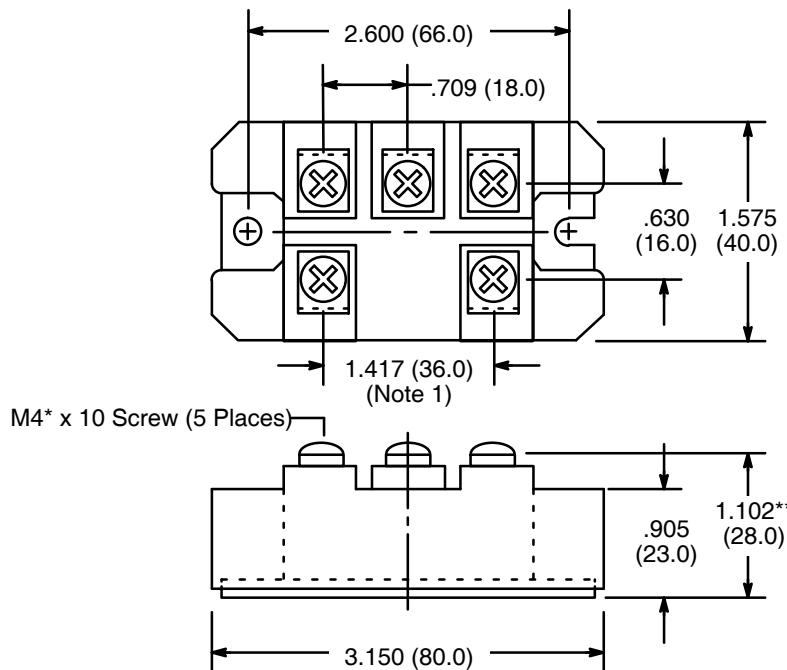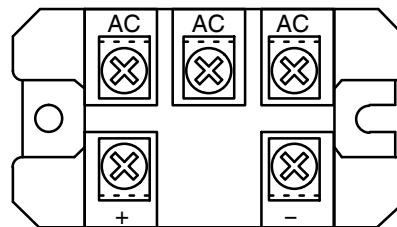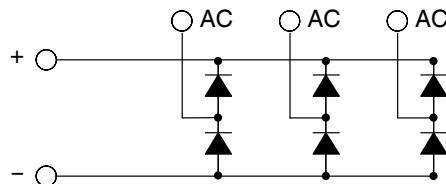

\*NTE5743 = M5 not M4   \*\*NTE5743 = 1.299 (33)

Note 1. Screws may be closer together at: 1.190 (30.0)