


# MTi-1

- **Smallest form factor on the market**
- **Easy integration**
- **Development Kit available**

The MTi-1 is the smallest industrial grade self-contained Inertial Measurement Unit (IMU) available on the market. The Xsens optimized strapdown algorithm (AttitudeEngine™) performs high-speed dead-reckoning calculations at 1 kHz, accurately capturing high-frequency motions. The MTi-1 is a cost-effective module for a wide range of (embedded) applications. It relieves you of the work of designing, integrating and maintaining gyroscopes, accelerometers and other sensors.

The MTi-1 is part of the MTi 1-series supported by the MT Software Suite, which includes MT Manager (GUI for Windows/Linux), SDK, example codes and drivers for many platforms.

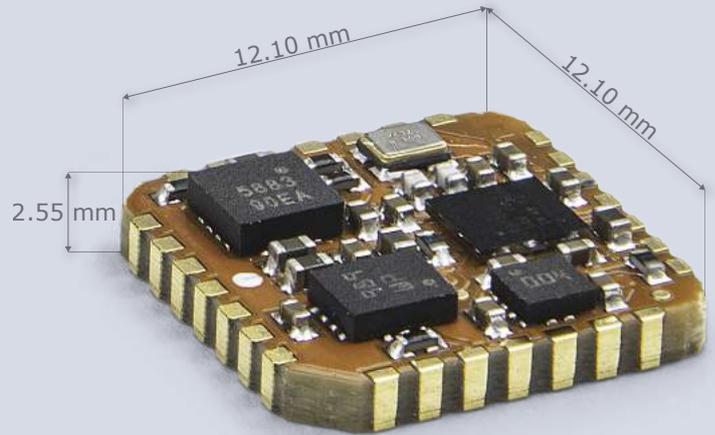

- 3D models available on request
- Available online via Digi-Key, Mouser, Farnell and local distributors
- For full specifications: please refer to the MTi-series datasheet available at [mtidocs.xsens.com](http://mtidocs.xsens.com)

## IMU Performance

Accelerometer	Calibrated
Gyroscope	Calibrated
Strapdown Integration (SDI)	Yes

## Gyroscope

Standard full range	2000 deg/s
In-run bias stability	10 deg/h
Bandwidth (-3dB)	230 Hz
Noise Density	0.003 °/s/√Hz
g-sensitivity (calibr.)	0.001 °/s/g

## Accelerometer

Standard full range	16 g
In-run bias stability	30 µg
Bandwidth (-3dB)	230 Hz
Noise Density	70 µg/√Hz

## Magnetometer

Standard full range	+/- 8 G
Total RMS noise	0.5 mG
Non-linearity	0.2%
Resolution	0.25 mG

## GNSS Receiver

GNSS receiver interface	n/a
GNSS precision	n/a
RTCM input port	n/a

## Barometer

Barometer interface	n/a
---------------------	-----

## Mechanical

IP-rating	IP00
Operating Temperature	-40 to 85 °C
Casing material	PCB
Mounting orientation	No restriction, full 360° in all axes
Dimensions	12.1 x 12.1 x 2.55 mm
Connector	SMD, footprint compatible with JEDEC PLCC-28
Weight	0.6 g

## Electrical

Input voltage	2.19 to 3.6V
Power consumption (typ)	44 mW @ 3V

## Interfaces / IO

Interfaces	UART, SPI, I²C
Sync Options	Yes
Protocols	Xbus
Clock drift	10 ppm
Output Frequency	Up to 2kHz
Built-in-self test	Gyr, Acc, Mag

## Software Suite

GUI (Windows/Linux)	MT Manager Firmware updater, Magnetic Field Mapper
SDK (Example code)	C++, C#, python, Matlab, Nucleo, public source code
Drivers	LabVIEW, ROS, GO
Support	BASE by XSSENS: online manuals, community and knowledge base