

CGHV96130F

130 W, 8.4 - 9.6 GHz, 50-ohm, Input/Output
Matched GaN HEMT

Description

Wolfspeed's CGHV96130F is a gallium nitride (GaN) High Electron Mobility Transistor (HEMT) on Silicon Carbide (SiC) substrates. This GaN Internally Matched (IM) FET offers excellent power added efficiency in comparison to other technologies. GaN has superior properties compared to silicon or gallium arsenide, including higher breakdown voltage, higher saturated electron drift velocity and higher thermal conductivity. GaN HEMTs also offer greater power density and wider bandwidths compared to GaAs transistors. This IM FET is available in a metal/ceramic flanged package for optimal electrical and thermal performance.



Package Type: 440217
PN: CGHV96130F

Typical Performance Over 8.4 - 9.6 GHz ($T_c = 25^\circ\text{C}$)

| Parameter | 8.4 GHz | 8.6 GHz | 8.8 GHz | 9.0 GHz | 9.2 GHz | 9.4 GHz | 9.6 GHz | Units |
|------------------------|---------|---------|---------|---------|---------|---------|---------|-------|
| Linear Gain | 13.6 | 13.1 | 13.3 | 13.5 | 13.8 | 13.0 | 11.8 | dB |
| Output Power | 184 | 173 | 173 | 168 | 163 | 165 | 153 | W |
| Power Gain | 8.7 | 8.4 | 8.4 | 8.3 | 8.0 | 8.2 | 7.8 | dB |
| Power Added Efficiency | 36 | 33 | 33 | 33 | 34 | 38 | 39 | % |

Note:

Measured in CGHV96130F-AMP (838179) under 100 μs pulse width, 10% duty, P_{IN} 44.0 dBm (25.1 W)

Features

- 8.4 - 9.6 GHz Operation
- 166 W P_{OUT} typical
- 7.5 dB Power Gain
- 42% Typical PAE
- 50 Ohm Internally Matched
- <0.3 dB Power Droop

Applications

- Marine Radar
- Weather Monitoring
- Air Traffic Control
- Maritime Vessel Traffic Control
- Port Security



Large Signal Models Available for ADS and MWO





Absolute Maximum Ratings (not simultaneous)

| Parameter | Symbol | Rating | Units | Conditions |
|---|-----------------|-----------|-------|---|
| Drain-source Voltage | V_{DSS} | 120 | V | 25°C |
| Gate-Source Voltage | V_{GS} | -10, +2 | | |
| Power Dissipation | P_{DISS} | 222.0 | W | Pulse |
| Storage Temperature | T_{STG} | -65, +150 | | |
| Operating Junction Temperature | T_J | 225 | °C | |
| Maximum Drain Current ¹ | I_{DMAX} | 12 | | |
| Maximum Forward Gate Current | I_{GMAX} | 28.8 | mA | 25°C |
| Soldering Temperature ² | T_S | 245 | °C | |
| Screw Torque | τ | 40 | in-oz | |
| Thermal Resistance, Junction to Case | $R_{\theta JC}$ | 0.73 | °C/W | Pulse Width = 100 μs, Duty Cycle = 10%, 85°C, $P_{DISS} = 173$ W |
| Case Operating Temperature ³ | T_c | -40, +150 | °C | |

Notes:

¹ Current limit for long term, reliable operation

² Refer to the Application Note on soldering at wolfspeed.com/rf/document-library

³ See also, the Power Dissipation De-rating Curve on Page 9

Electrical Characteristics (Frequency = 9.4 GHz unless otherwise stated; $T_c = 25^\circ C$)

| Characteristics | Symbol | Min. | Typ. | Max. | Units | Conditions |
|---------------------------------------|--------------|------|------|------|-------|---|
| DC Characteristics¹ | | | | | | |
| Gate Threshold Voltage | $V_{GS(th)}$ | -3.8 | -3.0 | -2.3 | V | $V_{DS} = 10$ V, $I_D = 28.8$ mA |
| Gate Quiescent Voltage | $V_{GS(Q)}$ | — | -2.7 | — | | $V_{DS} = 40$ V, $I_D = 1000$ mA |
| Saturated Drain Current ² | I_{DS} | 21.0 | 26.0 | — | A | $V_{DS} = 6.0$ V, $V_{GS} = 2.0$ V |
| Drain-Source Breakdown Voltage | V_{BD} | 100 | — | — | | $V_{GS} = -8$ V, $I_D = 28.8$ mA |
| RF Characteristics³ | | | | | | |
| Small Signal Gain | S21 | 10.5 | 12.2 | — | dB | $V_{DD} = 40$ V, $I_{DQ} = 1000$ mA, $P_{IN} = -20$ dBm |
| Input Return Loss at 8.4 - 9.4 GHz | S11 | — | -5.4 | — | | |
| Input Return Loss at 9.4 - 9.6 GHz | | — | -5.6 | — | | |
| Output Return Loss | S22 | — | -8.8 | — | | |
| Power Output ^{3,4} | P_{OUT} | 130 | 166 | — | W | $V_{DD} = 40$ V, $I_{DQ} = 1000$ mA, $P_{IN} = 44$ dBm |
| Power Added Efficiency ^{3,4} | PAE | 30 | 42 | — | | |
| Power Gain ^{3,4} | P_G | 7.0 | 7.5 | — | dB | No damage at all phase angles, $V_{DD} = 40$ V, $I_{DQ} = 1000$ mA |
| Output Mismatch Stress | VSWR | — | — | 5:1 | | |

Notes:

¹ Measured on wafer prior to packaging

² Scaled from PCM data

³ Measured in CGHV96100F2-TB (838179) under 100 μs pulse width, 10% duty

⁴ Fixture loss de-embedded using the following offsets: Frequency = 9.4 GHz. Input = 0.5 dB and Output = 0.5 dB

CGHV96130F Typical Performance

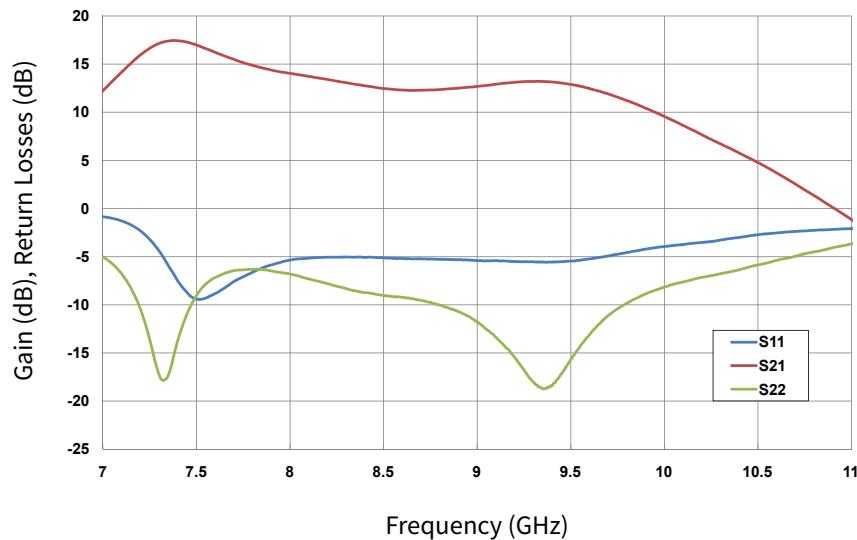


Figure 1. Small Signal Gain and Return Loss vs Frequency
of CGHV96130F measured in CGHV96130F-AMP
 $V_{DS} = 40$ V, $I_{DQ} = 1000$ mA

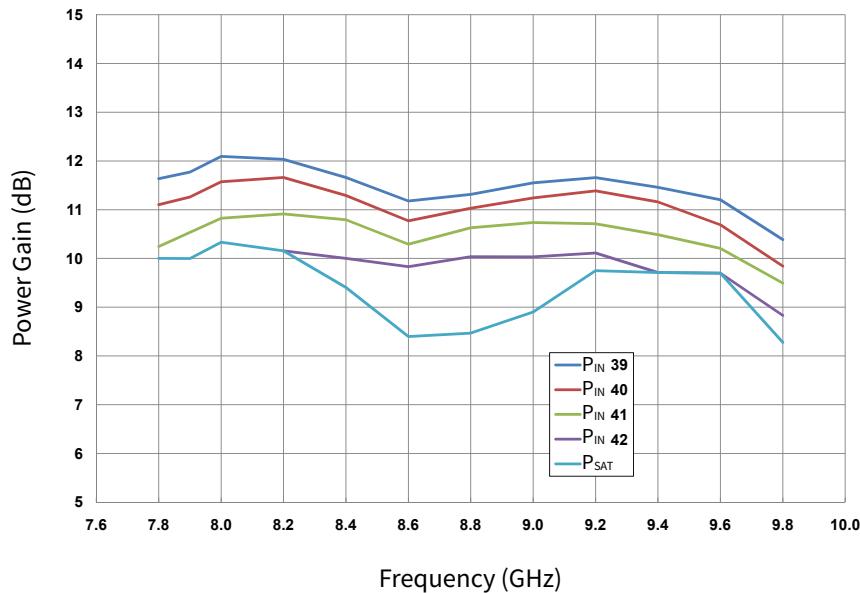


Figure 2. Power Gain vs. Frequency and Input Power
 $V_{DD} = 40$ V, Pulse Width = 100 μ sec, Duty Cycle = 10%

CGHV96130F Typical Performance

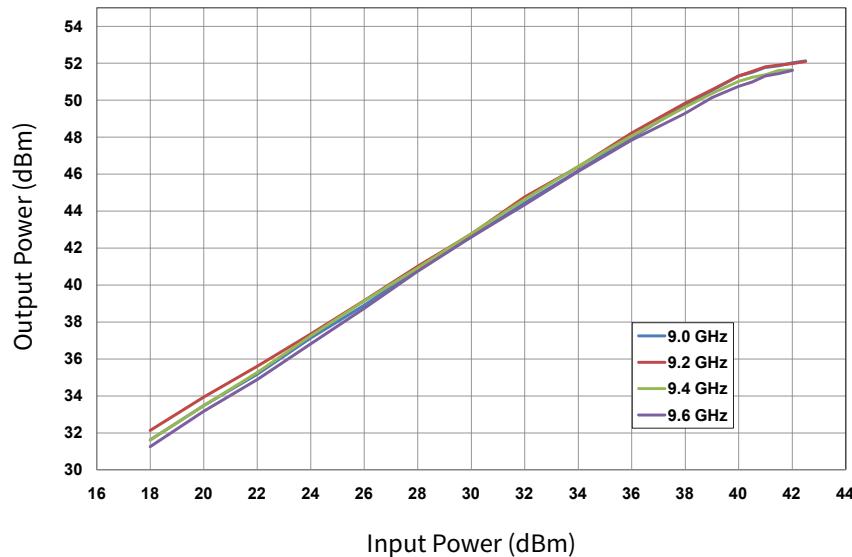


Figure 3. Output Power vs. Input Power
 $V_{DD} = 40$ V, Pulse Width = 100 μ sec, Duty Cycle = 10%

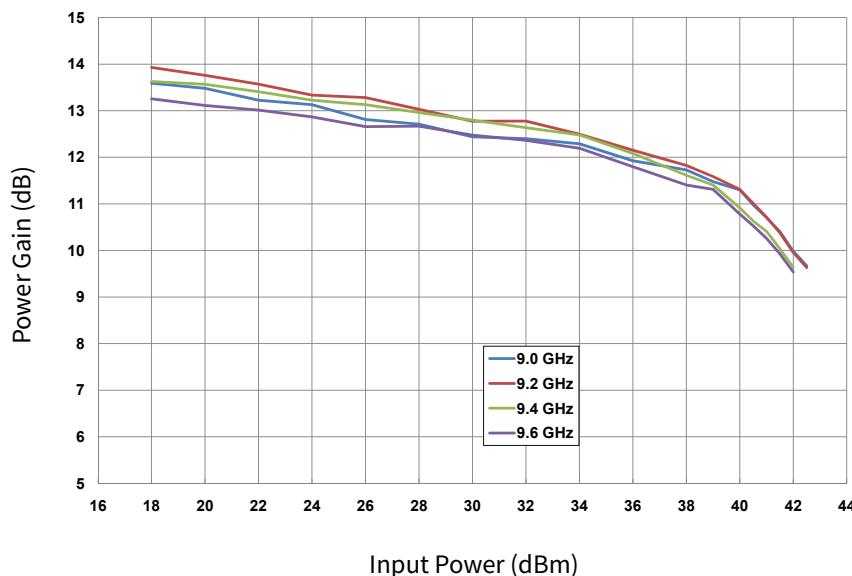


Figure 4. Power Gain vs. Frequency and Input Power
 $V_{DD} = 40$ V, Pulse Width = 100 μ sec, Duty Cycle = 10%

CGHV96130F Typical Performance

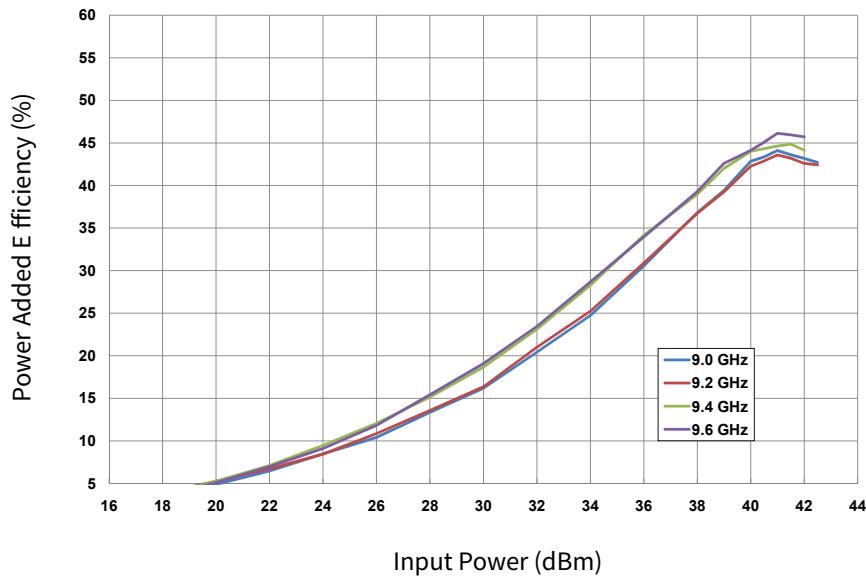


Figure 5. Power Added Efficiency vs. Input Power
 $V_{DD} = 40$ V, Pulse Width = 100 μ sec, Duty Cycle = 10%

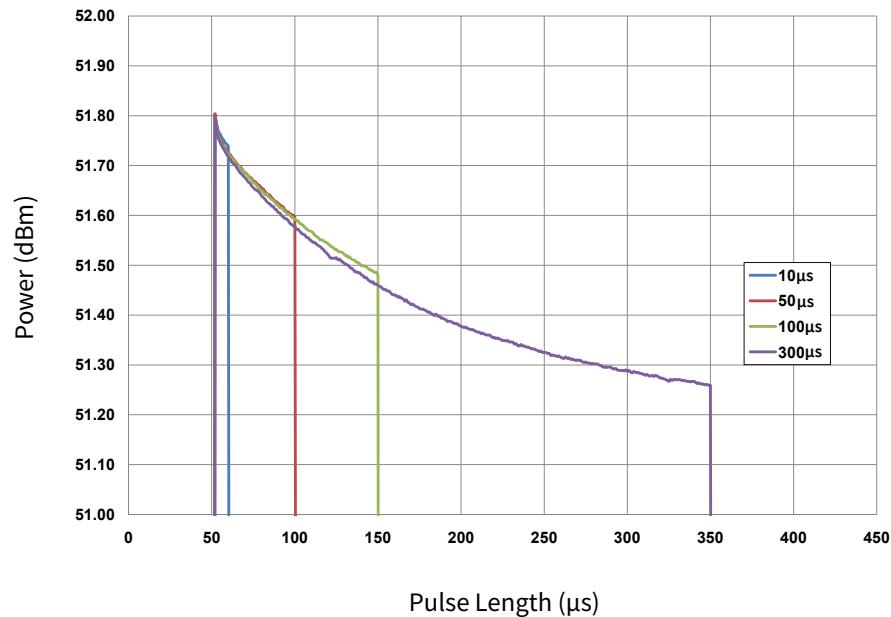


Figure 6. Output Power vs. Time
 $V_{DD} = 40$ V, $P_{IN} = 41$ dBm, Duty Cycle = 10%

CGHV96130F Typical Performance

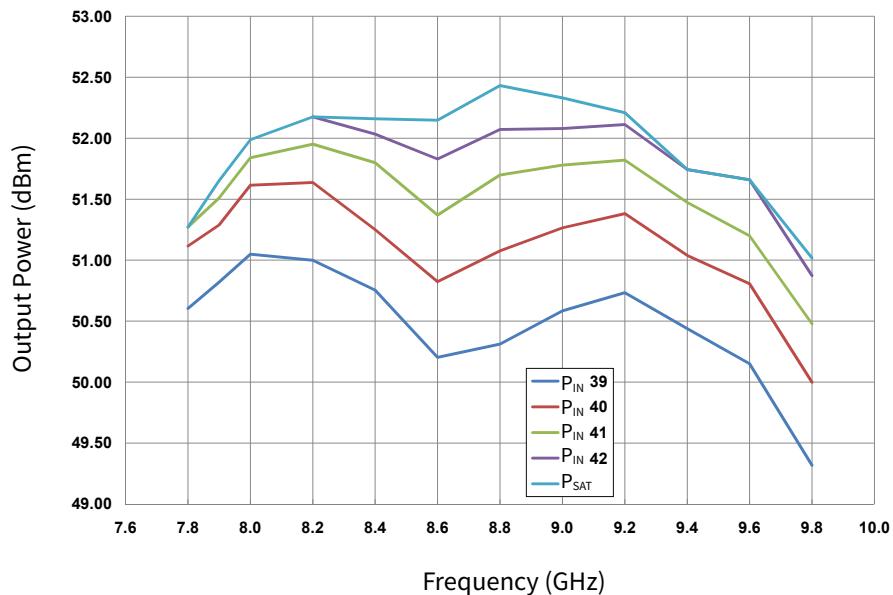


Figure 7. Output Power vs. Input Power & Frequency
 $V_{DD} = 40$ V, Pulse Width = 100 μ sec, Duty Cycle = 10%

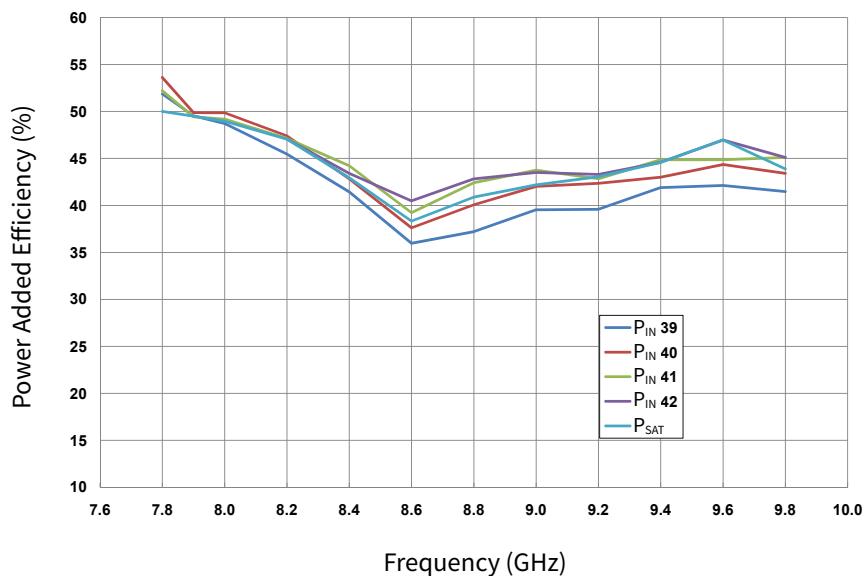



Figure 8. Power Added Efficiency vs. Input Power & Frequency
 $V_{DD} = 40$ V, Pulse Width = 100 μ sec, Duty Cycle = 10%




CGHV96130F-AMP Demonstration Amplifier Circuit Bill of Materials

| Designator | Description | Qty |
|------------|--|-----|
| R1 | RES, 47 OHM +/-1%, 1/16 W, 0603, SMD | 1 |
| C1, C11 | CAP, 1.6pF, +/- 0.1pF, 200V, 0402, ATC 600L | 2 |
| C2, C12 | CAP, 1.0pF, +/- 0.1pF, 200V, 0402 ATC 600L | 2 |
| C3, C13 | CAP, 10pF +/-5%, 0603, ATC | 2 |
| C4, C14 | CAP, 470pF +/-5%, 100 V, 0603 | 2 |
| C5, C15 | CAP, 33,000pF, 0805, 100 V, X7R | 2 |
| C6 | CAP, 10μF, 16 V, TANTALUM | 1 |
| C18 | CAP, 470μF +/-20%, ELECTROLYTIC | 1 |
| J1,J2 | CONNECTOR, SMA, PANEL MOUNT JACK, FLANGE, 4-HOLE, BLUNT POST, 20MIL | 2 |
| J3 | CONNECTOR, HEADER, RT>PLZ .1CEN LK 9POS | 1 |
| J4 | CONNECTOR, SMB, STRAIGHT JACK | 1 |
| | PCB, TEST FIXTURE, TACONICS RF35P, 20 MIL THK, 440210 PKG | 1 |
| | 2-56 SOC HD SCREW 1/4 SS | 4 |
| | #2 SPLIT LOCKWASHER SS | 4 |
| Q1 | CGHV96130F | 1 |


CGHV96130F-AMP Demonstration Amplifier Circuit Schematic

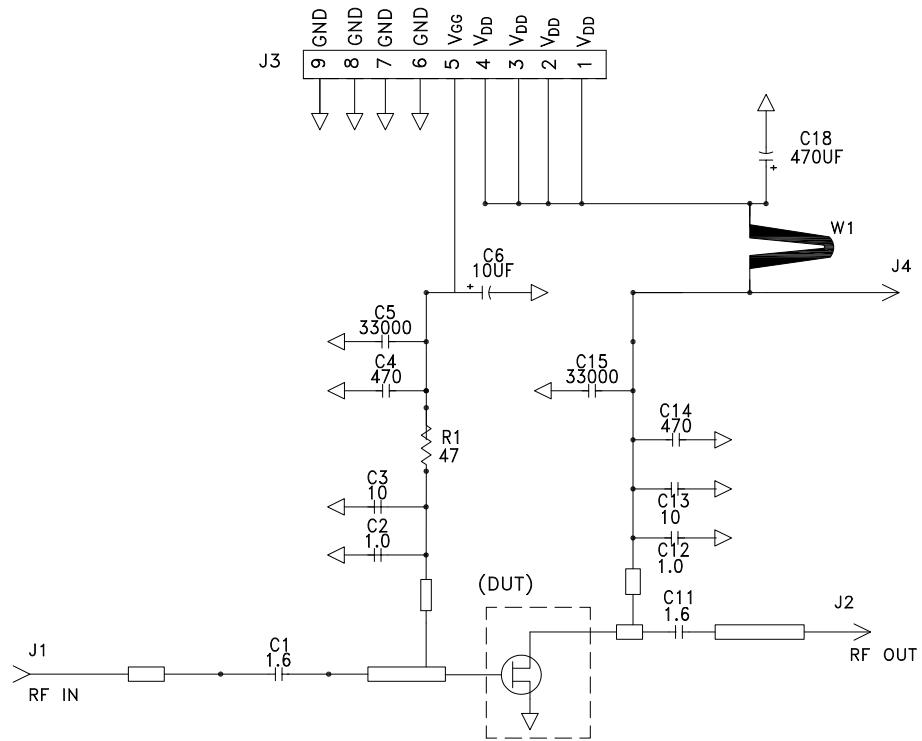

CGHV96130F-AMP Demonstration Amplifier Circuit Outline

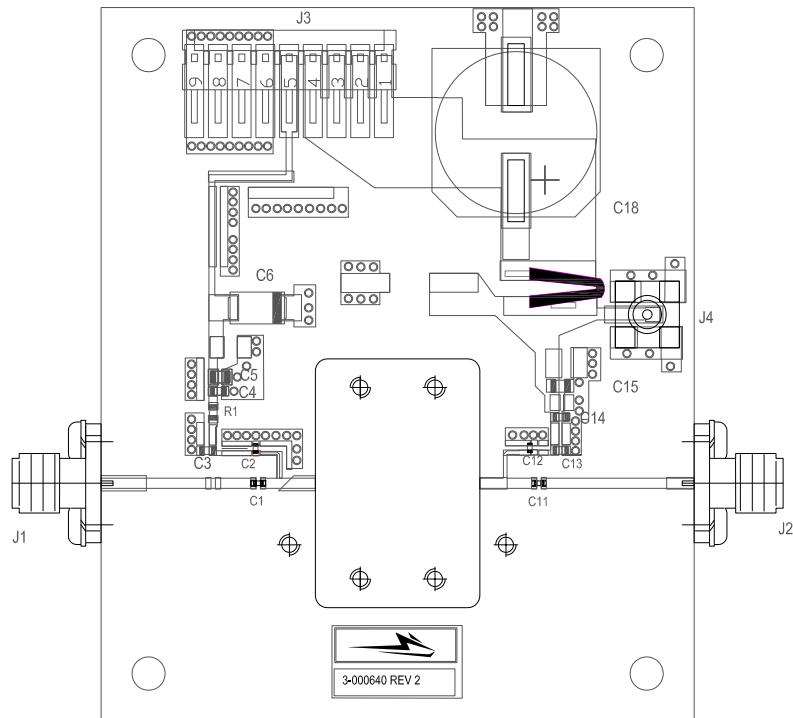


CGHV96130F Power Dissipation De-rating Curve

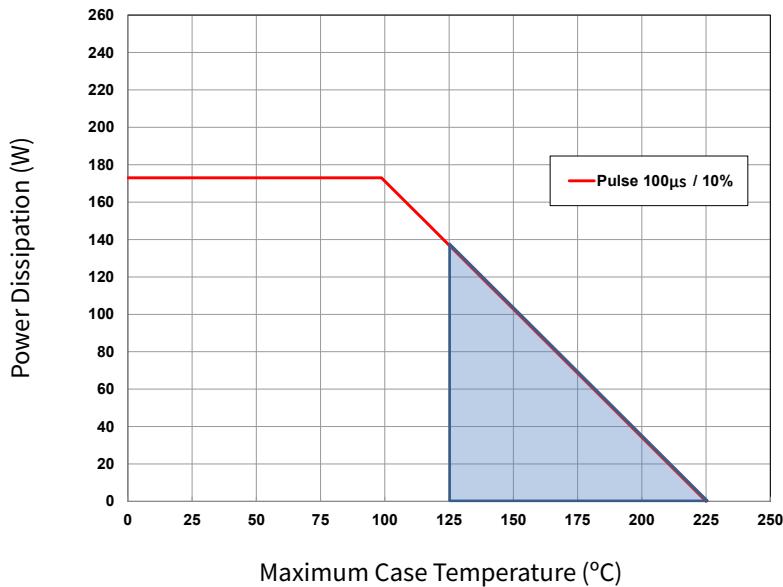

Note:

¹ Shaded area exceeds Maximum Case Operating Temperature (See Page 2)


CGHV96130F Transient Curve

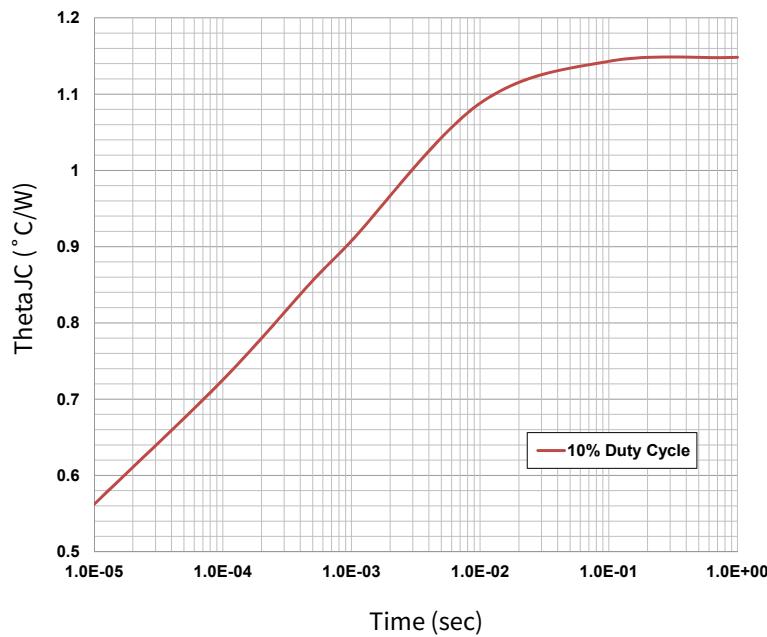

Electrostatic Discharge (ESD) Classifications

| Parameter | Symbol | Class | Classification Level | Test Methodology |
|---------------------|--------|-------|--------------------------------|---------------------|
| Human Body Model | HBM | TBD | ANSI/ESDA/JEDEC JS-001 Table 3 | JEDEC JESD22 A114-D |
| Charge Device Model | CDM | TBD | ANSI/ESDA/JEDEC JS-002 Table 3 | JEDEC JESD22 C101-C |

Product Dimensions CGHV96130F (Package Type – 440217)

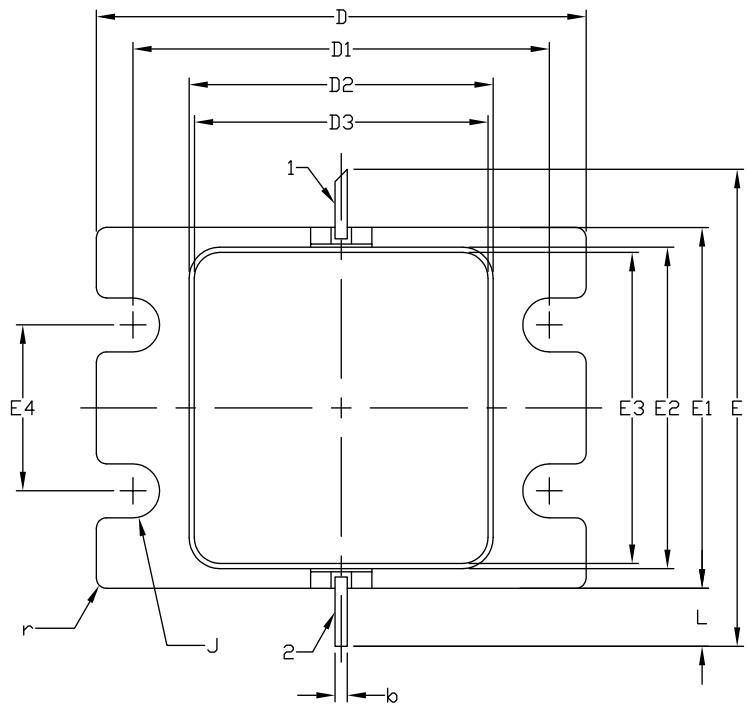

.002

1. GATE
2. DRAIN

| DIM | INCHES | | MILLIMETERS | | NOTES |
|-----|--------|--------|-------------|-------|-------|
| | MIN | MAX | MIN | MAX | |
| A | 0.188 | 0.198 | 4.78 | 5.03 | |
| A1 | 0.088 | 0.100 | 2.24 | 2.54 | 2x |
| A2 | 0.049 | 0.061 | 1.24 | 1.55 | |
| b | 0.022 | 0.026 | 0.56 | 0.66 | 2x |
| c | 0.002 | 0.006 | 0.05 | 0.15 | |
| D | 0.935 | 0.955 | 23.75 | 24.26 | |
| D1 | 0.797 | 0.809 | 20.24 | 20.55 | 2x |
| D2 | 0.581 | 0.593 | 14.76 | 15.06 | |
| D3 | 0.563 | 0.571 | 14.30 | 14.50 | |
| E | 0.906 | | 23.01 | | REF |
| E1 | 0.679 | 0.691 | 17.25 | 17.55 | |
| E2 | 0.604 | 0.616 | 15.34 | 15.65 | |
| E3 | 0.586 | 0.594 | 14.88 | 15.09 | |
| E4 | 0.309 | 0.321 | 7.85 | 8.15 | 2x |
| J | Ø0.097 | Ø0.107 | Ø2.46 | Ø2.72 | 4x |
| L | 0.090 | 0.130 | 2.29 | 3.30 | 2x |
| r | 0.02 | TYP | 0.51 | TYP | 12x |

A1

A2

C



Part Number System



Table 1.

| Parameter | Value | Units |
|------------------------------|--------|-------|
| Upper Frequency ¹ | 9.6 | GHz |
| Power Output | 130 | W |
| Package | Flange | — |

Note:

¹ Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Table 2.

| Character Code | Code Value |
|----------------|--------------------------------|
| A | 0 |
| B | 1 |
| C | 2 |
| D | 3 |
| E | 4 |
| F | 5 |
| G | 6 |
| H | 7 |
| J | 8 |
| K | 9 |
| Examples | 1A = 10.0 GHz 2H = 27.0 GHz |



Product Ordering Information

| Order Number | Description | Unit of Measure | Image |
|----------------|--------------------------|-----------------|---|
| CGHV96130F | GaN HEMT | Each | A close-up photograph of a GaN HEMT die. It is a square-shaped semiconductor chip with a gold-colored metal lead frame underneath. The chip itself is silver-colored with some internal circuitry visible. A small red label on the lead frame reads "CGHV96130F C12370". |
| CGHV96130F-AMP | Test board with GaN HEMT | Each | A photograph of a blue printed circuit board (PCB) used for testing. The board is populated with various electronic components, including a central white chip (the GaN HEMT die), resistors, capacitors, and connectors. Two black cables are attached to the board, one with a circular component and another with a smaller component. |

**For more information, please contact:**

4600 Silicon Drive
Durham, NC 27703 USA
Tel: +1.919.313.5300
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com

Notes & Disclaimer

Specifications are subject to change without notice. "Typical" parameters are the average values expected by Wolfspeed in large quantities and are provided for information purposes only. Wolfspeed products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

©2015-2022 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc.
PATENT: <https://www.wolfspeed.com/legal/patents>

The information in this document is subject to change without notice.