

REVISIONS									
REV	ECO	DESCRIPTION	DATE	BY	APPR				
A1	-	RELEASED DRAWING	APR-16-2020	BLINK	TOMMY				

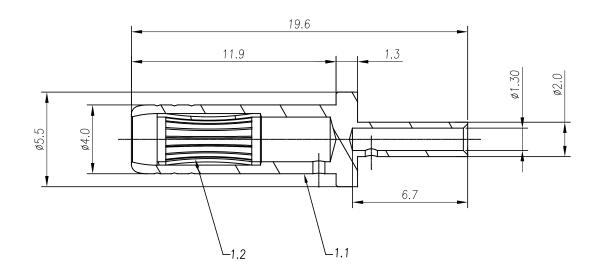

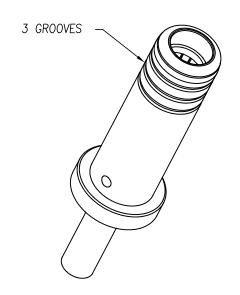

2.4MM, FEMALE SURESOCKET™

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:

1.1 CONTACT BODY: COPPER ALLOY, SILVER PLATED.

1.2 CROWN SRPRING CONTACT: COPPER ALLOY, GOLD FLASH.

2. SPECIFICATIONS:

2.1 CURRENT RATING: 12A(MAX).
2.2 TERMINATION TYPE: CRIMPING.

2.3 WIRE RANGE: 18~20AWG.

3. SUITABLE SOCKET TYPE: SC000611&SC000565.

**4.** Rohs Compliant.

5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

QUANTITY PART NUMBER		DESCRIPTION							
MATERIALS LIST									
UNLESS OTHERWISE SPECIFIED  1) All dimensions are in metric(mm).	SIGNATURES DATE		Amphenol						
Tolerances are as follows:     PL DEC ±0.30   Fractions ±1/64	DRAWN: BLINK	APR-15-2020	Amphenoi						
2 PL DEC ±0.15 3 PL DEC ±0.08	CHECKED: ORION	APR-17-2020	44724 Morley Drive Clinton Township, MI 48036						
3) Note reference = X	ENGINEER:								
MATERIAL SPECIFICATIONS:	APPROVAL: TOMMY	APR-20-2020							
	CUSTOMER:		2.4MM, FEMALE SURESOCKET™ MACHINED SOCKET, 18-20AWG						
PROCESS SPECIFICATIONS:	SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUIR JECT TO NORMAL								
			B c-	SC000706	A1				
NEXT ASS'Y:			SCALE: NONE	SHEET 1 OF	1				