

Customer Information Sheet

DRAWING No.: M20-106XX00


IF IN DOUBT - ASK



NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

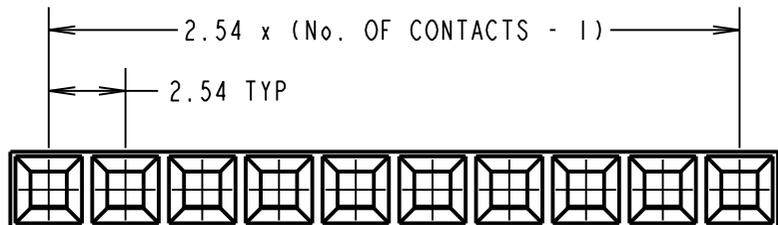

SPECIFICATIONS:

ELECTRICAL:

- CURRENT RATING = 3A AC/DC
- VOLTAGE RATING = 250V AC MAX
- CONTACT RESISTANCE = 20mΩ MAX
- INSULATION RESISTANCE = 1,000MΩ MIN
- DIELECTRIC STRENGTH = 800V AC FOR 1 MINUTE

ENVIRONMENTAL:

TEMPERATURE RANGE = -25°C TO +85°C

ORDER CODE:



M20-106XX00

No. OF CONTACTS:

01 to 10, 12

OBSOLETE

**No. of contacts per row = 11
Last Time Buy = 19th July 2019**

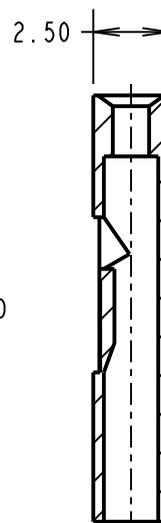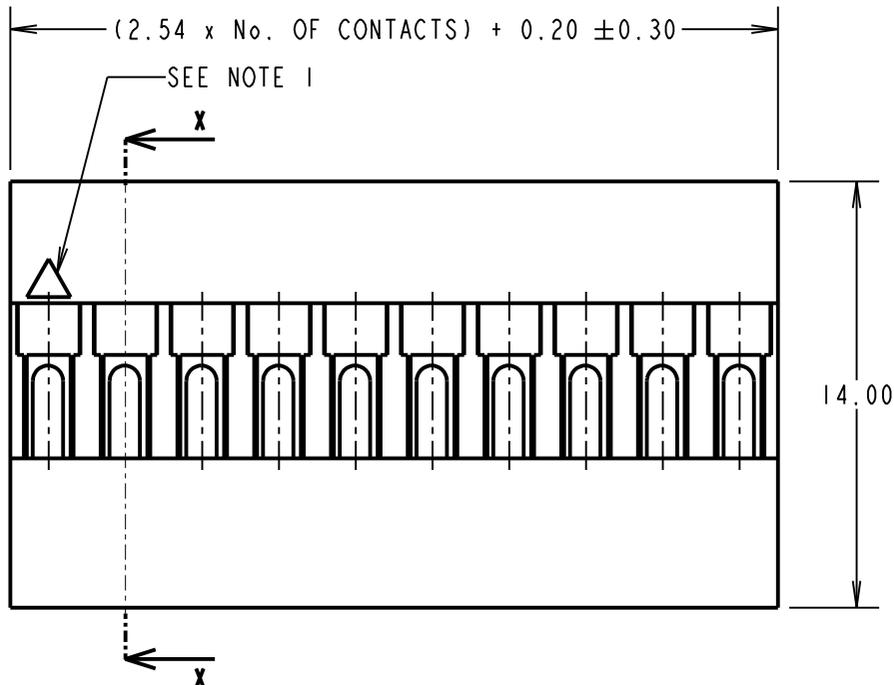

SECTION X-X

NOTES:

1. CONTACT No. 1 IDENTIFICATION.
2. FOR USE WITH CRIMP CONTACTS:
M20-11600XX (REELED CONTACTS),
M20-11800XX (LOOSE CONTACTS).
3. THE ABOVE SPECIFICATIONS APPLY WHEN THIS MOULDING IS USED WITH THE SPECIFIED CONTACTS.
4. FOR COMPLETE ELECTRICAL AND MECHANICAL SPECIFICATION, SEE COMPONENT SPECIFICATION C001XX (LATEST ISSUE).
5. MATING PIN LENGTH = 6.30mm MAX
5.50mm MIN

MGP	8	27.02.19	21370
NAME	ISS.	DATE	C/NOTE
APPROVED: MGP			
CHECKED: SB			
DRAWN: S.BENNETT			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
PPE+PS
UL94V-1 BLACK
FINISH:
S/AREA: mm²

TITLE:
2.54mm PITCH SIL
CRIMP MOULDING

DRAWING NUMBER:
M20-106XX00

SHT
2 OF 2