## BC846T SERIES BC847T SERIES

# SURFACE MOUNT NPN SILICON TRANSISTOR



SOT-523 CASE



www.centralsemi.com

# **DESCRIPTION:**

The CENTRAL SEMICONDUCTOR BC846T and BC847T Series types are NPN Silicon Transistors manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for general purpose switching and amplifier applications.

# MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE

MAXIMUM RATINGS: (T <sub>A</sub> =25°C) Collector-Base Voltage Collector-Emitter Voltage Emitter-Base Voltage Continuous Collector Current Peak Collector Current Peak Base Current Power Dissipation Operating and Storage Junction Temperature Thermal Resistance		SYME VCB VCB VEB IC ICM IBM PD TJ, T	O O O I I I	<b>BC847T</b> 50 45	5.0 100 200 100 250 -65 to +1 500	BC846T 80 65	UNII V V W/ M/ M/ M/ C °C/	A A A A V		
ELECTRICAL CHARACTERISTICS: (T <sub>A</sub> =25°C unless otherwise noted)										
SYMBOL	TEST CONDITIONS	MIM		TYP		MAX	UNI	TS		
ICBO	V <sub>CB</sub> =30V					15	n/	4		
I <sub>CBO</sub>	V <sub>CB</sub> =30V, T <sub>A</sub> =150°C					5.0	μA	4		
I <sub>EBO</sub>	V <sub>EB</sub> =5.0V					100	n/			
BVCBO	I <sub>C</sub> =10μA (BC847T)	50					V			
BV <sub>CBO</sub>	I <sub>C</sub> =10μA (BC846T)	80					V			
BVCEO	I <sub>C</sub> =10mA (BC847T)	45					V			
BVCEO	I <sub>C</sub> =10mA (BC846T)	65					V			
BVEBO	I <sub>E</sub> =10μA	5.0	)				V			
VCE(SAT)	I <sub>C</sub> =10mA, I <sub>B</sub> =0.5mA					0.20	V			
VCE(SAT)	I <sub>C</sub> =100mA, I <sub>B</sub> =5.0mA					0.40	V			
VBE(ON)	I <sub>C</sub> =2.0mA, V <sub>CE</sub> =5.0V	0.5	8			0.70	V			
V <sub>BE</sub> (ON)	I <sub>C</sub> =10mA, V <sub>CE</sub> =5.0V					0.77	V			
f <sub>T</sub> ` ′	V <sub>CE</sub> =5.0V, I <sub>C</sub> =10mA, f=100MHz	100	)				MH	lz		
$C_{c}$	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1.0MHz					1.5	pF	=		
$C_e$	V <sub>EB</sub> =0.5V, I <sub>C</sub> =0, f=1.0MHz			11			pF	=		
NF	V <sub>CF</sub> =5.0V, I <sub>C</sub> =200μA,									
	$R_S=2.0K\Omega$ f=1.0KHz, BW=200Hz					10	dE	3		
	-	BC840	SAT		BC846	вт				
		BC84			BC847		BC84	7СТ		
		MIN	MAX			MAX	MIN	MAX		
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =2.0mA	110	220		200	450	420	800		


## BC846T SERIES BC847T SERIES





## **SOT-523 CASE - MECHANICAL OUTLINE**

# **BOTTOM VIEW**

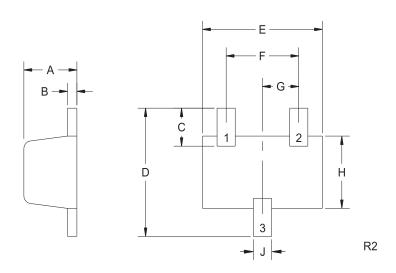

# **LEAD CODE:**

- 1) BASE
- 2) EMITTER
- 3) COLLECTOR

DEVICE	MARKING CODE		
BC846AT	GT1		
BC846BT	GT2		
BC847AT	GT3		
BC847BT	GT4		
BC847CT	GT5		

DIMENSIONS									
	INC	HES	MILLIMETERS						
SYMBOL	MIN	MAX	MIN	MAX					
Α	0.023	0.031	0.58	0.78					
В	0.002	0.008	0.04	0.20					
С	C 0.013 0.02		0.34	0.54					
D	0.059	0.067	1.50	1.70					
Е	0.059	0.067	1.50	1.70					
F	0.035	0.043	0.90	1.10					
G	0.0	)20	0.50						
Н	0.031	0.039	0.78	0.98					
J	0.010	0.014	0.25	0.35					

SOT-523 (REV: R2)

R1 (20-November 2009)

### **OUTSTANDING SUPPORT AND SUPERIOR SERVICES**



#### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- · Inventory bonding
- · Consolidated shipping options

- · Custom bar coding for shipments
- · Custom product packing

#### **DESIGNER SUPPORT/SERVICES**

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free guick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- · Custom electrical curves
- · Environmental regulation compliance
- · Customer specific screening
- · Up-screening capabilities

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits
- Custom product and package development

### REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

#### **CONTACT US**

## Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110 Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

**Worldwide Distributors:** 

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: <a href="https://www.centralsemi.com/terms">www.centralsemi.com/terms</a>

www.centralsemi.com (001)