
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.								
	Material	High Conductivity Seamless Copper Tube						
	Plating	Electro-Tin		.27±.02 DIA				
	Wire Size	14 - 10 AWG STR, 12 - 10 AWG SOL						
	Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		.27				
	Wire Strip Length	9/16 in.	<b>†</b>					
	Stud Size	1/4 in.	.42±.04	G 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4				
	UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	_ <b>↓</b> .25±.04 −	.50±.02 .13 REF.				
	UL Temperature Rating	90° C		63±.02				
	C.S.A Certified Wire Connector	Yes		1.93±.06				
	Panduit Color Code on Barrel	N/A						
	Panduit Die Index No. on Barrel	N/A						
	Alternate Industry Die Index No. ( ) on Barrel	N/A		Wire inspection window				





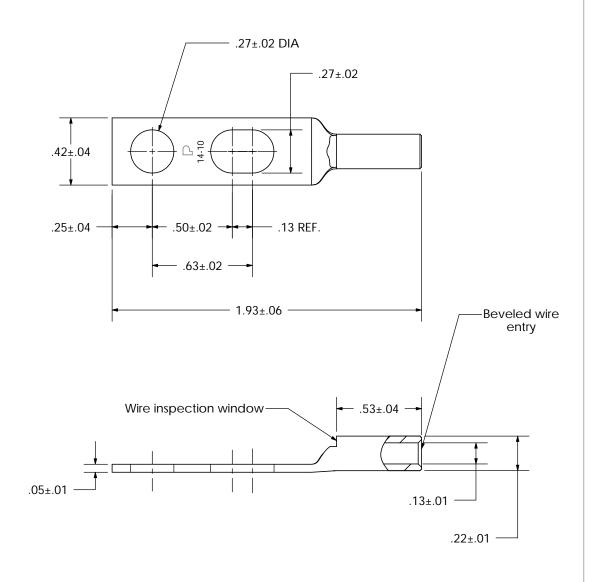

						CORP. TINLEY PARK, ILLINOIS
						LCC10-14JAW-L
01	12/04	JHNU	JHNU	REVISED WIRE SIZE	12305 <sup>C</sup>	Copper Lug - Slotted Two-Hole, Long Barrel with Windo
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCC10-14JAW-CUST