

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: 2.0 to 4.0 GHz

1.2 FREQ. SENSITIVITY: SEE TABLE

1.3 COUPLING: SEE TABLE

1.4 VSWR (MAX): 1.15:1

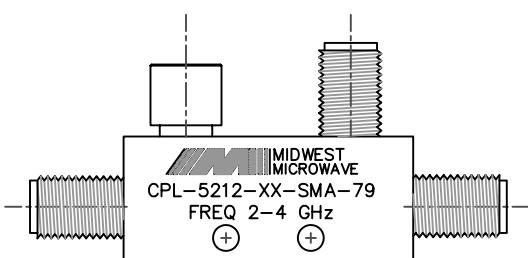
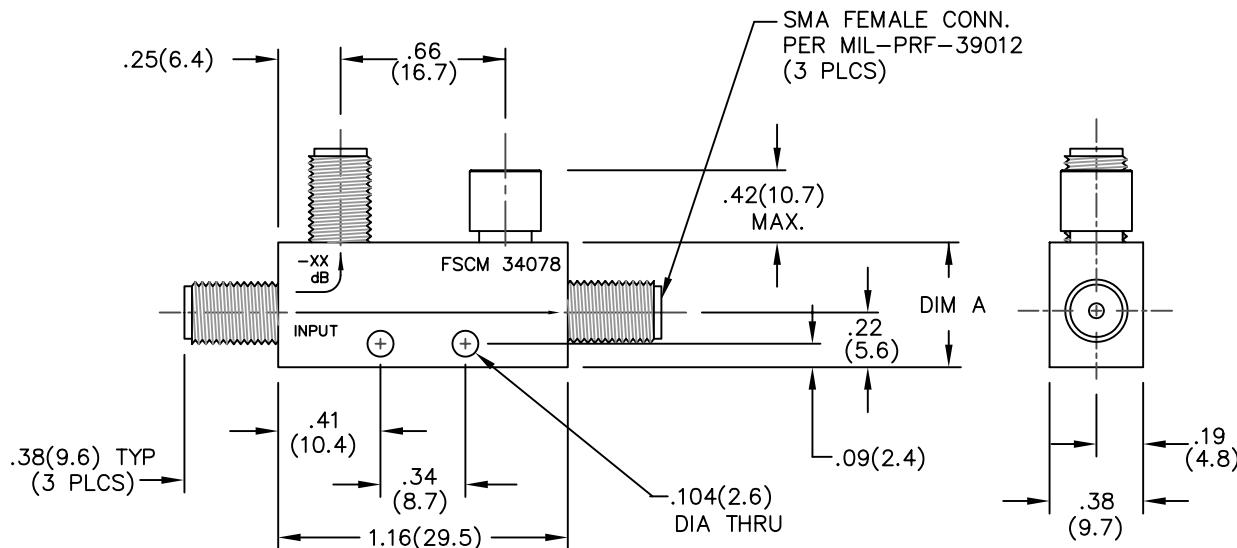
1.5 INSERTION LOSS (EXC. COUPLED POWER):
0.20dB MAX.

1.6 DIRECTIVITY: 22dB MIN

1.7 POWER: SEE TABLE

1.8 RF IMPEDANCE: 50 OHMS

2.0 FINISHING:

2.1 GREY OVER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400 AND MIL-E-16400V.2.2 MARK UNIT AS SHOWN.
REF: SLK-09341-82-[08 THRU 11]3.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

CPL-5212-30-SMA-79	30dB	± 0.75 dB	50	50	4,000	0.55	0.64 (18.2)
CPL-5212-20-SMA-79	20dB	± 0.75 dB	50	50	4,000	0.50	0.64 (18.2)
CPL-5212-10-SMA-79	10dB	± 0.75 dB	50	10	4,000	0.50	0.64 (18.2)
CPL-5212-06-SMA-79	6dB	± 0.60 dB	50	4	4,000	0.50	0.64 (18.2)
CPL-5212-XX-SMA-79 MODEL NUMBER	$-\text{XX}$ ± 1.0 dB COUPLING	FREQ. SENSITIVITY	INPUT POWER	REF. POWER	PEAK WATTS	DIM A	Oz (GRAMS) WEIGHT

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
AND TOLERANCES ARE:

3 PLACE DECIMALS $\pm .005$

2 PLACE DECIMALS $\pm .02$

FRACTIONS $\pm 1/64$

PARALLELITY: T.I.R. _____

FLATNESS: T.I.R. _____

CONCENTRICITY: T.I.R. _____

ANGLES AND PERPENDICULARITY: $\pm 1^\circ$

CAGE CODE
34078 MIDWEST MICROWAVE

EMERSON.
Network Power
Connectivity Solutions

DRAWN/DATE
A.BEATTY
11/15/91

ENG./DATE
P.GOODMAN
7/29/93

CHECKED/DATE
M.HOLLMAN
7/29/93

APPROVED/DATE

TITLE
DIRECTIONAL COUPLER
OUTLINE DRAWING

DRAWING NUMBER
CPL-5212-XX-SMA-79-01

REV.
B1

SCALE: 5=1 SHEET 1 of 1

REV.	DESCRIPTION	DATE
I	RELEASED	7/30/93
A	ECN 13091	11/12/93
B	ECN 17181	7/14/99
B1	ADDED TITLEBLOCK	4/14/05