



RECOMMENDED P.C.B. LAYOUT

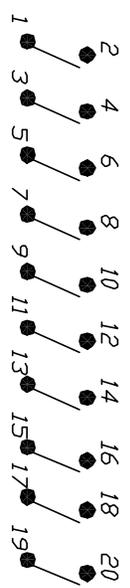

CIRCUIT 10 POSITION

NOTES:

1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT RATINGS: 25mA @24VDC. (Switch)
100mA @50VDC (Carry)
 5. CONTACT MATERIAL:
CONTACTS: BRASS w/Gold Plate
TERMINALS: BRASS w/Gold Plate
 6. INSULATION RESISTANCE:
100 Mega-Ohms min. @500VDC
 7. CONTACT RESISTANCE:
50 milli-Ohms typical @ 2-4VDC @100mA
 8. OPERATING TEMP: -40°C to +85°C
 9. PACKAGED: IN DISPENSING TUBES
- WITH ALL POLES IN THE "OFF" POSITION.



OFF
SEE NOTE 9

E-SWITCH®

KAR10 LA GT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12233	RELEASED FOR PRODUCTION	6/12/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
KAR10 LA GT	2:1	6/12/02	CJB	W827028	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED