
Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin		
Wire Size	4/0 AWG	CCU CCU	
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	PANDUII 4/0 STR CU LCC4/0-12H	
Wire Strip Length	1-5/8 in.		
Stud Size	1/2 in.	→ .63±.04 ← 1.75±.02 →	5 (2
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	Beveled	`
UL Temperature Rating	90° C		
C.S.A Certified Wire Connector	Yes	1.56	5±.04
Panduit Color Code on Barrel	PURPLE		/
Panduit Die Index No. on Barrel	P54		
Alternate Industry Die Index No. ()	(15)		/





on Barrel

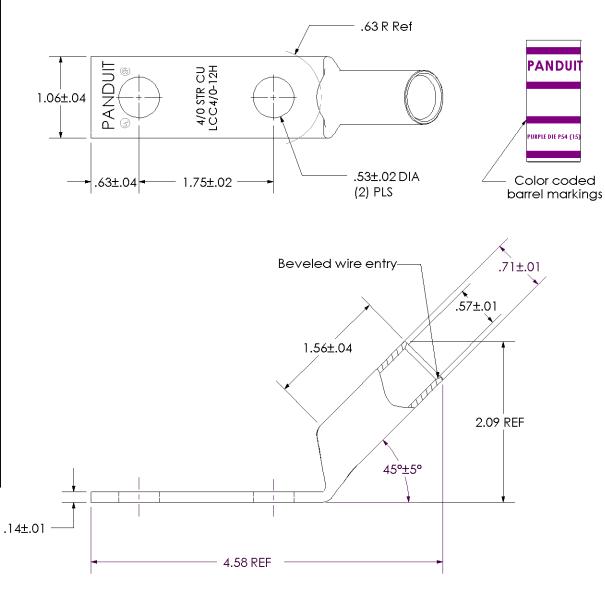

Wire Connector

REV	DATE	BY	снк	DESCRIPTION	ECN	sc
00	8/02	SAB	DRL	RELEASED	10334	



LCC4/0-12H-X Copper Lug - Two-Hole, Long Barrel, 45° Angle Tongue

CALE DRAWING NO / CAD FILE N/A

LCC4_0-12H-CUST