

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| Material | High Conductivity Seamless Copper Tube | | |
|--|--|--|--|
| Plating | Electro-Tin | | |
| Wire Size | 4/0 AWG Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric | | |
| Wire Type | | | |
| Wire Strip Length | 1-5/8 in. | | |
| Stud Size | 3/8 in. | | |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. | | |
| UL Temperature Rating | 90° C | | |
| C.S.A Certified Wire Connector | Yes | | |
| Panduit Color Code on Barrel | PURPLE | | |
| Panduit Die Index No. on Barrel | P54 | | |
| Alternate Industry Die Index No. () on Barrel | (15) | | |





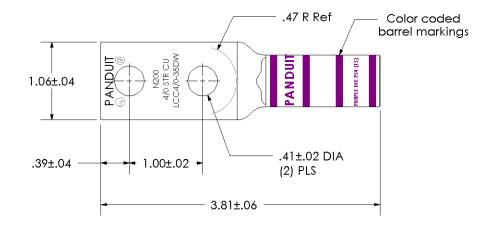

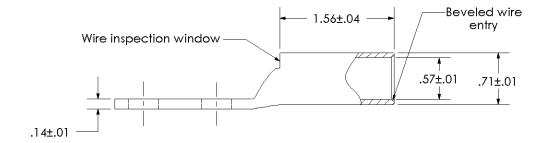

| | | | | | | CORP. TINLEY PARK, ILLINOIS |
|-----|------|-----|-----|-------------|-------|--|
| | | | | | | LCC4/0-38DW-X |
| 00 | 9/02 | SAB | DRL | RELEASED | 10340 | Copper Lug - Two-Hole, Long Barrel with Window |
| REV | DATE | BY | СНК | DESCRIPTION | ECN | SCALE DRAWING NO / CAD FILE LCC4_0-38DW-CUST |