

89 Series


Metal-Mite® Aluminum Housed Axial Terminal Wirewound, 1% Tolerance



The 89 Series is a high-performance axial type resistor. These molded-construction metal-housed resistors are available in higher power ratings than standard axial resistors and are better suited to withstanding vibration, shock and harsh environmental conditions.

The 89 Series Metal-Mite® resistors are aluminum housed to maintain high stability during operation and to permit secure mounting to chassis surfaces.

The metal housing also provides heat-sinking capabilities.

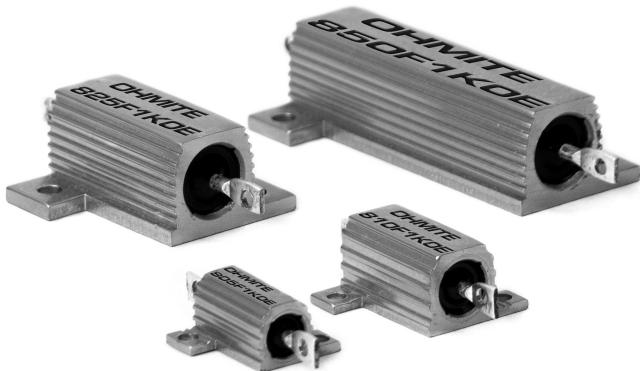

FEATURES

- High Stability: $\pm 0.5\% \Delta R$
- High power to size ratio
- Metal housing allows chassis mounting and provides heat sink capability

SERIES SPECIFICATIONS

Series	Wattage	Ohms	Voltage
805	5	0.10-25K	210
810	10	0.10-50K	320
825	25	0.010-75K	520
850	50	0.005-100K	1170

Non-Inductive versions available. Insert "N" before tolerance code.
Example: 850NF560

CHARACTERISTICS

Housing	Metal, anodized aluminum
Internal Coating	Silicone
Core	Ceramic
Terminals	Solder-coated axial
Derating	Linearly from 100% @ +25°C to 0% @ +275°C.
Tolerance	$\pm 1\%$ and $\pm 5\%$ (other tolerances available).
Power rating	Rating is based on chassis mounting area and temperature stability. Proper heat sink as follows: 5W and 10W units, 4" x 6" x 2" x .040" Aluminum chassis; 25W units, 5" x 7" x 2" x .040" Aluminum chassis; 50W units, 12" x 12" x .059" Aluminum panel.
Maximum ohmic values	See chart.
Overload	5 times rated wattage for 5 seconds.
Temperature coefficient	Under 1Ω: $\pm 90 \text{ ppm}/^\circ\text{C}$; 1 to 9.99Ω: $\pm 50 \text{ ppm}/^\circ\text{C}$; 10Ω and over: $\pm 20 \text{ ppm}/^\circ\text{C}$.
Dielectric withstand voltage	5W and 10W rating, 1000 VAC; 25 and 50W ratings, 2250 VAC.


(continued)

89 Series


Metal-Mite® Aluminum Housed Axial Terminal Wirewound, 1% Tolerance

DIMENSIONS

(in./mm)

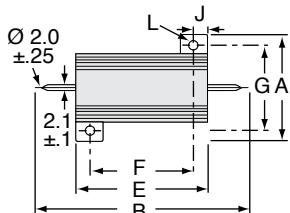

Dimensions have changed
as of August 2015



	A max.	B max.	C max.	D max.	E max.	F ±.3mm	G ±.3mm	H max.	J max.	K max.	L ±.25mm
805	0.65" / 16.5	1.18" / 30.0	0.35" / 8.8	0.33" / 8.5	0.63" / 15.9	0.44" / 11.3	0.49" / 12.4	0.18" / 4.5	0.09" / 2.4	0.07" / 1.8	0.09" / 2.4
810	0.83" / 21.0	1.44" / 36.5	0.43" / 11.0	0.44" / 11.2	0.78" / 19.9	0.56" / 14.3	0.63" / 15.9	0.22" / 5.5	0.11" / 2.8	0.07" / 1.8	0.09" / 2.4
825	1.10" / 28.0	2.01" / 51.0	0.58" / 14.8	0.56" / 14.2	1.07" / 27.3	0.72" / 18.3	0.78" / 19.8	0.30" / 7.7	0.20" / 5.2	0.10" / 2.6	0.13" / 3.2
850	1.10" / 28.0	2.85" / 72.5	0.58" / 14.8	0.56" / 14.2	1.93" / 49.1	1.56" / 39.7	0.84" / 21.4	0.33" / 8.4	0.20" / 5.2	0.10" / 2.6	0.13" / 3.2

ORDERING INFORMATION

Ohmic value	Wattage				Ohmic value	Wattage				Ohmic value	Wattage					
	Part No. Prefix > Suffix ▼	5 805F	10 810F	25 825F	50 850F	Part No. Prefix > Suffix ▼	5 805F	10 810F	25 825F	50 850F	Part No. Prefix > Suffix ▼	5 805F	10 810F	25 825F	50 850F	
0.005 — R005		✓	✓			20	—20R	✓	✓		1,500	—1K5	✓	⊕	⊕	✓
0.010 — R010		✓	✓			25	—25R	✓	✓	✓	2,000	—2K0	✓	✓	⊕	⊕
0.025 — R025		✓	✓			30	—30R	⊕	⊕		2,500	—2K5	✓	✓		
0.1 — R10		✓	✓			40	—40R	⊕	✓		3,000	—3K0	⊕	✓	✓	⊕
0.3 — R30		✓	⊕			50	—50R	✓	✓	✓	3,500	—3K5	⊕	⊕		
0.5 — R50		✓	⊕			75	—75R	✓	⊕	✓	4,000	—4K0	✓	✓		
0.7 — R70		⊕	⊕			100	—100	✓	✓	✓	4,500	—4K5	⊕	⊕		
1.0 — R10		✓	✓	✓	✓	150	—150	✓	✓	✓	5,000	—5K0	✓	✓	✓	✓
1.5 — R15		⊕	✓			200	—200	⊕	⊕	✓	6,000	—6K0	⊕	⊕	⊕	
2.0 — R20		⊕	✓	✓	✓	250	—250	✓	✓	✓	10,000	—10K	✓	⊕	✓	✓
3.0 — R30		✓	✓	✓	✓	300	—300	✓	⊕		15,000	—15K	✓	✓	⊕	⊕
4.0 — R40		⊕	✓			400	—400	⊕	⊕		20,000	—20K	⊕	⊕	⊕	
5.0 — R50		✓	✓	✓	✓	500	—500	✓	⊕	✓	25,000	—25K	✓	⊕	⊕	⊕
10.0 — R10R		✓	✓	✓	✓	750	—750	⊕	⊕	✓	50,000	—50K	⊕			
15.0 — R15R		✓	✓	✓	✓	1,000	—1K0	⊕	✓	✓	75,000	—75K	⊕			
										100,000	—100K				⊕	

As of September 2006,
the 89 Series is no longer
offered as Mil. Spec.

Non-Inductive Winding Optional (blank = std. winding) RoHS Compliant

805NF5R0E

Series	Tolerance	Ohms
805 = 5 Watt	F = 1%	R005 = 0.005Ω
810 = 10 watt	J = 5%	R10 = 0.1Ω
825 = 25 watt		1R0 = 1.0Ω
850 = 50 watt		250 = 250Ω
		1K0 = 1,000Ω
		1K5 = 1,500Ω
		25K = 25,000Ω

✓ = Standard values

⊕ = Non-standard values subject to minimum handling charge per item

Shaded values involve very fine resistance wire and should not be used in critical applications without burn-in and/or thermal cycling.