

**Type MIDA**  
**Fast Acting Automotive (MIDI®)\***  
**Limiter Fuse**  
**30mm Center to Center Bolt-On**



www.optifuse.com

(619) 593-5050

**Ampere:** 30A ~ 200A

**Voltage:** 80 VDC

**Material:** Housing – PEI (UL 94-V0)

**Connections:** Zinc-alloy, 2 x M5/M6 bolts, distance 30mm

30~150A: M5 bolts

200A: M6 bolts


**Recommended Tightening Torque:** 2.0-3.0 Nm

**Electrical Characteristics:**

Rating	110%	150%	200%	300%	500%
Opening Time	> 4 hr.	90 sec ~ 3600 sec	1 sec ~ 100 sec	300ms ~ 3sec	100ms ~ 1sec

Opening times based on ambient temperature of 23° C

**Product Dimensions: Inches [mm]**

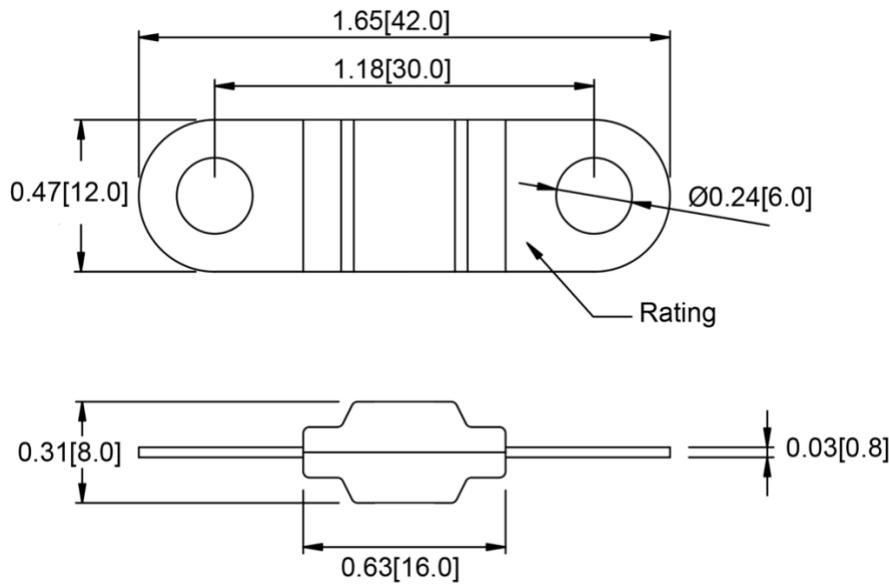

**Product Information**

Part Number	Ampere Rating	Stamp Color Code
MIDA-030	30	Orange
MIDA-040	40	Green
MIDA-050	50	Red
MIDA-060	60	Yellow
MIDA-070	70	Brown
MIDA-080	80	Clear
MIDA-100	100	Blue
MIDA-125	125	Pink
MIDA-150	150	Gray
MIDA-200	200	Violet

	<b>Warning:</b>
	<ul style="list-style-type: none"> <li>-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.</li> <li>-Limiter Fuses are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.</li> <li>-Avoid contact of Limiter Fuses with chemical solvent. Prolonged contact will damage the device performance.</li> </ul>

Note: All specifications subject to change without notice.

RevC 01/2022 - Page: 1/1  
 Code: G02

\* MIDI® is a registered trademark of Littelfuse.