

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT PART #	STUD SIZE	DIMENSIONS in. [mm]					CA9 SERIES CRIMP DIE	CA-800(EZ) SERIES CRIMP DIE
		L ± .03 [0,8]	W ± .01 [0,3]	C ± .015 [0,4]	M ± .03 [0,8]	H ± .01 [0,3]		
PV18-6LFB-3K	#6	.80 [20,3]	.27 [6,9]	.19 [4,8]	.60 [15,2]	.15 [3,8]	CD9-1A CD9-1N	CD-800-1
PV18-6LFWB-3K	#6	.83 [21,1]	.29 [7,4]	.19 [4,8]	.61 [15,5]	.14 [3,6]		
PV18-8LFB-3K	#8	.87 [22,1]	.29 [7,4]	.23 [5,8]	.65 [16,5]	.16 [4,1]		
PV18-10LFB-3K	#10	.87 [22,1]	.33 [8,3]	.23 [5,8]	.65 [16,5]	.19 [4,8]		
PV18-10LFNB-3K	#10	.87 [22,1]	.29 [7,4]	.23 [5,8]	.65 [16,5]	.19 [4,8]		

PRESS/APPLICATOR COMPATIBILITY CHART

PRESS	CP-871	CP-861
APPLICATOR	CA9 CA-800EZ	CA-800

NOTES:

- cULus LISTED FOR:
 - A. #22-18 AWG [0,5-1,0 mm²] SOLID OR STRANDED COPPER WIRE
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 - C. 600 V. MAX. VOLTAGE RATING (1000 V. MAX. IN SIGNS, FIXTURES & LUMINARIES)
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- MATERIAL:
 - A. STAMPING: .03" [0,8] THK COPPER, TIN PLATED
 - B. HOUSING: VINYL, RED
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- WIRE STRIP LENGTH: 1/4" ^{+1/32} [6,4 ^{+0,8}]

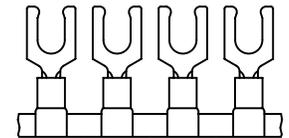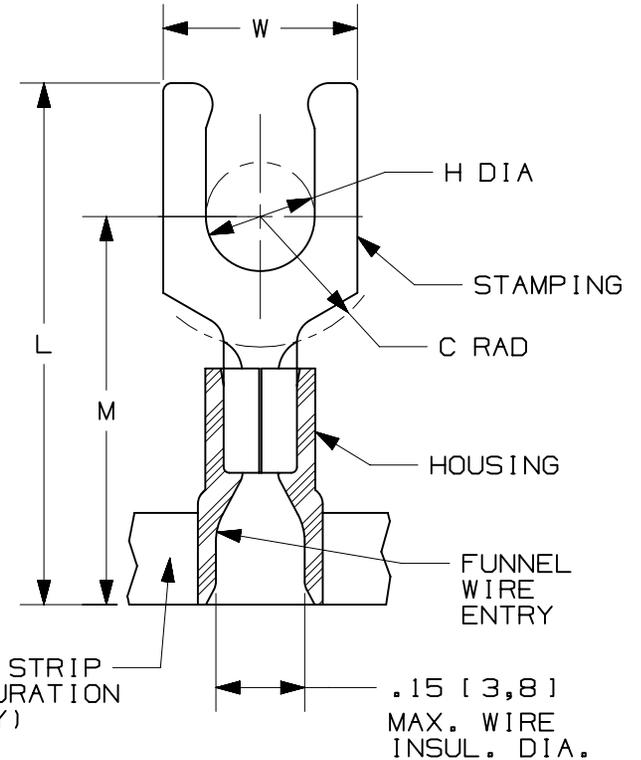

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
09	07/14	MBY	JHNU	RGB	REVISED NOTES, MOVED TOOLS TO TABLE, REVISED CERTIFICATION	N41072BA-A41072
08	09.28.12	JABO	LSM	VMB	REVISED NOTES. ADDED DIE INSERT CD9-1N. UPDATED TO CURRENT STANDARDS.	A41072

TITLE LOCKING FORK TERMINALS, 2 PC. VINYL INSULATED, FUNNEL ENTRY, #22-18, CONTINUOUS REEL		CUSTOMER DRAWING	
ITEM REVISION NAME N41072BA/09		PANDUIT	
DATASET FILE NAME N41072BA_DC/09A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
DRAWN BY DSM		DRAWING NUMBER: A41072	
DATE 1997	CHK FS	SCALE N.T.S.	SHEET 1 OF 1
THIRD ANGLE PROJECTION		SIZE A	

D101000A/12