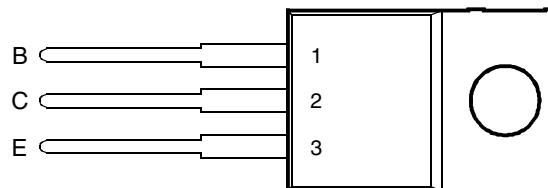


- Designed for Complementary Use with BDW93, BDW93A, BDW93B and BDW93C
- 80 W at 25°C Case Temperature
- 12 A Continuous Collector Current
- Minimum  $h_{FE}$  of 750 at 3V, 5 A

TO-220 PACKAGE  
(TOP VIEW)

**!** This series is obsolete and not recommended for new designs.

Pin 2 is in electrical contact with the mounting base.

MDTRACA

### absolute maximum ratings at 25°C case temperature (unless otherwise noted)

RATING	SYMBOL	VALUE	UNIT
Collector-base voltage ( $I_E = 0$ )	$V_{CBO}$	-45 -60 -80 -100	V
Collector-emitter voltage ( $I_B = 0$ )	$V_{CEO}$	-45 -60 -80 -100	V
Emitter-base voltage	$V_{EBO}$	-5	V
Continuous collector current	$I_C$	-12	A
Continuous base current	$I_B$	-0.3	A
Continuous device dissipation at (or below) 25°C case temperature (see Note 1)	$P_{tot}$	80	W
Continuous device dissipation at (or below) 25°C free air temperature (see Note 2)	$P_{tot}$	2	W
Operating junction temperature range	$T_j$	-65 to +150	°C
Storage temperature range	$T_{stg}$	-65 to +150	°C
Operating free-air temperature range	$T_A$	-65 to +150	°C

NOTES: 1. Derate linearly to 150°C case temperature at the rate of 0.64 W/°C.  
2. Derate linearly to 150°C free air temperature at the rate of 16 mW/°C.

### PRODUCT INFORMATION

**electrical characteristics at 25°C case temperature (unless otherwise noted)**

PARAMETER	TEST CONDITIONS			MIN	TYP	MAX	UNIT	
$V_{(BR)CEO}$ Collector-emitter breakdown voltage	$I_C = -100 \text{ mA}$	$I_B = 0$	(see Note 3)	BDW94 BDW94A BDW94B BDW94C	-45 -60 -80 -100			V
$I_{CEO}$ Collector-emitter cut-off current	$V_{CB} = -40 \text{ V}$	$I_B = 0$		BDW94		-1		
	$V_{CB} = -60 \text{ V}$	$I_B = 0$		BDW94A		-1		
	$V_{CB} = -80 \text{ V}$	$I_B = 0$		BDW94B		-1		
	$V_{CB} = -80 \text{ V}$	$I_B = 0$		BDW94C		-1		
$I_{CBO}$ Collector cut-off current	$V_{CB} = -45 \text{ V}$	$I_E = 0$		BDW94		-0.1		
	$V_{CB} = -60 \text{ V}$	$I_E = 0$		BDW94A		-0.1		
	$V_{CB} = -80 \text{ V}$	$I_E = 0$		BDW94B		-0.1		
	$V_{CB} = -100 \text{ V}$	$I_E = 0$		BDW94C		-0.1		
	$V_{CB} = -45 \text{ V}$	$I_E = 0$	$T_C = 150^\circ\text{C}$	BDW94		-5		
	$V_{CB} = -60 \text{ V}$	$I_E = 0$	$T_C = 150^\circ\text{C}$	BDW94A		-5		
	$V_{CB} = -80 \text{ V}$	$I_E = 0$	$T_C = 150^\circ\text{C}$	BDW94B		-5		
	$V_{CB} = -100 \text{ V}$	$I_E = 0$	$T_C = 150^\circ\text{C}$	BDW94C		-5		
$I_{EBO}$ Emitter cut-off current	$V_{EB} = -5 \text{ V}$	$I_C = 0$				-2		
$h_{FE}$ Forward current transfer ratio	$V_{CE} = -3 \text{ V}$	$I_C = -3 \text{ A}$		1000				
	$V_{CE} = -3 \text{ V}$	$I_C = -10 \text{ A}$	(see Notes 3 and 4)	100				
	$V_{CE} = -3 \text{ V}$	$I_C = -5 \text{ A}$		750		20000		
$V_{CE(\text{sat})}$ Collector-emitter saturation voltage	$I_B = -20 \text{ mA}$	$I_C = -5 \text{ A}$	(see Notes 3 and 4)			-2		
	$I_B = -100 \text{ mA}$	$I_C = -10 \text{ A}$				-3		
$V_{BE(\text{sat})}$ Base-emitter saturation voltage	$I_B = -20 \text{ mA}$	$I_C = -5 \text{ A}$	(see Notes 3 and 4)			-2.5		
	$I_B = -100 \text{ mA}$	$I_C = -10 \text{ A}$				-4		
$V_{EC}$ Parallel diode forward voltage	$I_E = -5 \text{ A}$	$I_B = 0$				-2		
	$I_E = -10 \text{ A}$	$I_B = 0$				-4		

NOTES: 3. These parameters must be measured using pulse techniques,  $t_p = 300 \mu\text{s}$ , duty cycle  $\leq 2\%$ .

4. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

**thermal characteristics**

PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$ Junction to case thermal resistance			1.56	°C/W
$R_{\theta JA}$ Junction to free air thermal resistance			62.5	°C/W

**PRODUCT INFORMATION**

SEPTEMBER 1993 - REVISED SEPTEMBER 2002  
 Specifications are subject to change without notice.

## TYPICAL CHARACTERISTICS

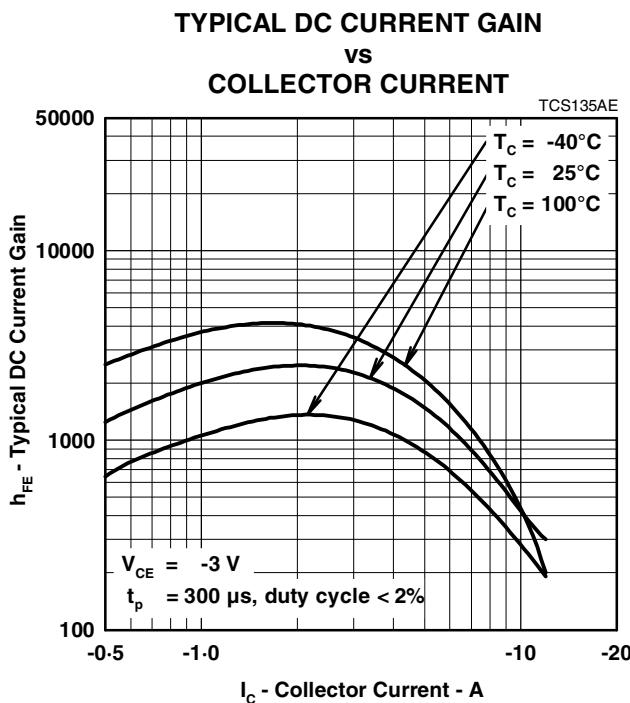


Figure 1.

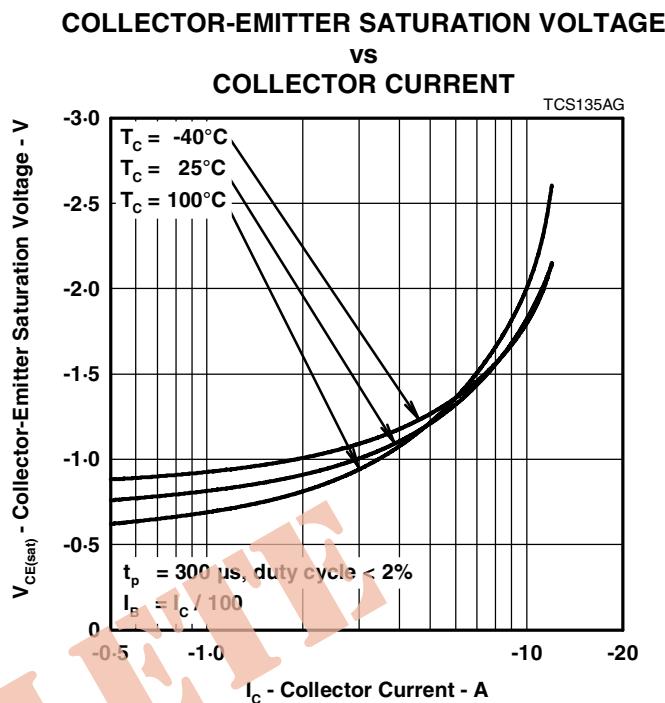


Figure 2.

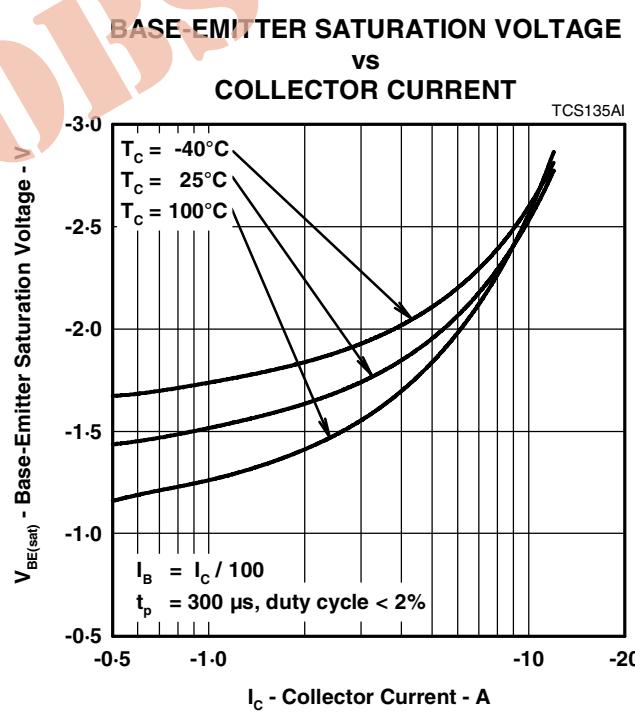



Figure 3.

**PRODUCT INFORMATION**

SEPTEMBER 1993 - REVISED SEPTEMBER 2002  
Specifications are subject to change without notice.

**THERMAL INFORMATION**

**MAXIMUM POWER DISSIPATION  
vs  
CASE TEMPERATURE**

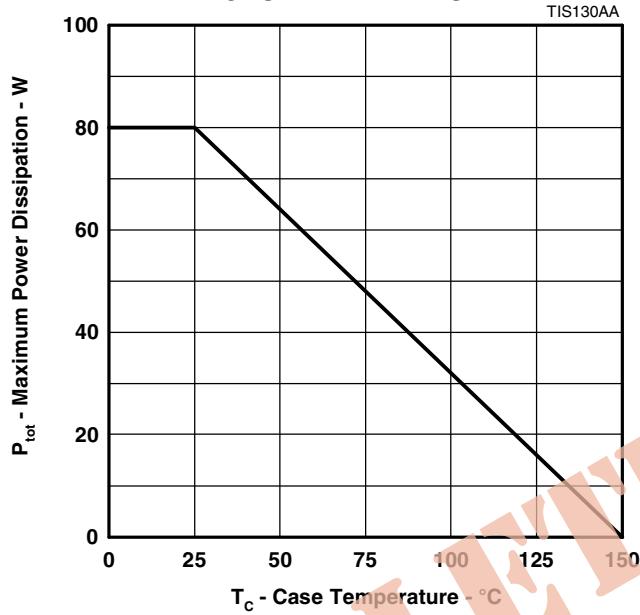

**Figure 4.**

**PRODUCT INFORMATION**