
| T | THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP. |
|---|--|
|---|--|

| Material | High Conductivity Seamless Copper Tube |
|---|--|
| Plating | Electro-Tin |
| Wire Size | 8 AWG |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric |
| Wire Strip Length | 5/8 in. |
| Stud Size | #10 |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90°C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | RED |
| Panduit Die Index No. on Barrel | P21 |
| Alternate Industry Die Index No. () on Barrel | N/A |





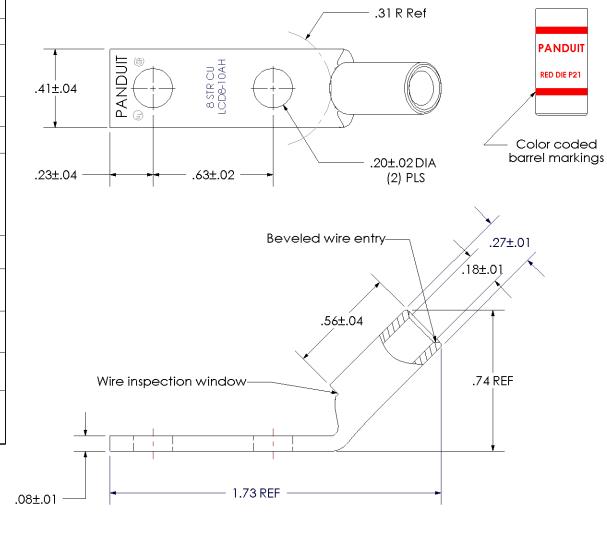

LISTED Wire Connector

CORP. TINLEY PARK, ILLINOIS

LCD8-10AH-L

Copper Lug - Two-Hole, Standard Barrel, 45° Angle Tongue

REV DATE BY CHK

DESCRIPTION

ECN SCALE N/A

PRAWING NO / CAD FILE LCD8-10AH-CUST