## PRODUCT DATASHEET

CS15223\_STRADA-IP-2X6-T2-C-90

#### **STRADA-IP-2X6-T2-C-90**

IESNA Type II (medium) beam with added house side backlight. Designed for tilted and long armatures. Variant with beam direction rotated 90°.

#### **SPECIFICATION:**

Dimensions 173.0 x 71.4 mm

Height 9.3 mm

Fastening screw

Ingress protection classes IP67

ROHS compliant yes 1



#### **MATERIALS:**

ComponentTypeMaterialColourFinishSTRADA-IP-2X6-T2-C-90Multi-lensPMMAclear2X6-SEAL25SealSiliconewhite

#### **ORDERING INFORMATION:**

 Component
 Qty in box
 MOQ
 MPQ
 Box weight (kg)


 CS15223\_STRADA-IP-2X6-T2-C-90
 Multi-lens
 120
 40
 40
 7.2

 » Box size: 476 x 273 x 247 mm

Last update: 13/02/2023 Subject to change without prior notice Published: 17/08/2018



# PRODUCT DATASHEET CS15223\_STRADA-IP-2X6-T2-C-90

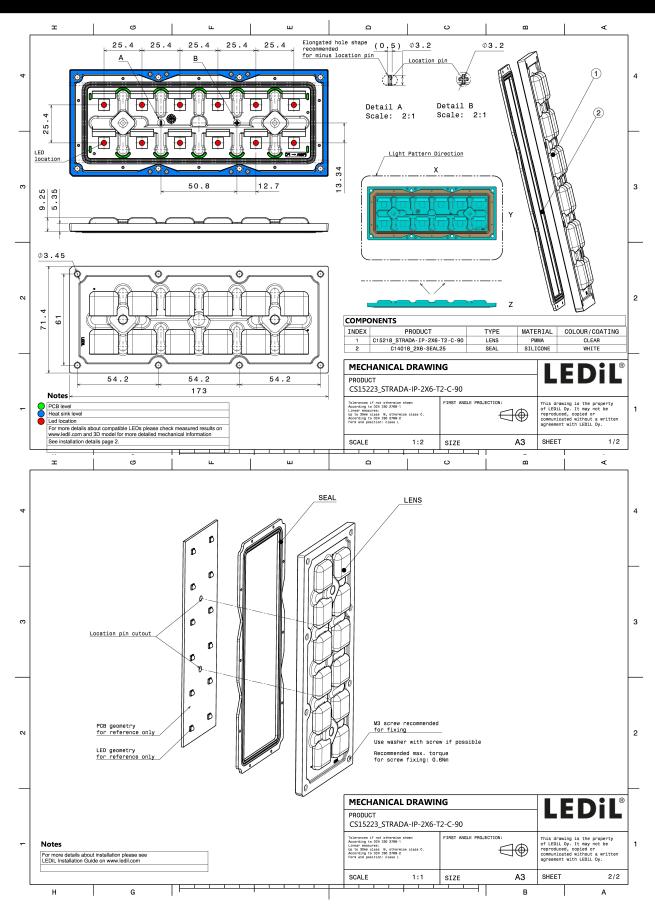

See also our general installation guide: www.ledil.com/installation\_guide


# PRODUCT DATASHEET CS15223\_STRADA-IP-2X6-T2-C-90

#### **OPTICAL RESULTS (MEASURED):**



LED QUICK FLUX 2x6 LED XG xxx G7+


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### COMET

LED QUICK FLUX 2x6 LED XT xxx G5


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### CREE - LED

LED XP-G2
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm

LEDs/each optic 1
Light colour White
Required components:




#### CREE - LED

Required components:

LED XP-L2

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White




#### **OPTICAL RESULTS (MEASURED):**

#### CREE \$\text{LED}

LED XT-E HE
FWHM / FWTM Asymmetric
Efficiency 94 %

Peak intensity 0.7 cd/lm LEDs/each optic 1

Light colour White Required components:




#### **WNICHIA**

LED NVSW219F FWHM / FWTM Asymmetric

Efficiency 94 %
Peak intensity 0.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:




#### **WNICHIA**

LED NVSW319B FWHM / FWTM Asymmetric

Efficiency 94 %
Peak intensity 0.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:




#### **WNICHIA**

LED NVSW519A FWHM / FWTM Asymmetric

Efficiency 96 %
Peak intensity 0.5 cd/lm

LEDs/each optic 1
Light colour White
Required components:



## PRODUCT DATASHEET CS15223\_STRADA-IP-2X6-T2-C-90


### **OPTICAL RESULTS (MEASURED):**

## **SAMSUNG**

HiLOM RH12 (LH351C)

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White


Required components:



## SAMSUNG

LED HiLOM RM12 ZP (LH502C)


FWHM / FWTM Asymmetric Efficiency 96 % Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour Required components:



#### CIOLUX

LED ROY-S26XPL2 (XP-L2)


FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White Required components:



### **SCIOLUX**

LED XLE-S22C4XTEHE (XT-E HE)

FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.7 cd/lm LEDs/each optic White Light colour Required components:



#### **OPTICAL RESULTS (MEASURED):**



LED XLE-S26XHP35 (XHP35 HD)


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

### SEOUL SEMICONDUCTOR

LED Z5M3
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1

Light colour White Required components:




#### TRIDONIC

Required components:

LED RLE 2x6 3000lm HP EXC2 OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White




#### **OPTICAL RESULTS (SIMULATED):**



LED XP-G2 HE
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White


Required components:



#### CREE \$\(\preceq\) LED


LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:



#### CREE = LED


LED XT-E
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### **MILEDS**

LED LUXEON 5050 Round LES


FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### **OPTICAL RESULTS (SIMULATED):**




LED LUXEON V2
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:




#### **WNICHIA**

LED NV4WB35AM
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### **WNICHIA**

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.5 cd/lm
LEDs/each optic 4
Light colour White




### **OSRAM**

Required components:

.ED PrevaLED Brick HP IP 2x6

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:



# PRODUCT DATASHEET CS15223\_STRADA-IP-2X6-T2-C-90


#### **OPTICAL RESULTS (SIMULATED):**

#### **OSRAM**

LED OSCONIQ P 3737 (2W version)

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:




#### **OSRAM**

Opto Semiconductor

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:




## **SAMSUNG**

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

White


Light colour
Required components:



## **SAMSUNG**

LED LH502C
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm

LEDs/each optic 1
Light colour White
Required components:



#### **OPTICAL RESULTS (SIMULATED):**

## **SAMSUNG**


LED LM301D FWHM / FWTM Asymmetric

Efficiency 93 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1
Light colour White

Required components:



SEOUL SEMICONDUCTOR

Light colour


LED Z5M4 FWHM / FWTM Asymr

FWHM / FWTM Asymmetric Efficiency 94 %

White

Peak intensity 0.5 cd/lm LEDs/each optic 1

Required components:



# PRODUCT DATASHEET

CS15223\_STRADA-IP-2X6-T2-C-90

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

## Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

## Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

11/11

www.ledil.com/ where\_to\_buy