


NPCAP™-PXT Series

- Super low ESR, impedance and high heat resistance have been obtained by using conductive polymer as electrolyte.
- High moisture resistance, Bias Humidity: 1,000 hours at 85°C, 85%RH
- Rated voltage range: 2.5 to 16V_{dc}, Capacitance range: 100 to 820μF
- Case size range : φ5×5.8L to φ6.3×7.7L
- Suitable for DC-DC converters, voltage regulators and decoupling applications used on computer motherboards etc.
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS2 Compliant
- Halogen Free



◆SPECIFICATIONS


| Items | Characteristics | | | | | |
|--|---|--|-----|-----|----|----|
| Category | | | | | | |
| Temperature Range | -55 to +105°C | | | | | |
| Rated Voltage Range | 2.5 to 16V _{dc} | | | | | |
| Capacitance Tolerance | ±20% (M) (at 20°C, 120Hz) | | | | | |
| Leakage Current *Note | Shall not exceed values shown in STANDARD RATINGS. (at 20°C after 2 minutes) | | | | | |
| Dissipation Factor (tan δ) | 0.12 max. (at 20°C, 120Hz) | | | | | |
| Low Temperature Characteristics (Max. Impedance Ratio) | Z(-25°C)/Z(+20°C)≤1.15 Z(-55°C)/Z(+20°C)≤1.25 (at 100kHz) | | | | | |
| Endurance | The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 15,000 hours at 105°C. | | | | | |
| | Appearance | No significant damage | | | | |
| | Capacitance change | ≤±20% of the initial value | | | | |
| | D.F. (tan δ) | ≤150% of the initial specified value | | | | |
| | ESR | ≤150% of the initial specified value | | | | |
| | Leakage current | ≤The initial specified value | | | | |
| Bias Humidity | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at 85°C 85% RH for 1,000 hours. | | | | | |
| | Appearance | No significant damage | | | | |
| | Capacitance change | ≤±30% of the initial value | | | | |
| | D.F. (tan δ) | ≤200% of the initial specified value | | | | |
| | ESR | ≤200% of the initial specified value | | | | |
| | Leakage current | ≤The initial specified value | | | | |
| Surge Voltage | The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor(R=1kΩ) and discharge for 5 minutes 30 seconds. | | | | | |
| | Rated voltage (V _{dc}) | 2.5 | 4.0 | 6.3 | 10 | 16 |
| | Surge voltage (V _{dc}) | 2.9 | 4.6 | 7.2 | 12 | 18 |
| | Appearance | No significant damage | | | | |
| | Capacitance change | ≤±20% of the initial value | | | | |
| | D.F. (tan δ) | ≤150% of the initial specified value | | | | |
| | ESR | ≤150% of the initial specified value | | | | |
| | Leakage current | ≤The initial specified value | | | | |
| Soldering Heat | The following specifications shall be satisfied when the solder temperature is reduced back to 20°C to measure dip resistance after soldering has been performed under the recommended soldering conditions. | | | | | |
| | Appearance | No significant damage | | | | |
| | Capacitance value | Within the specified tolerance range | | | | |
| | D.F. (tan δ) | ≤The initial specified value | | | | |
| | ESR | ≤The initial specified value | | | | |
| | Leakage current | ≤The initial specified value (Voltage treatment) | | | | |
| Failure Rate | 0.5% per 1,000 hours maximum (Confidence level 60% at 105°C) | | | | | |

*Note : If any doubt arises, measure the leakage current after the following voltage treatment.

Voltage treatment : DC rated voltage is applied to the capacitors for 120 minutes at 105°C.

◆DIMENSIONS [mm]

●Terminal Code : A

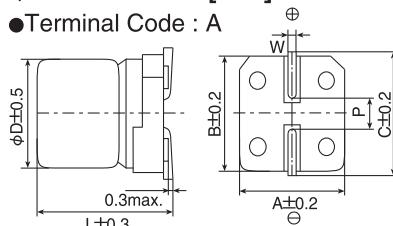

| Size Code | φD | L | A | B | C | W | P |
|-----------|-----|-----|-----|-----|-----|------------|-----|
| E61 | 5 | 5.8 | 5.3 | 5.3 | 5.9 | 0.5 to 0.8 | 1.4 |
| F61 | 6.3 | 5.8 | 6.6 | 6.6 | 7.2 | 0.5 to 0.8 | 1.9 |
| F80 | 6.3 | 7.7 | 6.6 | 6.6 | 7.2 | 0.5 to 0.8 | 1.9 |


◆MARKING

EX) 2.5V390μF



NPCAP™-PXT Series

◆PART NUMBERING SYSTEM

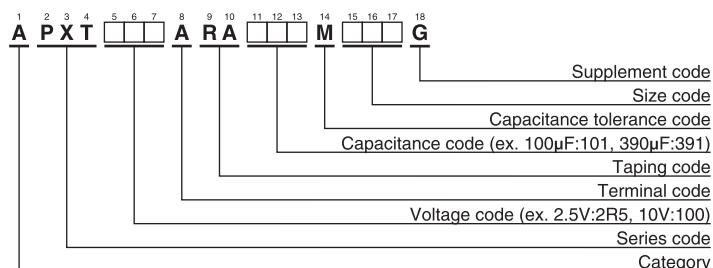

Please refer to "Product code guide (conductive polymer type)"

◆STANDARD RATINGS

| WV (V _{dc}) | Cap (μF) | Size code | Leakage current (μA max./after 2min.) | ESR (mΩ max./20°C, 100k to 300kHz) | Rated ripple current (mA rms/105°C, 100kHz) | Part No. |
|--------------------------|-------------|--------------|--|---------------------------------------|--|--------------------|
| 2.5 | 330 | E61 | 700 | 26 | 2,350 | APXT2R5ARA331ME61G |
| | 390 | E61 | 700 | 26 | 2,350 | APXT2R5ARA391ME61G |
| | 390 | F61 | 700 | 26 | 2,600 | APXT2R5ARA391MF61G |
| | 560 | F61 | 700 | 26 | 2,600 | APXT2R5ARA561MF61G |
| | 820 | F80 | 1,020 | 22 | 2,850 | APXT2R5ARA821MF80G |
| 4 | 270 | E61 | 700 | 26 | 2,350 | APXT4R0ARA271ME61G |
| | 330 | F61 | 700 | 26 | 2,600 | APXT4R0ARA331MF61G |
| | 390 | F61 | 780 | 26 | 2,600 | APXT4R0ARA391MF61G |
| | 680 | F80 | 1,360 | 22 | 2,850 | APXT4R0ARA681MF80G |
| 6.3 | 150 | E61 | 700 | 26 | 2,350 | APXT6R3ARA151ME61G |
| | 220 | E61 | 700 | 26 | 2,350 | APXT6R3ARA221ME61G |
| | 220 | F61 | 700 | 26 | 2,600 | APXT6R3ARA221MF61G |
| | 330 | F61 | 1,030 | 26 | 2,600 | APXT6R3ARA331MF61G |
| | 560 | F80 | 1,760 | 22 | 2,850 | APXT6R3ARA561MF80G |
| 10 | 120 | E61 | 700 | 45 | 2,000 | APXT100ARA121ME61G |
| | 220 | F61 | 1,100 | 40 | 2,200 | APXT100ARA221MF61G |
| | 390 | F80 | 1,950 | 22 | 2,850 | APXT100ARA391MF80G |
| 16 | 100 | E61 | 800 | 45 | 2,000 | APXT160ARA101ME61G |
| | 180 | F61 | 1,440 | 40 | 2,200 | APXT160ARA181MF61G |
| | 270 | F80 | 2,160 | 22 | 2,850 | APXT160ARA271MF80G |

◆RATED RIPPLE CURRENT MULTIPLIERS

◎Frequency Multipliers

| Frequency(Hz) | 120 | 1k | 10k | 50k | 100k to 500k |
|---------------|------|------|------|------|--------------|
| SMD type | 0.05 | 0.30 | 0.55 | 0.70 | 1.00 |