

**CXDM3069N**  
**SURFACE MOUNT**  
**N-CHANNEL**  
**ENHANCEMENT-MODE**  
**SILICON MOSFET**



**SOT-89 CASE**



[www.centralsemi.com](http://www.centralsemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CXDM3069N is a high current N-channel enhancement-mode silicon MOSFET, designed for high speed pulsed amplifier and driver applications. This MOSFET offers high current, low  $r_{DS(ON)}$ , low threshold voltage, and low leakage current.

**MARKING: FULL PART NUMBER**

**APPLICATIONS:**

- Load/Power switches
- Power supply converter circuits
- Battery powered portable equipment

**MAXIMUM RATINGS: ( $T_A=25^\circ C$ )**

Drain-Source Voltage	$V_{DS}$	30	V
Gate-Source Voltage	$V_{GS}$	12	V
Continuous Drain Current (Steady State)	$I_D$	6.9	A
Maximum Pulsed Drain Current, $t_p=10\mu s$	$I_{DM}$	40	A
Power Dissipation	$P_D$	1.2	W
Operating and Storage Junction Temperature	$T_J, T_{stg}$	-55 to +150	$^\circ C$
Thermal Resistance	$\Theta_{JA}$	104	$^\circ C/W$

**FEATURES:**

- Low  $r_{DS(ON)}$  (50m $\Omega$  MAX @  $V_{GS}=2.5V$ )
- High current ( $I_D=6.9A$ )
- Logic level compatibility

SYMBOL		UNITS
$V_{DS}$	30	V
$V_{GS}$	12	V
$I_D$	6.9	A
$I_{DM}$	40	A
$P_D$	1.2	W
$T_J, T_{stg}$	-55 to +150	$^\circ C$
$\Theta_{JA}$	104	$^\circ C/W$

**ELECTRICAL CHARACTERISTICS: ( $T_A=25^\circ C$  unless otherwise noted)**

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$I_{GSSF}, I_{GSSR}$	$V_{GS}=12V, V_{DS}=0$			100	nA
$I_{DSS}$	$V_{DS}=24V, V_{GS}=0$			1.0	$\mu A$
$BV_{DSS}$	$V_{GS}=0, I_D=250\mu A$	30			V
$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	0.7	0.9	1.4	V
$r_{DS(ON)}$	$V_{GS}=10V, I_D=7.0A$		25	30	$m\Omega$
$r_{DS(ON)}$	$V_{GS}=4.5V, I_D=6.0A$		28	35	$m\Omega$
$r_{DS(ON)}$	$V_{GS}=2.5V, I_D=4.0A$		38	50	$m\Omega$
$Q_{g(tot)}$	$V_{DS}=15V, V_{GS}=10V, I_D=5.4A$		11		nC
$Q_{gs}$	$V_{DS}=15V, V_{GS}=10V, I_D=5.4A$		1.0		nC
$Q_{gd}$	$V_{DS}=15V, V_{GS}=10V, I_D=5.4A$		1.2		nC
$C_{rss}$	$V_{DS}=15V, V_{GS}=0, f=1.0MHz$		47		pF
$C_{iss}$	$V_{DS}=15V, V_{GS}=0, f=1.0MHz$		580		pF
$C_{oss}$	$V_{DS}=15V, V_{GS}=0, f=1.0MHz$		42		pF
$t_{on}$	$V_{DD}=15V, I_D=1.0A, R_G=15\Omega$		20		ns
$t_{off}$	$V_{DD}=15V, I_D=1.0A, R_G=15\Omega$		28		ns


R1 (10-August 2012)

CXDM3069N


SURFACE MOUNT  
N-CHANNEL  
ENHANCEMENT-MODE  
SILICON MOSFET



SOT-89 CASE - MECHANICAL OUTLINE

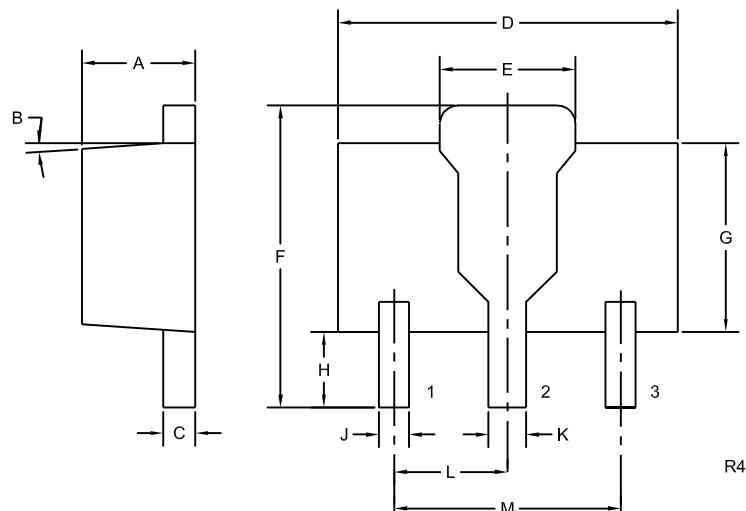

PIN CONFIGURATION



(Top View)  
Tab is common to pin 2

LEAD CODE:

- 1) Gate
- 2) Drain
- 3) Source

MARKING: FULL PART NUMBER

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.055	0.067	1.40	1.70
B	4°		4°	
C	0.014	0.018	0.35	0.46
D	0.173	0.185	4.40	4.70
E	0.064	0.074	1.62	1.87
F	0.146	0.177	3.70	4.50
G	0.090	0.106	2.29	2.70
H	0.028	0.051	0.70	1.30
J	0.014	0.019	0.36	0.48
K	0.017	0.023	0.44	0.58
L	0.059		1.50	
M	0.118		3.00	

SOT-89 (REV: R4)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.

145 Adams Avenue

Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110

Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

[www.centralsemi.com](http://www.centralsemi.com)

#### Worldwide Field Representatives:

[www.centralsemi.com/wwreps](http://www.centralsemi.com/wwreps)

#### Worldwide Distributors:

[www.centralsemi.com/wwdistributors](http://www.centralsemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centralsemi.com/terms](http://www.centralsemi.com/terms)