



### 900-928 MHz HORIZONTALLY POLARIZED OMNIDIRECTIONAL ANTENNA

The NLOS series horizontally polarized omnidirectional antenna systems offered by Laird Technologies are constructed of a heavy duty aluminum extrusion and then powder coat painted for extremely long service life. The super heavy duty mounting system will insure a stable installation in high wind conditions. The antennas are horizontally polarized so that interference can be minimized in the wireless system.

#### FEATURES

- 900 MHz omnidirectional antenna
- 9 dBi gain
- Heavy duty aluminum extrusion with powder coat paint
- Type N female integrated connector standard


#### MARKETS

- 900 MHz ISM band applications
- WISP base station equipment
- Non line-of-sight applications
- Point-to-multipoint systems
- WiMAX

PARAMETER	
Frequency range	900 - 928 MHz
VSWR	1.5:1
Impedance	50 ohm
Input power	100 W
Pole diameter (OD)	1.5 - 3 in (38-76mm)
Gain	9 dBi
Horizontal beamwidth	360°
Vertical beamwidth	18°
Cross polarization rej	-22 dB
Operating temperature	-45 to +70°C
Weight	22 lbs (10 kg)
Dimensions (L x W x H)	62 x 8 x 2 in (1575 x 203 x 51 mm)

#### ANTENNA PATTERNS

900 MHz DS Slot  
928 MHz

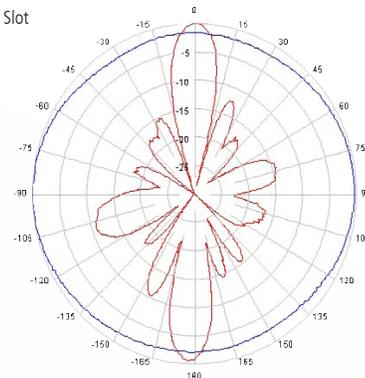

#### WIND LOADING

MODEL	SQ. IN	100 MPH	125 MPH
ODH9-9	496	124 lb	194 lb

#### SYSTEM ORDERING

ODH9-9 9 dBi 900 MHz horizontally polarized omnidirectional antenna



ANT-DS-ODH9 0611

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.

global solutions: local support™

Americas: +1.847.839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12  
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022  
IAS-AsiaSales@lairdtech.com

www.lairdtech.com