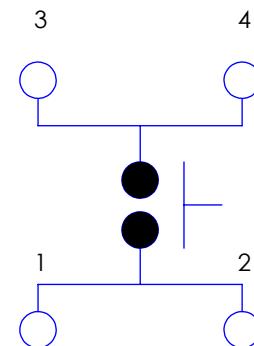
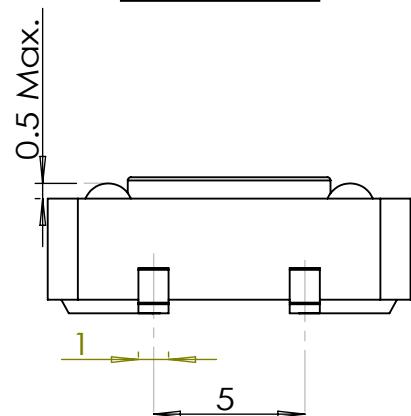
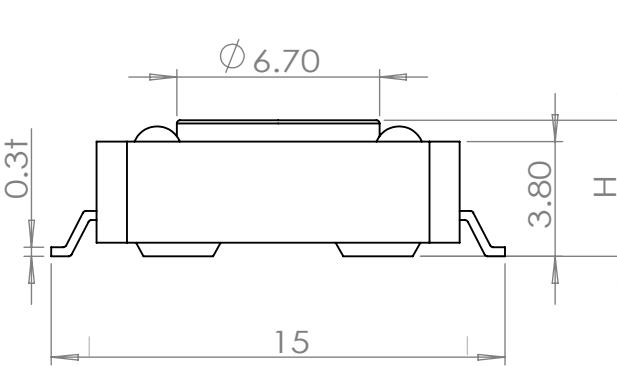


P.C.B. LAYOUT

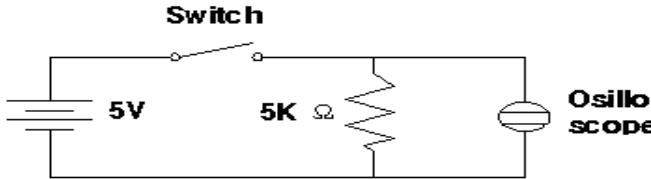


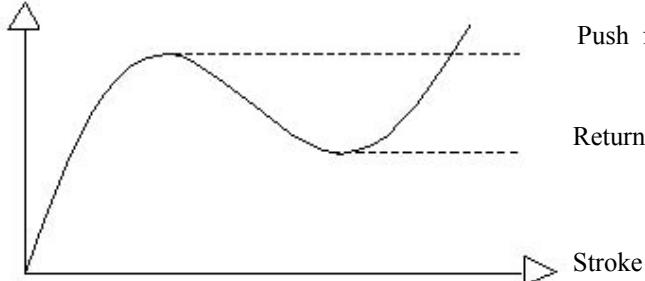
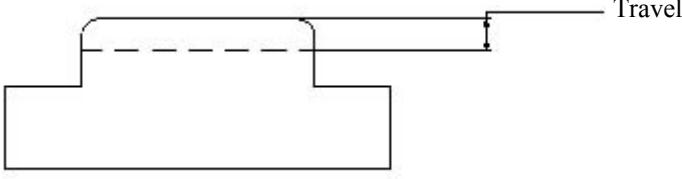
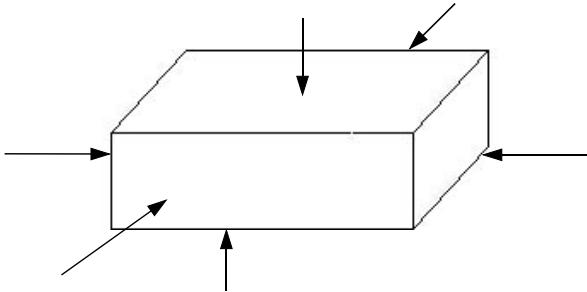
CIRCUIT DIAGRAM

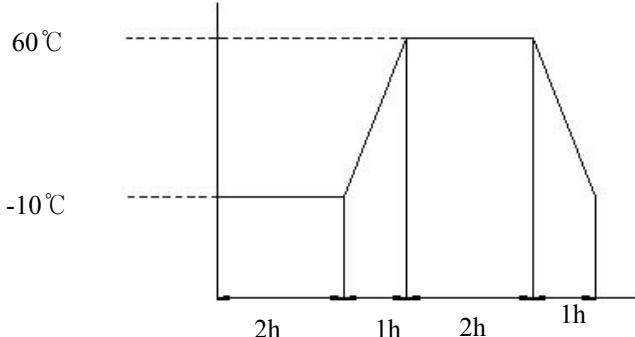
		TITLE JST 1103S Series		DWG. NO.
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO JAESANG ELECTRONICS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				
Type	H(mm)			
1103S	4.3			
1103SB	7.5			
1103SFH	8.5			
1103SF	9.5			
1103SD	12.0			
1103SA	12.0			
1103ST	7.3			
DATE	10/1/2018	MODEL	JST1103S_Series	A4
SCALE: 4:1	SHEET 1 of 1			

JAESANG
electronics co.,ltd

Tact Switch Specialized Manufacturing Company
www.jsswitch.co.kr

TITLE		PRODUCT SPECIFICATIONS														
MODEL No.	TACT SWITCHES (1103S)						PAGE									
1/4																
1. General																
1.1 Switch rating	DC 12V, 50mA															
1.2 Operating temperature range	-20°C ~ 70°C															
1.3 Preservative temperature range	-40°C ~ 80°C															
1.4 Apperance and dimensions	See outside drawing page															
1.5 Standard conditions	Unless otherwise specified, the test and measurements shall be carried out as follows: Ambient temperature : 5~35°C Relative humidity : 45~85% Air pressure : 86~106kPa (860~1060mbar) However, if doubt arises on the decision based on the measured values under the above-mentioned conditions, the following conditions shall be employed. Ambient temperature : 20±2°C Relative humidity : 60±5%RH Air pressure : 86~106kPa (860~1060mbar)															
2. Performance																
2.1 Electrical characteristics																
	Items		Test conditions					Criteria								
2.1.1	Contact resistance		Applying a static load twice the actuating force to the center of the stem, measurements shall be made with a 1kHz small-current contact resistance meter.					100mΩ MAX								
2.1.2	Insulation resistance		Measurements shall be made following application of DC 100V potential across terminals and frame for one minute.					100MΩ MIN								
2.1.3	Dielectric withstandin voltage		AC 250V (50Hz or 60Hz) shall be applied across terminals and frame for one minute.					There shall be no break-down								
2.1.4	Bounce		Lightly striking the center of the stem at a rate encountered in normal use (3 to 4 operations per sec.) bounce shall be tested at 'ON' and 'OFF'													
																
							APPD.	CHKD.								
								DSGD.								
																
																
PAGE	MARK	REVISION	DATE	APPD	CHKD	DSGD										

TITLE		PRODUCT SPECIFICATIONS	
MODEL No.		TACT SWITCHES (1103S)	
2.2. Mechanical characteristics			
Items	Test conditions	Criteria	
2.2.1 Operating force	<p>Push by recommended operating condition</p> 	Push force Return force	Refer to individual product drawing.
2.2.2 Travel	<p>Push by recommended operating condition</p> $F = (\text{Operation force}) \times 2$ 	0.25mm	
2.2.3 Stop strength	A static load of 3kgf shall be applied in the direction of stem operation for a period of 60 seconds.	No damage (Electrical and mechanical)	
2.2.5 Vibration test	<ul style="list-style-type: none"> (1) Amplitude : 1.5mm (2) Sweep rate : 10-55-10Hz for 1 minute. (3) Sweep method : Logarithmic frequency sweep rate. (4) Vibration direction : X.Y.Z (3 directions) (5) Time : Each direction 2 hours (Total 6 hours) 	No 2.1 and 2.2.1 to 2.2.2 shall be satisfied.	
2.2.6 Impact shock test	<ul style="list-style-type: none"> (1) Acceleration : 80G (2) Cycle of test : 3 cycles each in 6 directions for a total 18 cycles 	No 2.1 and 2.2.1 to 2.2.2 shall be satisfied.	
2.2.7 Soldering heat test	<p>Soldering area : $t/2$ of P.W.B thickness (P.W.B : $t = 1.6$)</p> <p>Soldering temperature : $260 \pm 5^\circ\text{C}$</p> <p>Soldering time : 5 ± 1 sec</p>	No damage (Electrical and mechanical)	

TITLE		PRODUCT SPECIFICATIONS	
MODEL No.		TACT SWITCHES (1103S)	PAGE 3/4
2.3 Climatic characteristics			
	Items	Test conditions	Criteria
2.3.1	Cold test	(1) Temperature : $-30 \pm 2^\circ\text{C}$ (2) Duration of test : 96 hours (3) Take off a drop water (4) Standard condition after test : 1 hour	Contact resistance : $200\text{m}\Omega$ max No 2.1.2 to 2.1.4 and 2.2.1 to 2.2.2 shall be satisfied.
2.3.2	Heat test	(1) Temperature : $80 \pm 2^\circ\text{C}$ (2) Duration of test : 96 hours (3) Standard condition after test : 1 hour	Contact resistance : $200\text{m}\Omega$ max No 2.1.2 to 2.1.4 and 2.2.1 to 2.2.2 shall be satisfied.
2.3.3	Temperature cycle	(1) Test cycles : 5 cycles (2) Standard conditions after test : 1 hour (3) 1 cycle 	Contact resistance : $200\text{m}\Omega$ max No 2.1.2 to 2.1.4 and 2.2.1 to 2.2.2 shall be satisfied.
2.3.4	Humidity test	(1) Temperature : $60 \pm 2^\circ\text{C}$ (2) Relative humidity : 90~95% (3) Duration of test : 96 hours (4) Take off a drop water (5) Standard conditions after test : 1 hour	Contact resistance : $200\text{m}\Omega$ max No 2.1.2 to 2.1.4 and 2.2.1 to 2.2.2 shall be satisfied.
2.3.5	Operating life test	(1) DC 5V, 5mA resistance load (2) Operation speed : 2~3 cycles/sec (3) Push force : maximum value of operation force (4) Cycle of operation : 100,000 cycles	Contact resistance : $200\text{m}\Omega$ max Bounce : 20m sec max Actuating force : $\pm 30\%$ initial force No 2.1.2 to 2.1.3 and 2.2.2 shall be satisfied.
2.3.6	Withstand H ₂ S	(1) Density : $3 \pm 1 \text{ ppm}$ (2) Temperature : $40 \pm 2^\circ\text{C}$ (3) Relative humidity : 90~95% (4) Duration of test : 24 hours (5) Standard conditions after test : 1 hour	Contact resistance : $200\text{m}\Omega$ max No 2.1.2 to 2.1.4 and 2.2.1 to 2.2.2 shall be satisfied.
2.3.7	Withstand SO ₂	(1) Density : $10 \pm 2 \text{ ppm}$ (2) Temperature : $40 \pm 2^\circ\text{C}$ (3) Relative humidity : 90~95% (4) Duration of test : 24 hours (5) Standard conditions after test : 1 hour	Contact resistance : $200\text{m}\Omega$ max No 2.1.2 to 2.1.4 and 2.2.1 to 2.2.2 shall be satisfied.

TITLE	PRODUCT SPECIFICATIONS	
MODEL No.	TACT SWITCHES (1103S)	PAGE 4/4
3. Soldering		
Reflow soldering conditions		
Preheat	: temperature on the copper foil surface should reach 180°C, 2 ± 0.3 minutes after the P.W.P entered into the soldering equipment.	
Soldering heat	: Temperature on the copper foil surface should reach the peak temperature of 240°C within 20 seconds after the P.W.B entered into soldering heat zone.	
<p style="text-align: center;">Temperature Profile</p>		