
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2005, Projects Unlimited Inc.

SPECIFICATIONS

REVISIONS						
LTR	DESCRIPTION	DATE	APPROVED			
-	RELEASED FROM ENGINEERING	3/23/06				

PARAMETERS	VALUES	UNITS
DIRECTIVITY	OMNI	-
SENSITIVITY	-42±3	dB
STANDARD OPERATING VOLTAGE	2.0	Vdc
MAX OPERATING VOLTAGE	10	Vdc
CURRENT CONSUMPTION (MAX)	0.5	mΑ
IMPEDANCE	2.2	k0hm
SIGNAL TO NOISE RATIO (MIN.)	60	dB
TERMINAL	SOLDERLESS	_
INTERNAL CAPACITOR	33	pF

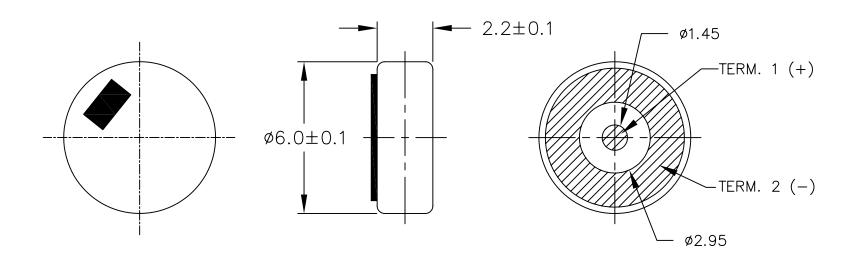

POM-2242S-C33-R.DWG

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
- 4. MICROPHONE CLOTH OVER FACE IS IP51 RATED.

	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3*. APPROVALS DATE		projects © unlimited Dayton , Ohio ELECTRET CONDENSER MICROPHONE		
	DRAWN 7G	3/06			
	CHECKED BR	3/06	SIZE DRAWING NO.		
	APPROVED EP	3/06	A POM-2242S-C33-R		
	DO NOT SCALE DRA	AWING	SCAL	ALE: N.T.S. SHEET 1 OF 1	