
UNCONTROLLED DOCUMENT

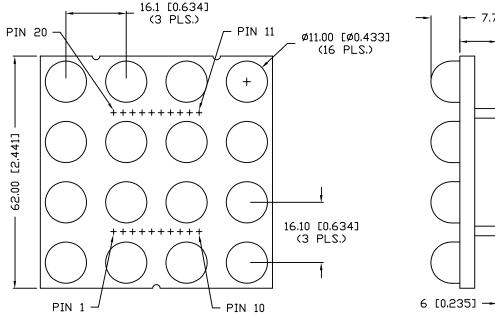

| 7.7 [0.303] 10.04±1.00 [0.395±0.039] |
|--|
| 31.40 [1.236] |
| ' |

PART NUMBER SSP-LXS2442UP16A

REV.


| REV. | E.C.N. NUMBER AND REVISION COMMENTS | DATE |
|------|-------------------------------------|----------|
| Α | E.C.N. #10582. | 1.19.00 |
| В | E.C.N. #10694. | 12.14.00 |

| ELECTRO-OPTICAL CHA | RACTERISTIC | S TA=25°C | l _f = | 20mA | |
|---------------------|-------------|-----------|------------------|----------|-----------------------|
| PARAMETER | MIN | TYP | MAX | UNITS | TEST COND |
| PEAK WAVELENGTH | | 525 | | nm | |
| FORWARD VOLTAGE | | 3.5 | 4.0 | V_{f} | |
| REVERSE VOLTAGE | 5.0 | | | V_r | I _r =100μΑ |
| AXIAL INTENSITY ** | | 5000 | | mcd | $I_f = 20 \text{mA}$ |
| VIEWING ANGLE | | 30 | | 2x theta | |
| EMITTED COLOR: | GREEN | | | | |
| EPOXY LENS FINISH: | WATER C | LEAR | | | |

^{**} INTENSITY PER DIE.

LIMITS OF SAFE OPERATION AT 25°C PER DIE

COMMON ANODE ROWS

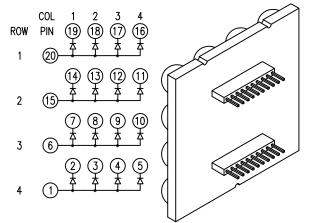

| PARAMETER | MAX | UNITS |
|--------------------------|--------------|------------|
| PEAK FORWARD CURRENT* | 100 | mA |
| STEADY CURRENT | 30 | mA |
| POWER DISSIPATION | 98 | mW |
| DERATE FROM 25°C | - 1.2 | mW/°C |
| OPERATING, STORAGE TEMP. | - 30 TO + 70 | . C |
| SOLDERING TEMP. | + 260 | . C |
| 2.0mm FROM BODY | | 3 SEC. MAX |

^{*} t<10µS

CAUTION: STATIC SENSITIVE DEVICE FOLLOW PROPER E.S.D. HANDLING PROCEDURES WHEN WORKING WITH THIS PART. ESD CLASSIFICATION: CLASS II BASED ON MIL-STD 883E

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), LEAD LENGTH=±0.75 (±0.003). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), LEAD LENGTH=±0.75 (±0.003). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.003). MIN

PART NUMBER

SSP-LXS2442UP16A

2.54 [0.100]

(9 PLS.)

2.44" SQUARE, 16 LED CLUSTER, 525nm ULTRA GREEN LEDS, WATER CLEAR LENS. COMMON ANODE ROWS.

62.00 [2.441] -

0.64 [0.025]

SQR. (20 PLS.)

REV.

В

22.86 [0.900]

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY: DATE:

9.21.99 PAGE: 1 OF 1 SCALE: N/A

CT