## SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283

CSA CERTIFIED: CSA 22.2, # 0,0.4,8

VDE APPROVED: EN 60939-2

## OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 20 AMP/40°C, 120/250 VAC

I THE EREGUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND: 0.16 mA@ 120V 60Hz 0.28 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ic. IN AN AMBIENT,  $T_0$ , HIGHER THAN 40°C, THE MAXIMUM DPERATING CURRENT,  $I_0$ , IS AS FOLLOWS:  $I_0 = I_0 - \sqrt{100 - I_0}$ 

100 - Tα  $I_0 = I_r - /$ 60

## RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES IC FOR 8 SECONDS

#### CATALOG # 20ERK1 # APPRVD. DATE PJD 08-031152 12DEC08

CUSTOMER DRAWING

# TEST SPECIFICATIONS:

INDUCTANCE: 4.55 mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0044 μF ±20% LINE TO LINE: 0.741 μF±20% DISCHARGE RESISTOR: 470K △

I/G AND I/L I.R.

6000M₁ (MIN.) **@** 100VDC, NO DISCHARGE RESISTOR:


20°C AND 50% RH

## RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

### FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

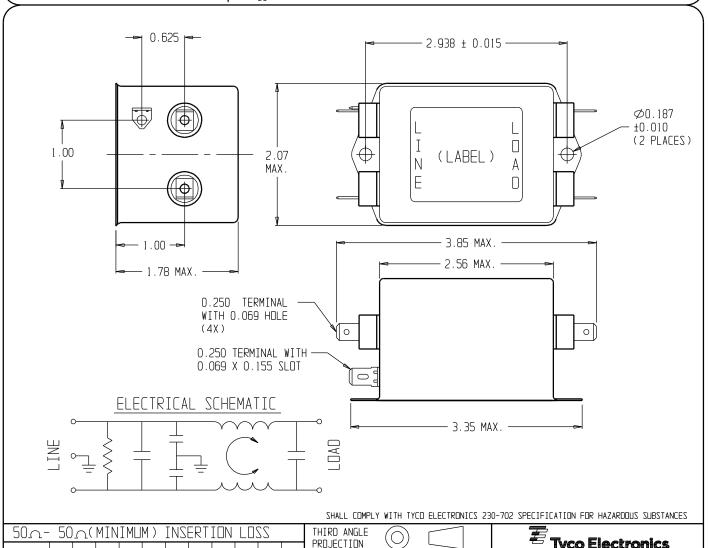

Tyco Electronics **ERECLIENCY** 05 . 10 . 15 . 50 2.0 5.0 30 CORCOM PRODUCTS, 620 S. BUTTERFIELD RD. MUNDELEIN IL 60060 1.0 10 20 UNLESS OTHERWISE SPECIFIED, MHz TOLERANCE TO BE ±.025 POWER LINE FILTER CDMMDNMATERIAL & FINISH: AS SUPPLIED 19 25 29 34 36 38 40 41 43 52 THATESTAL & FINITS. AS SEPTELED

THIS INFORMATION IS CONFIGENTIAL AND PROPRIETARY TO TYCO ELECTRONICS PART NO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES SCALE:

NTS DATE:

OARD AFFILIARS. IT MAY NOT BE DISCLOSED TO ANYONG DIHER THAN TYCO ELECTRONICS PRESUNEL, WITHOUT WRITTEN AUTHORIZATION PROMITYCO ELECTRONICS CORPORATION.

ORN. BY:

ORIG. PHANSYLVANIA USA

PJD dΒ TYCO ELECTRONICS PART NO. ATALOG NO DIFF 74 90 67 54 16 19 16 54 74 61 20ERK1 4 dΒ