## 10 Watt Light Bar on OptoTherm® Linear Heat Spreader

# **Electronics**

### **OPA729 Series**

#### Features:

- 10, 1 watt LEDs per strip, can be linked with other OPA729's
- Mono-color per strip (Blue, Green, Red, Yellow, White)
- Two component beam angle options (120° or 40°)
- Power connected to either end
- Universal connector (Tyco 2-292173-2 mates with 173977-2)
- RoHS Compliant



OPA729\_ (120° Beam Angle)



OPA729\_D (40° Beam Angle)



#### Description:

The **OPA729** Series are designed for areas where lighting intensity and reliability are essential. The light beam angles of 40° and 120° are ideal for illuminating small and medium size areas while requiring minimal space. A High Performance Heat Spreader (HPHS) is used to ensure the best heat dissipation of any light assembly in the industry.

OptoTherm<sup>®</sup> is designed to be the optimum material for distribution of heat for high power devices.

For custom colors and design contact your OPTEK representative.

#### Electrical / Optical Characteristics: T<sub>A</sub>=25°C, I<sub>E</sub>=700mA

Part Number	Typical Forward Voltage (V)	Luminous Flux (lm)	Beam Angle	Color	Dominant Wavelength
OPA729Y	12.5	350	120°	Yellow	587 nm
OPA729B	18.0	90		Blue	470 nm
OPA729G	18.0	480		Green	530 nm
OPA729R	12.5	260		Red	625 nm
OPA729W	18.0	480		White	6,500°K
OPA729YD	12.5	350	40°	Yellow	587 nm
OPA729BD	18.0	90		Blue	470 nm
OPA729GD	18.0	480		Green	530 nm
OPA729RD	12.5	260		Red	625 nm
OPA729WD	18.0	480		White	6,500°K






DO NOT LOOK DIRECTLY AT LED WITH UNSHIELDED EYES OR DAMAGE TO RETINA MAY OCCUR.

## 10 Watt Light Bar on OptoTherm® Linear Heat Spreader



**OPA729 Series** 

#### **OPA729**\_

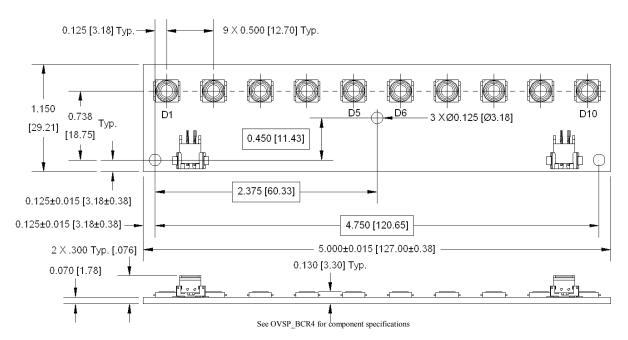

#### **OPA729\_D**

