Customer Information Sheet


DRAWING No.: M80-331 TO M80-332


IF IN DOUBT - ASK


NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

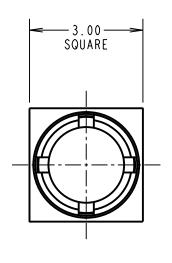

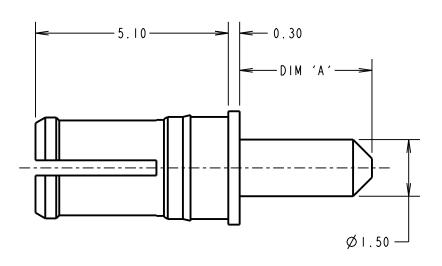

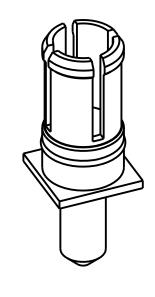

SPECIFICATIONS:

MATERIALS:

BODY = COPPER ALLOY

FINISH:

BODY = GOLD **ELECTRICAL:**

CONTACT RESISTANCE = $6m\Omega$ MAX

CURRENT RATING = 20A

MECHANICAL:

DURABILITY = 500 OPERATIONS INSERTION FORCE = 8N MAX

WITHDRAWAL FORCE = 0.5N MIN

ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +125°C

PART No.	DIM 'A'	
M80-331	3.50	
M80-332	5.00	

NOTES:

- I. RECOMMENDED PCB HOLE SIZE = ØI.65±0.05.
- 2. FOR ALL OTHER ELECTRICAL/ MECHANICAL REQUIREMENTS, SEE COMPONENT SPECIFICATION COOSXX (LATEST ISSUE).

MGP	16	24.08.21	30795
NAME	I\$\$.	DATE	CN/CO
APPROVED: MGP			
CHECKED: RTP			
DRAWN: W.J.BOURNE			
CUSTO	OMER I	REF.:	
ASSEN	MBLY I	ORG:	



www.harwin.com technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING. TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION

TOLERANCES X. = ±1mm $X.X = \pm 0.50 mm$ $X.XX = \pm 0.20$ mm $X.XXX = \pm 0.01$ mm

ANGLES = $\pm 5^{\circ}$ UNLESS STATED MATERIAL:

SFF ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

DATAMATE MIX-TEK TITLE: POWER CONTACT MALE VERTICAL PC-TAIL

DRAWING NUMBER:

M80-331 TO M80-332

SHT 0F₂