

CS18-01S100-05-1

Rev. 0-2021
RoHS3 & REACH
Surface Mount Speakers




Operating Characteristics

ELECTRICAL

Rated Power	1.0 W
Short Term Max Power	1.5 W
Impedance	8 Ω ± 15 % 2000 Hz; 1 W

ACOUSTIC: Baffle Board

f_o	1000 ± 20 Hz 1 W
Freq. Range	1000 to 20000 Hz
Rated SPL	97 ± 3 dB 1000, 1200, 1500, 2000 Hz; 1 W; 10 cm;
Distortion	Max 5 % 2000 Hz; 1 W

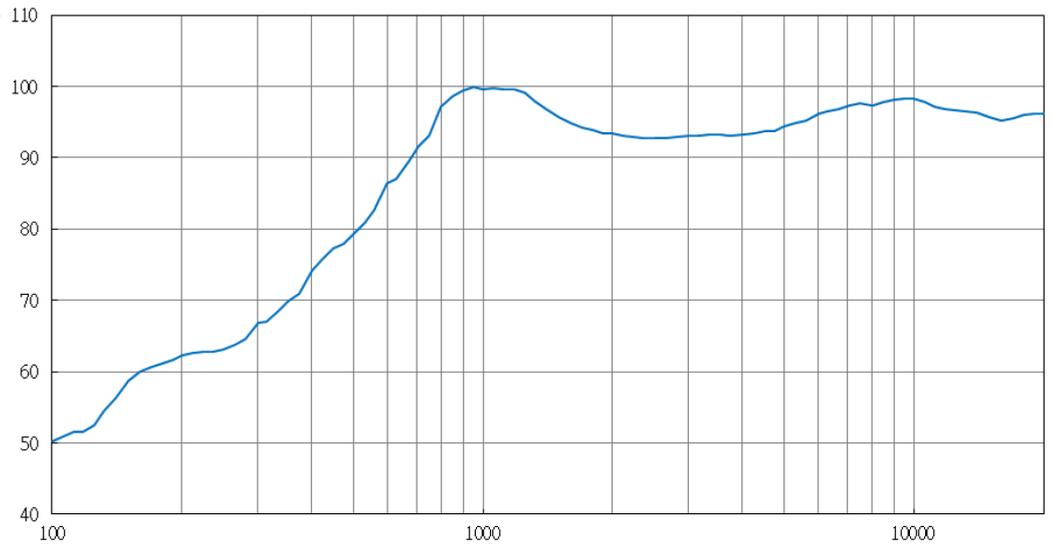

Physical Characteristics

MATERIALS


Housing	LCP
Cone	PI
Magnet	SmCo
Solder Pads	Tin Plated Copper

TEMPERATURE RANGES

Operating	-40 to +85 °C
Storage	-40 to +90 °C

Weight 3 g

Unless otherwise specified, tolerance: ±0.3(unit: mm)

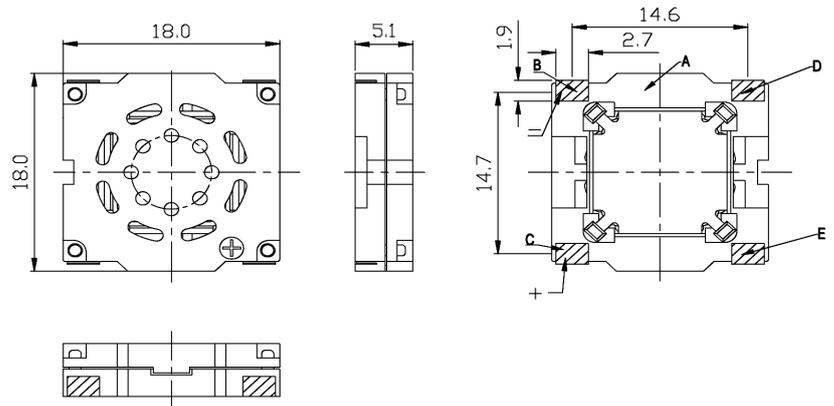

Coplanarity with respect to A as a standard
, B, C, D, E tolerance is 0~+0.1mm

All Measurements are mm unless noted otherwise.

Revision	Description	By	Date
0-2021	Original Specification	CT	2021-05-13

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.

©2021 Challenge Electronics, Inc. Pub. 20210513115222