Grayhill

SERIES 02

FEATURES

- Rapid, Easy Connections
 - Hex Nut for Adjusting Tension
 - Choices of Sizes and Styles



Termination Hardware







Miniature











DIMENSIONS In Inches (and millimeters)



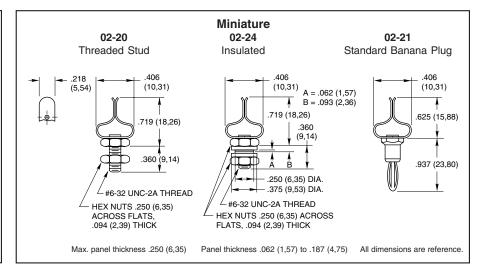

Standard Size Threadless 02-60 .312 (7,92)1.144 (29.06)TAPPED FOR #8-32 UNC-2A THREADED .576 SCREW TO (14,63) **ADJUST** TENSION SCREW NOT INCLUDED All dimensions are reference.

Standard Size 02-0 02-4 02-1 Threaded Stud Standard Banana Plug Insulated .312 .550 (13.97) -.550 (13.97) .550 (13.97) (7,92) A = .063(1,60).187 B = .094(2,39)(4,75) 1.125 (28,58) 1.250 (31,75) 1.250 (31,75) .312 (7,92).312 (7,92) .937 (23,80) .375 (9,53) DIA .500 (12,7) DIA. #8-32 UNC-2A THREAD -#8-32 UNC-2A THREAD HEX NUTS .344 (8,74) HEX NUTS .344 (8,74) ACROSS ACROSS FLATS FLATS, .125 (3,18) THICK .125 (3,18) THICK Max. panel thickness .250 (6,35) All dimensions are reference.

STANDARD OPTIONS

Standard Size Threaded Stud Clip can be made of Stainless Steel or Inconel X material. Not available through Distributors.

SPECIFICATIONS

Materials and Finishes

Studs: Nickel-plated steel except for 02-41 and 02-42 which are nickel-plated brass

Rivets and Nuts: Nickel-plated brass Spring Clips: Nickel-plated brass except for

02-41 and 02-42 which are nickel-plated

beryllium copper Insulators: Thermoset plastic

ORDERING INFORMATION

Order using part numbers shown in dimensions.

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

Termination