
NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 5 WATTS AVG. AT +40°C DERATED LINEARLY TO 0.5 WATTS AT +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 MAXIMUM VSWR: 1.05 + 0.01f(GHz)
- 2.0 MARKING: MARK UNIT AS SHOWN. (REF.: INK-01526-27-03)
- 3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.



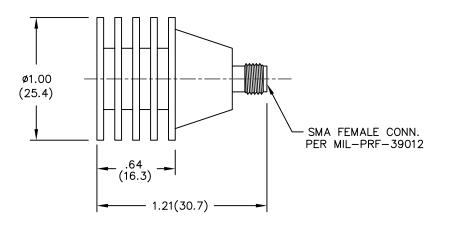

DWG. NO. WAS: 01974-01-00

10/26 10/26	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.	34078	1677	TITLE	MICRO		
EASED 6545 AW ON CA	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02		k Power ry Solutions	TERMINATION OUTLINE DRAWING			
	FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY: ±1°	DRAWN/DATE A.BEATTY 3/17/92 CHECKED/DATE	ENG/DATE G.KOZAK 3/25/92 APPROVED/DATE	TRM-2010- scale: 5=1	-FO-SMA-		REV. C1