


THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.


BOEING PART NO., SOURIAU CATALOG NO., CAGE NO., DATE CODE, AND PART NAME, INK STAMPED COLOR BLACK AS ILLUSTRATED. SEE TABLE 1-1

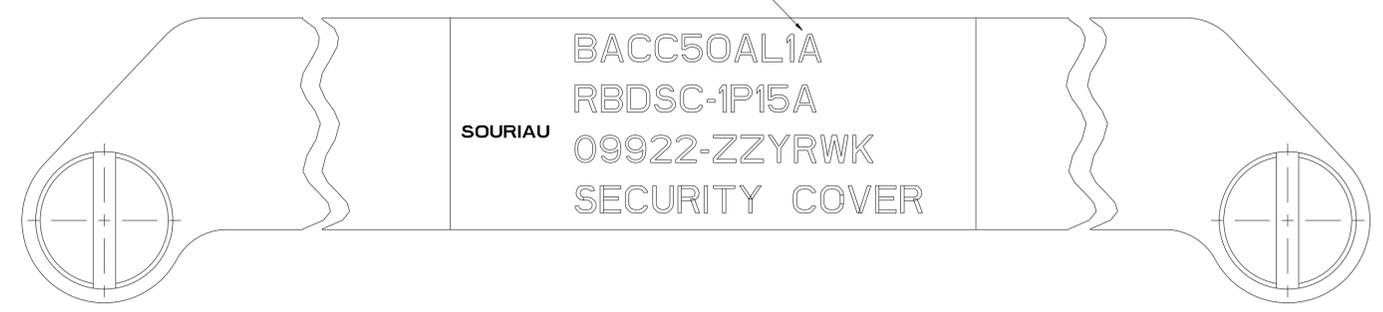

BACC50AL1A
RBDSC-1P15A
09922-ZZYRWK
SECURITY COVER

SOURIAU

SWITCH COMPARTMENT SECURITY COVER PLATE RBDSC-1P15A SHOWN (.024 [0.61] THICK STAINLESS STEEL) WITH MOUNTING SCREWS.

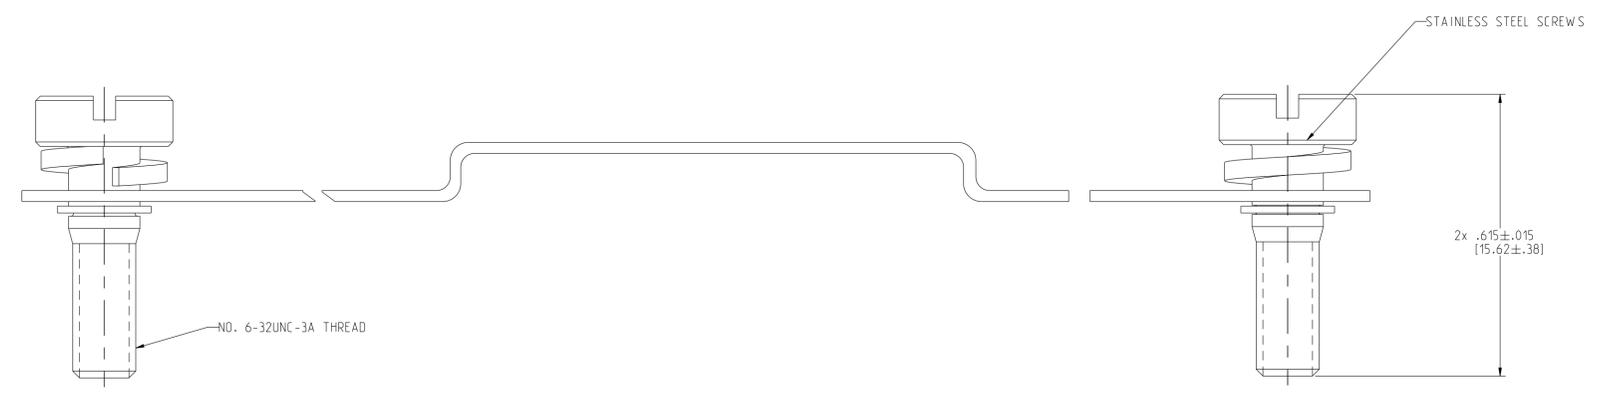


STAINLESS STEEL SCREWS

2x .615±.015 [15.62±.38]

NO. 6-32UNC-3A THREAD

PLATE SCREWS, AND RETAINING RINGS ASSEMBLED RBDSC-1P15A SHOWN

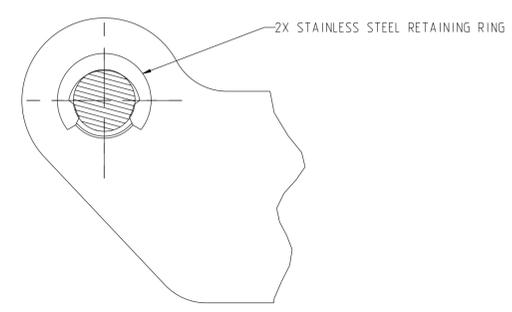


2X STAINLESS STEEL RETAINING RING

TABLE 1-1	
COVER	SCREW
RBDSC-1P15	X

A- WITH LOCK WASHERS (BACC50AL1A)
BASIC COVER WITH SCREWS (BACC50AL1)

- TO INSTALL SECURITY COVER PLATE:
1. FASTEN PROGRAM SWITCH MODULE IN PLACE USING (2) SECURITY COVER/MODULE MOUNTING STUDS AND (2) ELASTIC LOCK NUTS (PURCHASED SEPARATELY)
 2. THREAD SCREWS INTO UPPER END OF MOUNTING STUDS, TURN EQUALLY TO MAINTAIN SECURITY COVER PLATE LEVEL WITH SEALING PLUGS.
 3. TIGHTEN SCREWS EQUALLY TO BUTT COVER PLATE ON SEALING PLUGS. CONTINUE TO TIGHTEN UNTIL COVER PLATE BOTTOMS FIRMLY ON UPPER END OF MOUNTING STUD.
- TO ACCESS DIP SWITCHES:
1. LOOSEN ONE SCREW COUNTERCLOCKWISE 2 TURNS. REMOVE THE OTHER SCREW.
 2. SWING THE SECURITY COVER PLATE TO UNCOVER THE SEALING PLUGS. PULL PLUGS TO ACCESS SWITCHES.

- NOTES: UNLESS OTHERWISE SPECIFIED
1. PROGRAM SWITCH MODULE WITH SEALING PLUGS PURCHASED SEPARATELY SEE DRAWING BRSD95231 FOR DETAILS.
 2. SWITCH MOUNTING STUD PURCHASED SEPARATELY. SEE DRAWING SC95769 FOR DETAILS
 3. SECURITY COVER ASSEMBLIES ARE PACKAGED ONE ASSEMBLY PER BAG.
- FEATURES:
1. THE COVER PLATE APPLIES DOWNWARD PRESSURE ON THE SEALING PLUGS, HOLDING THEM IN THE SEALED POSITION.
 2. THE SECURITY COVER SYSTEM DOES NOT INCREASE THE OVERALL LENGTH, HEIGHT OR WIDTH, OF THE PROGRAM SWITCH MODULE.
 3. ALL COMPONENTS ARE SECURED WHILE SETTING SWITCHES. NO DROPPED OR MISPLACED PARTS.

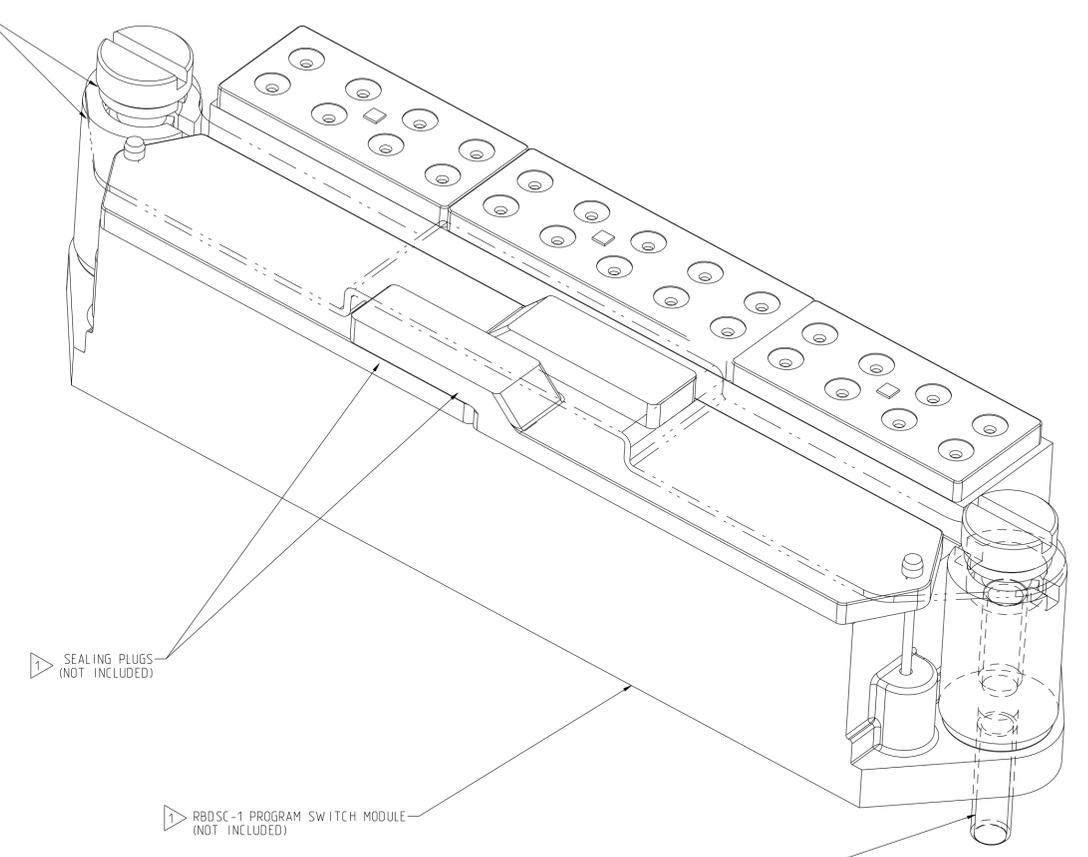

1 SEALING PLUGS (NOT INCLUDED)

1 RBDSC-1 PROGRAM SWITCH MODULE (NOT INCLUDED)

2 RBDSC-1P12 OR RBDSC-2P12 SECURITY COVER/MODULE MOUNTING STUD (NOT INCLUDED)

SECURITY COVER INSTALLED ON PROGRAM SWITCH MODULE
SCALE: NONE

REV	DESCRIPTION	DATE	BY	CHKD
K	REVISED PER ECN 12046	08-22-13	RSK	SDH
J	REVISED PER ECN10531	04-28-08	RWD	SDH
I	REVISED PER ECN10405	01-23-08	LY	SDH
H	REVISED PER ECN10307	10-12-07	SDH	SDH
G	REVISED PER ECN8399	07-27-04	SDH	SDH
F	REVISED PER ECN4792	09-17-01	RD	SDH
5	ADDED CAT NO. RBDSC-2P12 TO THE NOTE IN FIELD OF DRAWING. (ECN 3234)	03-06-95	RPS	CWL
4	CHANGED SCREW THREAD FROM 6-32 UNC-2A TO 6-32 UNC-3A. (ECN 3061)	08-04-94	CWL	CCP
3	REPOSITIONED INK STAMP ON UNDERSIDE OF COVER PLATE. (ECN 15008)	03-11-94	CCP	CCP
2	SEE REV REF PRINT. (ECN 15005)	03-02-94	CCP	CCP
1	SEE REV REF PRINT. (ECN 2378)	10-28-93	DLB	VEE

LINEAR MEASURE:	$\frac{NCH}{mm}$ NCH (mm)
THIRD ANGLE PROJECTION	
TOLERANCES UNLESS OTHERWISE SPECIFIED	
ONE PLACE	±.1 [±.3]
TWO PLACES	±.02 [±0.5]
THREE PLACES	±.010 [±0.25]
ANGLES	±1°

DRAWING TITLE
SECURITY COVER - PROGRAM SWITCH MODULE

CAT NO. **RBDSC-1P15 (SEE TABLE 1-1)**

CAGE NO: 09922 SIZE: D

CUSTOMER

SOURIAU

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.

www.souriau.com

DRAWN: LY 01.21.08
CHKD: SDH 01.21.08
DSGN: SDH 09.14.93
MFG: NV 09.14.93
QC: SJ 09.14.93
DRAWING SCALE: 5:1
DRAWING NO.: REV
SE95607 K
1 OF 1