



## ANT-W63WSx Series

### Hinged Blade WiFi 7/6/6E Antennas

The Linx W63WSx series are dipole, blade-style antennas for WiFi 7/WiFi 6/WiFi 6E applications in the 2.4 GHz, 5 GHz and 6 GHz bands. By providing a range of sizes and performance levels, Linx W63WSx antennas enable users to quickly find the antenna that best suits the needs of their solution.

All W63WSx series antennas have a hinged design which allows for the antenna to be positioned for optimum performance and connect via an SMA plug (male pin) or RP-SMA plug (female socket) connector.

#### FEATURES

- W63WSx performance range
  - VSWR:  $\leq 1.5$  to  $\leq 1.8$
  - Peak Gain: 4.7 dBi to 5.8 dBi
  - Efficiency: 62% to 89%
- Hinged design with detents for straight, 45 degree and 90 degree positioning
- W63WSx lengths
  - 85.5 mm to 203.0 mm (straight)
  - 65.0 mm to 178.6 mm (bent 90 degrees)

#### APPLICATIONS

- WiFi/WLAN coverage
  - WiFi 7 (802.11be)
  - WiFi 6E (802.11ax)
  - WiFi 6 (802.11ax)
  - WiFi 5 (802.11ac)
  - WiFi 4 (802.11n)
  - 802.11b/g
- 2.4 GHz ISM applications
  - Bluetooth®
  - ZigBee®
- U-NII bands 1-8
- Internet of Things (IoT) devices
- Smart Home networking
- Sensing and remote monitoring

#### ORDERING INFORMATION

Part Number	Description
ANT-W63WS1-RPS	WiFi 7/6/6E blade-style antenna with RP-SMA plug (female socket) connector
ANT-W63WS1-SMA	WiFi 7/6/6E blade-style antenna with SMA plug (male pin) connector
ANT-W63WS2-RPS	WiFi 7/6/6E blade-style antenna with RP-SMA plug (female socket) connector
ANT-W63WS2-SMA	WiFi 7/6/6E blade-style antenna with SMA plug (male pin) connector
ANT-W63WS3-SMA	WiFi 7/6/6E blade-style antenna with SMA plug (male pin) connector
ANT-W63WS4-RPS	WiFi 7/6/6E blade-style antenna with RP-SMA plug (female socket) connector
ANT-W63WS4-SMA	WiFi 7/6/6E blade-style antenna with SMA plug (male pin) connector
ANT-W63WS5-RPS	WiFi 7/6/6E blade-style antenna with RP-SMA plug (female socket) connector
ANT-W63WS5-SMA	WiFi 7/6/6E blade-style antenna with SMA plug (male pin) connector
ANT-W63WS6-IPW1-RPS	IP67 WiFi 7/6/6E blade-style antenna with RP-SMA plug (female socket) connector
ANT-W63WS6-IPW1-SMA	IP67 WiFi 7/6/6E blade-style antenna with SMA plug (male pin) connector

Available from Linx Technologies and select distributors and representatives.

**TABLE 1. SPECIFICATIONS**

Parameter	Value
Impedance	50 $\Omega$
Wavelength	1/2-wave
Electrical Type	Dipole
Radiation	Omnidirectional
Polarization	Linear
Connection	SMA plug (male pin) or RP-SMA plug (female socket)*
Antenna Color	Black
Operating Temp. Range	-20 °C to +65 °C
Packaging Information	The W63WSx series antenna is individually sealed in a clear plastic bag. Distribution channels may offer alternative packaging options.

Electrical specifications and plots measured with the antenna in a straight orientation.

\*RP-SMA not available on the ANT-W63WS3.

## VSWR

Model	2400 MHz to 2485 MHz	5150 MHz to 5850 MHz	5925 MHz to 7125 MHz
ANT-W63WS1	2.3	1.7	2.3
ANT-W63WS2	1.5	1.5	1.5
ANT-W63WS3	2.3	1.8	3.5
ANT-W63WS4	1.2	1.6	1.8
ANT-W63WS5	1.3	2.0	2.1
ANT-W63WS6-IPW1	1.8	1.6	1.5

## PEAK GAIN (DBi)

Model	2400 MHz to 2485 MHz	5150 MHz to 5850 MHz	5925 MHz to 7125 MHz
ANT-W63WS1	2.3	1.7	2.3
ANT-W63WS2	1.5	1.5	1.5
ANT-W63WS3	2.3	1.8	3.5
ANT-W63WS4	1.2	1.6	1.8
ANT-W63WS5	8.4	4.9	4.0
ANT-W63WS6-IPW1	9.4	4.7	7.2

## AVERAGE GAIN (DBi)

Model	2400 MHz to 2485 MHz	5150 MHz to 5850 MHz	5925 MHz to 7125 MHz
ANT-W63WS1	-2.4	-2.4	-2.6
ANT-W63WS2	-0.8	-0.6	-1.0
ANT-W63WS3	-4.3	-2.0	-3.1
ANT-W63WS4	-1.2	-1.0	-1.6
ANT-W63WS5	-1.7	-2.1	-2.6
ANT-W63WS6-IPW1	-1.3	-0.5	-0.9

## EFFICIENCY (%)

Model	2400 MHz to 2485 MHz	5150 MHz to 5850 MHz	5925 MHz to 7125 MHz
ANT-W63WS1	58	62	59
ANT-W63WS2	83	89	84
ANT-W63WS3	40	66	58
ANT-W63WS4	80	83	74
ANT-W63WS5	72	65	61
ANT-W63WS6-IPW1	77	94	86

## MAX POWER

ANT-W63WS1	5 W
ANT-W63WS2	30 W
ANT-W63WS3	5 W
ANT-W63WS4	10 W
ANT-W63WS5	10 W
ANT-W63WS6-IPW1	10 W

## WEIGHT

ANT-W63WS1	10.3 g (0.36 oz)
ANT-W63WS2	13.0 g (0.46 oz)
ANT-W63WS3	14.9 g (0.53 oz)
ANT-W63WS4	20.9 g (0.74 oz)
ANT-W63WS5	16.7 g (0.59 oz)
ANT-W63WS6-IPW1	22.8 g (0.80 oz)

## PRODUCT DIMENSIONS

Model	A (Straight)	B (Bent 90°)	C	D	E
ANT-W63WS1	85.5 mm (3.37 in)	65.0 mm (2.56 in)	16.4 mm (0.65 in)	11.5 mm (0.45 in)	33.6 mm (1.32 in)
ANT-W63WS2	133.5 mm (5.30 in)	115.0 mm (4.50 in)	20.1 mm (0.79 in)	10.0 mm (0.39 in)	34.2 mm (1.35 in)
ANT-W63WS3	135.7 mm (5.34 in)	114.8 mm (4.52 in)	20.1 mm (0.79 in)	10.0 mm (0.39 in)	37.9 mm (1.50 in)
ANT-W63WS4	179.6 mm (7.10 in)	156.0 mm (6.14 in)	22.0 mm (0.87 in)	13.0 mm (0.51 in)	43.2 mm (1.70 in)
ANT-W63WS5	135.6 mm (5.34 in)	111.8 mm (4.40 in)	24.1 mm (0.95 in)	11.0 mm (0.43 in)	40.2 mm (1.58 in)
ANT-W63WS6-IPW1	203.0 mm (7.99 in)	178.6 mm (7.03 in)	13.2 mm (0.52 in)	13.2 mm (0.52 in)	37.6 mm (1.48 in)

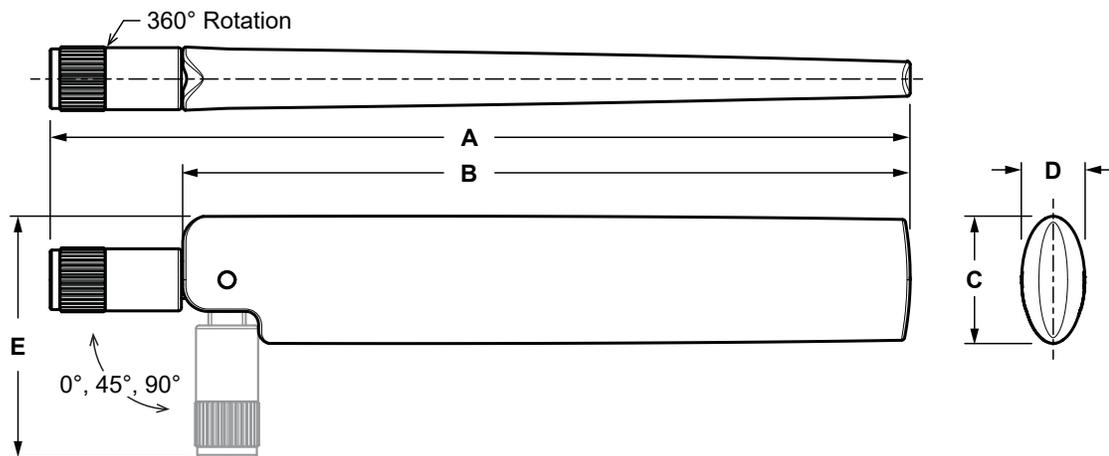


Figure 1. W63WSx Series Antenna Dimensions

---

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2023 TE Connectivity. All Rights Reserved.

02/23 Original