

Two Outputs PCI-Express Clock Generator

Features

- 25 MHz crystal or clock input
- Two sets of differential PCI-Express clocks
- Pin selectable output frequencies
- Supports HCSL compatible output levels
- Spread Spectrum capability on all output clocks with pin selectable spread range
- 16-pin TSSOP package
- Operating voltage 3.3 V
- Commercial, Industrial operating temperature range


Functional Description

CY24293 is a two output PCI-Express clock generator device intended for networking applications. The device takes 25 MHz crystal or clock input and provides two pairs of differential outputs at 25 MHz, 100 MHz, 125 MHz, or 200 MHz for HCSL signaling standard.

The device incorporates Lexmark Spread Spectrum profile for maximum electromagnetic interference (EMI) reduction. The spread type and amount can be selected using select pins.

For a complete list of related documentation, click [here](#).

Logic Block Diagram

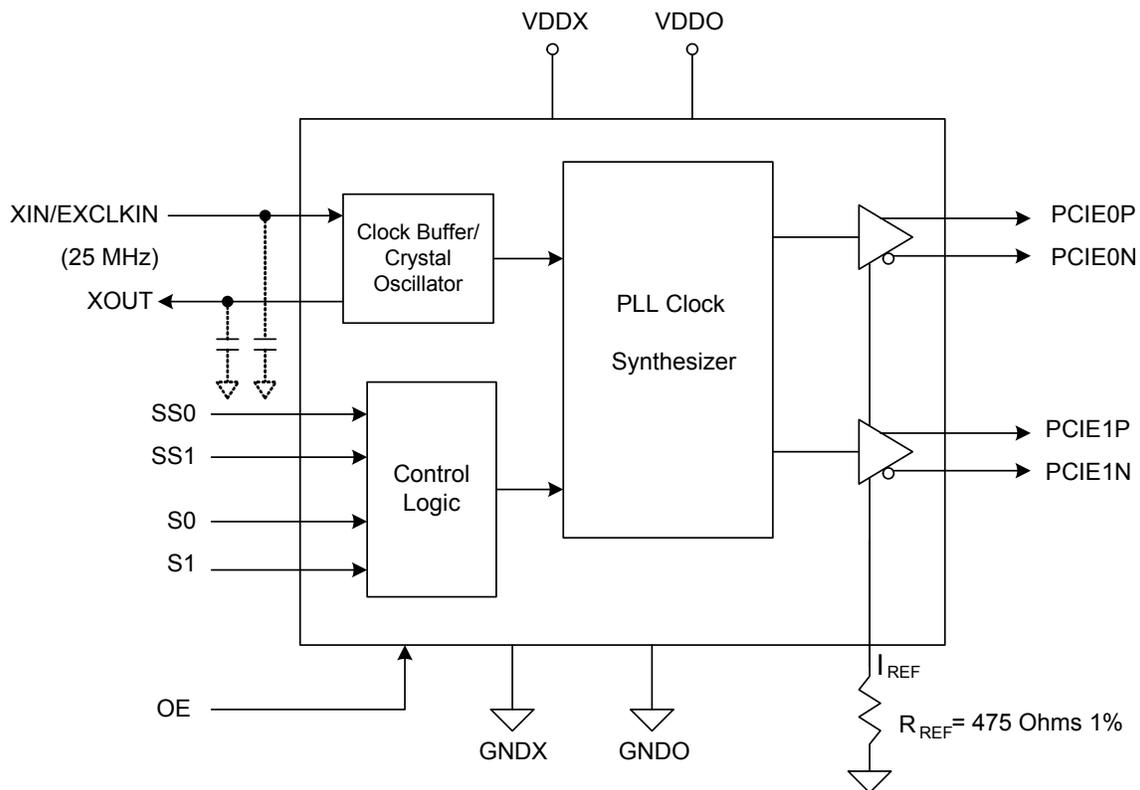


Contents

| | | | |
|---|----------|--|-----------|
| Pinouts | 3 | AC Electrical Characteristics | 8 |
| Pin Definitions | 3 | AC Electrical Characteristics | 9 |
| Output Frequency Selection Table | 4 | Test and Measurement Setup | 9 |
| Spread Selection Table | 4 | Ordering Information | 10 |
| Application Information | 5 | Ordering Code Definitions | 10 |
| Crystal Recommendations | 5 | Package Diagram | 11 |
| Crystal Loading | 5 | Acronyms | 12 |
| Calculating Load Capacitors | 5 | Document Conventions | 12 |
| Current Source (Iref) Reference Resistor | 5 | Units of Measure | 12 |
| Output Termination | 6 | Document History Page | 13 |
| Decoupling Capacitors | 6 | Sales, Solutions, and Legal Information | 15 |
| PCI-Express (HCSL Compatible) Layout Guidelines | 6 | Worldwide Sales and Design Support | 15 |
| Absolute Maximum Ratings | 7 | Products | 15 |
| Recommended Operation Conditions | 7 | PSoC® Solutions | 15 |
| DC Electrical Characteristics | 7 | Cypress Developer Community | 15 |
| Thermal Resistance | 7 | Technical Support | 15 |

Pinouts

Figure 1. 16-pin TSSOP pinout

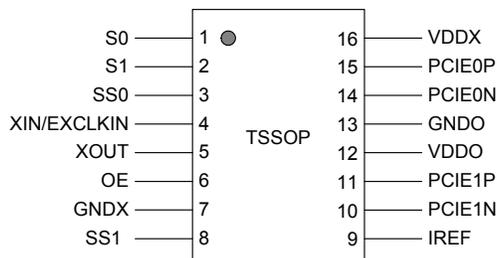

Pin Definitions

16-pin TSSOP

| Pin Number | Pin Name | Pin Type | Description |
|------------|---------------------|----------|--|
| 1 | S0 | Input | Frequency select pin. Has internal weak pull-up. Refer to Output Frequency Selection Table on page 4 . |
| 2 | S1 | Input | Frequency select pin. Has internal weak pull-up. Refer to Output Frequency Selection Table on page 4 . |
| 3 | SS0 ^[1] | Input | Spread spectrum select pin 0. Has internal weak pull-up. Refer to Spread Selection Table on page 4 . |
| 4 | XIN/EXCLKIN | Input | Crystal or clock input. 25 MHz fundamental mode crystal or clock input. |
| 5 | XOUT | Output | Crystal output. 25 MHz fundamental mode crystal input. Float for clock input. |
| 6 | OE | Input | High true output enable pin. When set low, PCI-E outputs are tri-stated. Has internal weak pull-up. |
| 7 | GNDX | Power | Ground |
| 8 | SS1 ^[1] | Input | Spread spectrum select pin 1. has internal weak pull-up. Refer to Spread Selection Table on page 4 . |
| 9 | IREF | Output | Current set for all differential clock drivers. Connect 475 Ω resistor to ground. |
| 10 | PCIE1N | Output | Differential PCI-Express complementary clock output. Tristated when disabled. |
| 11 | PCIE1P | Output | Differential PCI-Express true clock output. Tristated when disabled. |
| 12 | VDDO ^[2] | Input | 3.3 V Power supply for output driver and analog circuits. |
| 13 | GNDO | Power | Ground |
| 14 | PCIE0N | Output | Differential PCI-Express complementary clock output. Tristated when disabled. |
| 15 | PCIE0P | Output | Differential PCI-Express true clock output. Tristated when disabled. |
| 16 | VDDX ^[2] | Input | 3.3 V Power supply for oscillator and digital circuits. |

Notes

- Once powered up, state of SS1/SS0 pins should be held constant at the desired state.
- VDDX must be supplied faster or equal to VDDO.

Output Frequency Selection Table

| S1 | S0 | PCIE0[N,P], PCIE1[N,P] |
|----|----|------------------------|
| 0 | 0 | 25 MHz |
| 0 | 1 | 100 MHz |
| 1 | 0 | 125 MHz |
| 1 | 1 | 200 MHz |

Spread Selection Table

| SS1 ^[3] | SS0 ^[3] | Spread% |
|--------------------|--------------------|-----------|
| 0 | 0 | No Spread |
| 0 | 1 | -0.5% |
| 1 | 0 | -0.75% |
| 1 | 1 | No Spread |

Note

3. Once powered up, state of SS1/SS0 pins should be held constant at the desired state.

Output Termination

The PCI-Express differential clock outputs of the CY24293 are open source drivers and require an external series resistor and a resistor to ground. These resistor values and their allowable locations are explained in Figure 4.

PCB Layout Recommendations

For optimum device performance and the lowest phase noise, the following guidelines must be observed:

1. Each 0.01 μF decoupling capacitor must be mounted on the component side of the board as close to the V_{DD} pin as possible.
2. No vias must be used between the decoupling capacitor and the V_{DD} pin.

3. The PCB trace to the V_{DD} pin and the ground via must be kept as short as possible. Distance of the ferrite bead and bulk decoupling from the device is less critical.
4. An optimum layout is one with all components on the same side of the board, minimizing vias through other signal layers (any ferrite beads and bulk decoupling capacitors can be mounted on the back). Other signal traces must be routed away from the CY24293. This includes signal traces just underneath the device, or on layers adjacent to the ground plane layer used by the device.

Decoupling Capacitors

The decoupling capacitors of 0.01 μF must be connected between V_{DD} and GND as close to the device as possible. Do not share ground vias between components. Route power from the power source through the capacitor pad and then into the CY24293 pin.

PCI-Express (HCSL Compatible) Layout Guidelines


Table 2. Common Recommendations for Differential Routing

| Differential Routing | Dimension or Value | Unit |
|---|--------------------|----------|
| L1 length, route as non-coupled 50 Ω trace | 0.5 max | inch |
| L2 length, route as non-coupled 50 Ω trace | 0.2 max | inch |
| L3 length, route as non-coupled 50 Ω trace | 0.2 max | inch |
| R_S | 33 | Ω |
| R_T | 49.9 | Ω |

Table 3. Differential Routing for PCI-Express Load or Connector

| Differential Routing | Dimension or Value | Unit |
|--|--------------------|------|
| L4 length, route as coupled microstrip 100 Ω differential trace | 2 to 32 | inch |
| L4 length, route as coupled stripline 100 Ω differential trace | 1.8 to 30 | inch |

Figure 4. PCI-Express Differential Routing

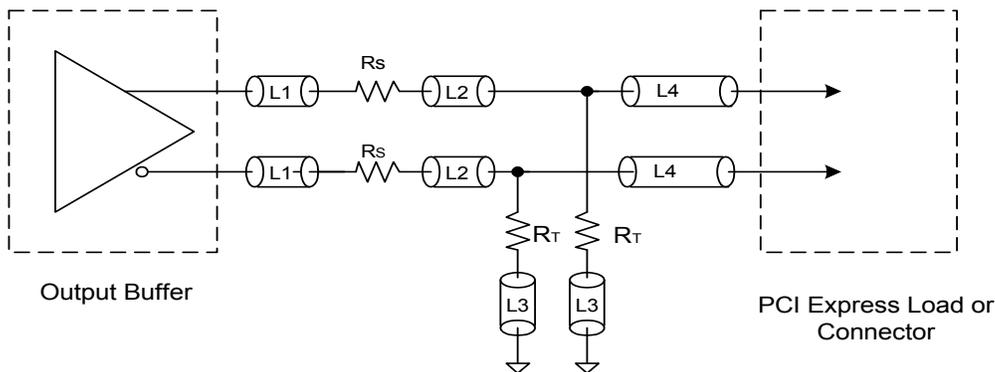

Absolute Maximum Ratings

Exceeding maximum ratings may shorten the useful life of the device. User guidelines are not tested.

| Parameter | Description | Condition | Min | Max | Unit |
|--------------------|-----------------------------------|-----------------------------|----------------|-----------------------|------|
| V _{DD} | Supply voltage | | -0.5 | 4.6 | V |
| V _{IN} | Input voltage | Relative to V _{SS} | -0.5 | V _{DD} + 0.5 | V |
| T _S | Temperature, Storage | Non Functional | -65 | +150 | °C |
| T _J | Temperature, Junction | Non Functional | -65 | +150 | °C |
| ESD _{HBM} | ESD Protection (Human Body Model) | JEDEC EIA/JESD22-A114-E | 2000 | - | V |
| UL-94 | Flammability rating | - | V-0 at 1/8 in. | | |
| MSL | Moisture sensitivity level | - | 3 | | |

Recommended Operation Conditions

| Parameter | Description | Min | Typ | Max | Unit |
|--------------------|--|------|-----|-----|------|
| V _{DD} | Supply voltage | 3.0 | - | 3.6 | V |
| T _{AC} | Commercial ambient temperature | 0 | - | +70 | °C |
| T _{AI/AA} | Industrial ambient temperature | -40 | - | +85 | °C |
| t _{PU} | Power up time for all V _{DD} to reach minimum specified voltage (power ramps must be monotonic) | 0.05 | - | 500 | ms |

DC Electrical Characteristics

Unless otherwise stated, V_{DD} = 3.3 V ± 0.3 V, ambient temperature = -40 °C to +85 °C Industrial, 0 °C to +70 °C Commercial

| Parameter ^[4] | Description | Condition | Min | Typ | Max | Unit |
|--------------------------|---|---|------|------|-----------------------|------|
| V _{IL} | Input low voltage | - | -0.3 | - | 0.8 | V |
| V _{IH} | Input high voltage | - | 2.0 | - | V _{DD} + 0.3 | V |
| V _{OL} | Output low voltage of PCIE0[P/N], PCIE1[P/N] | HCSL termination (R _S = 33 Ω, R _T = 49.9 Ω). See note 19. | -0.2 | 0 | 0.05 | V |
| V _{OH} | Output high voltage of PCIE0[P/N], PCIE1[P/N] | HCSL termination (R _S = 33 Ω, R _T = 49.9 Ω). See note 19. | 0.65 | 0.71 | 0.95 | V |
| I _{DD} | Operating supply current | No load, OE = 1 | - | 45 | 60 | mA |
| I _{DDOD} | Output disabled current | OE = 0 | - | - | 50 | mA |
| C _{IN} | Input capacitance | All input pins | - | 5 | - | pF |
| R _{PU} | Pull-up resistance | S0, S1, SS0, SS1, OE | - | 70k | - | Ω |

Thermal Resistance

| Parameter ^[6] | Description | Test Conditions | 16-pin TSSOP | Unit |
|--------------------------|--|---|--------------|------|
| θ _{JA} | Thermal resistance (junction to ambient) | Test conditions follow standard test methods and procedures for measuring thermal impedance, in accordance with EIA/JESD51. | 89 | °C/W |
| θ _{JC} | Thermal resistance (junction to case) | | 12 | °C/W |

Note

- Parameters are guaranteed by design and characterization. Not 100% tested in production.
- These parameters are guaranteed by design and are not tested.

AC Electrical Characteristics

Unless otherwise stated: $V_{DD} = 3.3 \text{ V} \pm 0.3 \text{ V}$, ambient temperature = $-40 \text{ }^{\circ}\text{C}$ to $+85 \text{ }^{\circ}\text{C}$ Industrial, $0 \text{ }^{\circ}\text{C}$ to $+70 \text{ }^{\circ}\text{C}$ Commercial, Outputs HCSL terminated.

| Parameter ^[6] | Description | Condition | Min | Typ | Max | Unit |
|--------------------------|--|---|------|------|---------|------|
| F_{IN} | Input clock frequency (crystal or external clock) | – | – | 25 | – | MHz |
| T_{INDC} | Input clock duty cycle | – | 40 | – | 60 | % |
| F_{OUT} | Output frequency | HCSL termination | – | – | 200 | MHz |
| F_{ERR} | Frequency synthesis error | – | – | 0 | – | ppm |
| T_{CCJ} | Cycle-to-cycle jitter | See notes 7, 8 | – | – | 75 | ps |
| $SP_{PROFILE}$ | Spread modulation profile | – | – | – | Lexmark | type |
| SP_{MOD} | Spread modulation frequency | – | 30 | 32 | 33 | kHz |
| T_{DC} | Output clock duty cycle | See notes: 7, 9 | 45 | 50 | 55 | % |
| T_{OEHL} | Output enable time | OE going high to differential outputs becoming valid | – | – | 200 | ns |
| T_{OEL} | Output disable time | OE going low to differential outputs becoming invalid | – | – | 200 | ns |
| T_{LOCK} | Clock stabilization from power up | Measured from 90% of the applied power supply level | – | 1 | 2 | ms |
| T_R | Output rise time | Measured from 0.175 V to 0.525 V. See notes: 7, 10 | 130 | – | 700 | ps |
| T_F | Output fall time | Measured from 0.525 V to 0.175 V. See notes: 7, 10 | 130 | – | 700 | ps |
| DT_R | Rise time variation | For a given frequency, Max (T_R) – Min (T_R) | – | – | 125 | ps |
| DT_F | Fall time variation | For a given frequency, Max (T_F) – Min (T_F) | – | – | 125 | ps |
| T_{OSKEW} | Output skew | Measured at V_{CROSS} point. See note: 11 | – | – | 50 | ps |
| V_{CROSS} | Absolute crossing point voltage | See notes: 9, 10, 12 | 0.25 | 0.35 | 0.55 | V |
| V_{Xdelta} | Variation of V_{CROSS} over all rising clock edges | See notes: 9, 10, 13 | – | – | 140 | mV |

Notes

6. Parameters are guaranteed by design and characterization. Not 100% tested in production.
7. Measured with $C_{load} = 4 \text{ pF}$ max. (scope probe + trace load).
8. Measurement taken from differential waveform (PCIEP minus PCIEI). Either single ended probes with math or a differential probe can be used.
9. Measured at crossing point where the instantaneous voltage value of the rising edge of PCIEP equals the falling edge of PCIEI.
10. Measurement taken from single ended waveform.
11. Measured at the rising 0V point of the differential signal. Skew is the time difference of the rising 0V point between any two differential signal pairs. The measurement is taken over 1000 samples, and the average value is used.
12. Refers to the total variation from the lowest crossing point to the highest, regardless of which edge is crossing. Refers to all crossing points for this measurement.
13. Defined as the total variation of all crossing voltages of Rising PCIEP and Falling PCIEI. This is the maximum allowed variance in V_{CROSS} for any particular system.


AC Electrical Characteristics

Differential 100 MHz, HCSL Terminated Outputs (Parameters for the PCI Express Specification. Use above AC Characteristics parameter where it is not listed in this section)

| Parameter | Description | Test Conditions | Min | Typ | Max | Units |
|-------------------------|--|--------------------------------|-------|-----|--------|-------|
| F _{OUT} | Output frequency | | – | – | 100 | MHz |
| T _{PHJ} | Peak-to-peak phase jitter | 10 ⁻⁶ BER. Note: 14 | – | 30 | 86 | ps |
| ER _R | Rising edge rate | See notes: 15, 16 | 0.6 | 1.3 | 4.0 | V/ns |
| ER _F | Falling edge rate | See notes: 15, 16 | 0.6 | 1.3 | 4.0 | V/ns |
| T _{PERIOD AVG} | Average clock period accuracy | See notes: 15, 17 | -300 | – | 2800 | ppm |
| T _{PERIOD ABS} | Absolute clock period | See notes: 15, 18 | 9.847 | – | 10.203 | ns |
| RF _{MATCHING} | Rising edge rate to falling edge rate matching | See note: 19, 20 | – | – | 20 | % |

Test and Measurement Setup

Figure 5. Test Load Configuration for Differential Output Signals

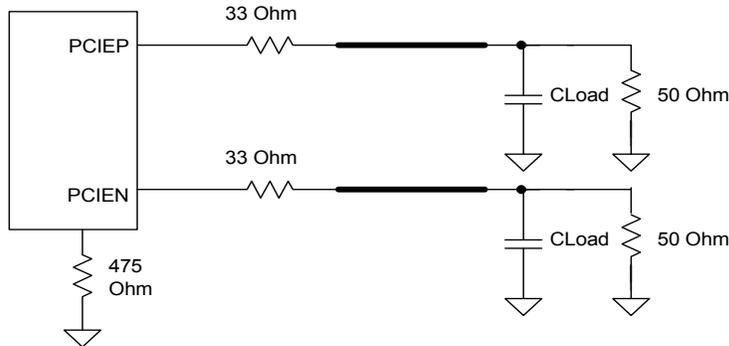

Notes


14. Phase jitter is determined using data captured on an oscilloscope at a sample rate of 20 GS/sec, for a minimum 100,000 continuous clock periods. This data is then processed using the ClockJitter 1.3.0 software from PCISIG, using the PCI_E_1_1 template.
15. Measurement taken from differential waveform (PCIEP minus PCIEEN). Either single ended probes with math or a differential probe can be used.
16. Measured from -150 mV to +150 mV on the differential waveform (derived from PCIEP minus PCIEEN). The signal must be monotonic through the measurement region for rise and fall time. The 300 mV measurement window is centered on the differential zero crossing.
17. PPM refers to parts per million and is a DC absolute period accuracy specification. The period is to be measured with a frequency counter with measurement window set to 100 ms or greater. The ±300 PPM applies to systems that do not employ Spread Spectrum or that use common clock source. For systems employing Spread Spectrum, there is an additional 2500 PPM nominal shift in maximum period resulting from the 0.5% down spread, resulting in a maximum average period specification of +2800 PPM.
18. Defined as the absolute minimum or maximum instantaneous period. This includes cycle-to-cycle jitter, relative PPM tolerance, and spread spectrum modulation.
19. Measurement taken from single ended waveform.
20. Matching applies to rising edge rate for PCIEP and falling edge for PCIEEN. It is measured using a ± 75mV window centered on the median cross point where PCIEP rising meets PCIEEN falling.

Ordering Information

| Part Number | Type | Production Flow |
|----------------|------------------------------|-----------------------------|
| Pb-free | | |
| CY24293ZXC | 16-pin TSSOP | Commercial, 0 °C to 70 °C |
| CY24293ZXCT | 16-pin TSSOP – Tape and Reel | Commercial, 0 °C to 70 °C |
| CY24293ZXI | 16-pin TSSOP | Industrial, –40 °C to 85 °C |
| CY24293ZXIT | 16-pin TSSOP – Tape and Reel | Industrial, –40 °C to 85 °C |

Ordering Code Definitions

CY 24293 Z X X X

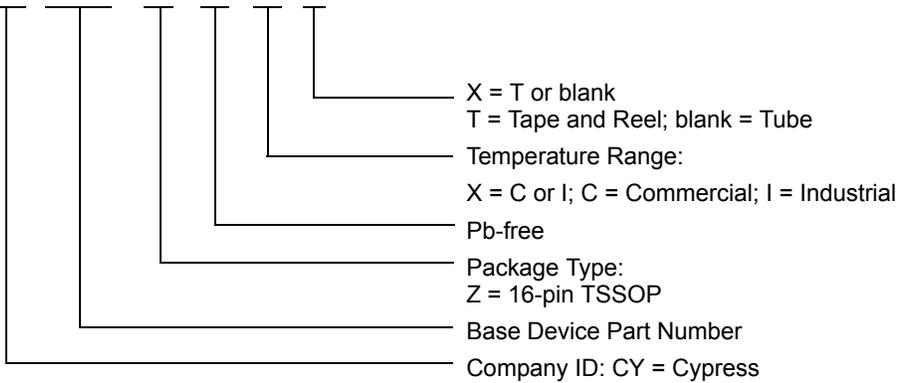

Acronyms

| Acronym | Description |
|---------|--|
| EIA | electronic industries alliance |
| EMI | electromagnetic interference |
| ESD | electrostatic discharge |
| HCSL | high speed current steering logic |
| JEDEC | joint electron devices engineering council |
| PCB | printed circuit board |
| PCI | peripheral component interconnect |
| PLL | phase-locked loop |
| TSSOP | thin shrunk small outline package |

Document Conventions

Units of Measure

| Symbol | Unit of Measure |
|--------|-------------------|
| °C | degree Celsius |
| kHz | kilohertz |
| MHz | megahertz |
| μF | microfarad |
| mA | milliampere |
| ms | millisecond |
| mV | millivolt |
| mW | milliwatt |
| ns | nanosecond |
| Ω | ohm |
| ppm | parts per million |
| % | percent |
| pF | picofarad |
| ps | picosecond |
| V | volt |

Document History Page

| Document Title: CY24293, Two Outputs PCI-Express Clock Generator | | | | |
|--|---------|-----------------|-----------------|--|
| Document Number: 001-46117 | | | | |
| Rev. | ECN No. | Orig. of Change | Submission Date | Description of Change |
| ** | 2490167 | PYG/DPF/AESA | See ECN | New data sheet. |
| *A | 2507681 | DPF / AESA | 05/23/2008 | Added Note 1: Parameters are guaranteed by design and characterization. Not 100% tested in production. Added Note 2 for Duty cycle spec in the AC Elect. Characteristics. Added HCSL termination in Condition for V_{OL} , V_{OH} DC Elect. Char. Added V_{Xdelta} value of 140 mV in the Differential 100 MHz HCSL output. Changed Cload from 2 pF to 4 pF in Note 2. Added internal weak Pull-ups for S0, S1, SS0, SS1 and OE pins. Updated T_{OEHL} and T_{OEL} to 200 ns (max.). Updated to new template. |
| *B | 2621901 | CXQ / AESA | 12/19/2008 | Updated I_{DD} spec in DC Electrical Characteristics. Added max spec for I_{DDOD} DC Electrical Characteristics. Added R_{PU} in DC Electrical Characteristics. Replaced T_{REFVAR} with DT_R and DT_F in AC Electrical Characteristics. Added definitions for rise and fall time variation, crossing point variation in AC Electrical Characteristics. Reduced cycle-to-cycle jitter spec to 75ps in AC Electrical Characteristics. |
| *C | 2683343 | CXQ / PYRA | 04/03/2009 | Changed status from Preliminary to Final. Added "max" to crystal ESR spec. Changed "LVDS Down Device" to "LVDS Device" in Table 8 and Figure 4. |
| *D | 3289802 | BASH | 06/27/2011 | Added Ordering Code Definitions . Updated Package Diagram . Added Acronyms and Units of Measure . Updated to new template. |
| *E | 3395894 | PURU | 10/05/2011 | Updated Features (Removed LVDS related information). Updated Functional Description (Removed LVDS related information). Updated Output Termination under Application Information (Removed LVDS related information). Removed the section LVDS Compatible Layout Guidelines under the main section PCI-Express (HCSL Compatible) Layout Guidelines . Updated AC Electrical Characteristics (Removed LVDS related information). Updated Package Diagram . Updated to new template. |
| *F | 4467398 | XHT | 08/08/2014 | Updated DC Electrical Characteristics : Changed maximum value of V_{OH} parameter from 0.85 V to 0.95 V. |
| *G | 4581659 | TAVA | 11/28/2014 | Updated Functional Description : Added "For a complete list of related documentation, click here ." at the end. Updated Package Diagram . |

Document History Page (continued)

| Document Title: CY24293, Two Outputs PCI-Express Clock Generator Document Number: 001-46117 | | | | |
|--|---------|-----------------|-----------------|--|
| Rev. | ECN No. | Orig. of Change | Submission Date | Description of Change |
| *H | 4817220 | XHT | 07/25/2015 | <p>Updated Pin Definitions: Added Note 1 and referred the same note in SS0 and SS1 pins. Added Note 2 and referred the same note in VDDO and VDDX pins. Updated Spread Selection Table: Added Note 3 and referred the same note in "SS1" and "SS0" columns. Updated Application Information: Updated Current Source (Iref) Reference Resistor: Updated description. Added Figure 3. Updated AC Electrical Characteristics: Added SP_{PROFILE} parameter and its details. Added minimum value of SP_{MOD} parameter (30 kHz). Added maximum value of SP_{MOD} parameter (33 kHz). Updated Note 10 (Replaced differential with single ended). Added AC Electrical Characteristics (to specify PCIe parameter specifications). Updated to new template. Completing Sunset Review.</p> |
| *I | 5281627 | PSR | 05/23/2016 | <p>Added Thermal Resistance. Updated to new template.</p> |
| *J | 5787395 | PSR | 06/27/2017 | <p>Updated AC Electrical Characteristics: Added T_{INDC} parameter. Updated template.</p> |

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

| | |
|-------------------------------|--|
| ARM® Cortex® Microcontrollers | cypress.com/arm |
| Automotive | cypress.com/automotive |
| Clocks & Buffers | cypress.com/clocks |
| Interface | cypress.com/interface |
| Internet of Things | cypress.com/iot |
| Memory | cypress.com/memory |
| Microcontrollers | cypress.com/mcu |
| PSoC | cypress.com/psoc |
| Power Management ICs | cypress.com/pmic |
| Touch Sensing | cypress.com/touch |
| USB Controllers | cypress.com/usb |
| Wireless Connectivity | cypress.com/wireless |

PSoC® Solutions

[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#) | [PSoC 6](#)

Cypress Developer Community

[Forums](#) | [WICED IOT Forums](#) | [Projects](#) | [Video](#) | [Blogs](#) | [Training](#) | [Components](#)

Technical Support

cypress.com/support

© Cypress Semiconductor Corporation, 2008-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.