



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.









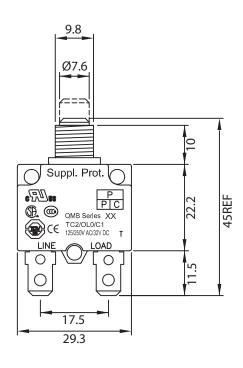

NOTES:

RATING: 5A 125/250V AC/32V DC APPROVALS: UL, cUL, TUV, CCC, CE, CSA BUTTON COLOR: BLACK BUTTON PRINT COLOR: WHITE PLASTIC BUSHING PLASTIC MOUNTING NUT ROHS COMPLIANT

1.2 ±

CONTROLLED

Dim range	Tolerance +/-	DDC DIVISION .		
(mm)	(mm)			
0-1	0.15	Description: CIRCUIT BREAKER		
1-6	0.20			
6-18	0.30		LINUT	
18-50	0.50		UNIT: mm	
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	R.Nuti	06-04-15	LY / 06-04-15
250-500	1.20	06-04-15	00 04-13	1 21,000413