




Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part	Revision Record	Changed	Date	Дрргочец	Date
0.00	Design Release	·	SEE ECN# 013484	GRW	6/30/2016	KAC	6/30/2016


FEATURES AND BENEFITS:


- INDUSTRY STANDARD SIZE: LGX FOOTPRINT 5 3/32 [130] X 1 5/32 [29].
- SILKSCREENED PORTS NUMBERS ON BOTH SIDES.
- WIDE VARIETY OF ADAPTER QUANTITY & TYPE.
- MANUFACTURED WITH HIGH PERFORMANCE COMPONENT MATERIALS.
- LOW INSERTION LOSS.
- PRECISE ALIGNMENT FOR GLASS-TO-GLASS CONTACT.
- BLANK ADAPTER STRIP ALSO AVAILABLE TO COVER UNOCCUPIED CUT-OUTS.
- PUSH-PIN MECHANISM ALLOWS EASY AND QUICK TOOL-LESS INSTALLATION.


NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
- 2. INSERTION LOSS: 0.3dB MAX.
- 3. OPERATING & STORAGE TEMPERATURE -40°C TO +85°C
- 4. CERTIFICATIONS AND COMPLIANCES:
 - ROHS
- GR-326-CORE
- TIA/EIA-568-C.3
- TIA-604-2
- UL 94
- IEC-61754-1
- ASTM A1008

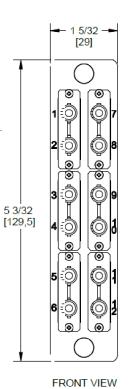

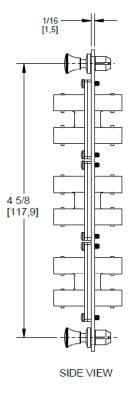



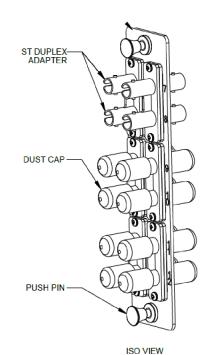

Type #	Mode	Article #	
VFAP12SMMST	MULTI	904-00379	
VFAP12SSMSTZ	SINGLE	904-00380	

METAL ADAPTER STRIP 16 GAUGE ALUMINIUM

ASSEMBLED

Material

inches Dimension without tolerances details to: $.xxxx = \pm .0005$

Units:

 $.XXX = \pm .005$ $.XX = \pm .01$ $.X = \pm .03$

None = $\pm .06$ \angle = ±0.5°

Dimension Formatted in/[mm]

The copyright of this drawing is reserved by HellermannTvton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.

	Drawn	GRW	6/29/2016		
	Approved	KAC	6/29/2016		

HellermannTyton

North America Email: corp@htamericas.com Web: www.hellermann.tyton.com Title FT ADAPTER PANEL WITH 12 ST

CONNECTORS Drawing-No

16-1270-001-CSU

Article/Type-No VFAP12_

Project Number PRP 16-1270 PRODUCTION : Phase Format AΗ

1:1

1/1

Scale