



**Trench HiperFET™
Power MOSFET**
IXFH230N10T

**V_{DSS} = 100V
I_{D25} = 230A
R_{DS(on)} ≤ 4.7mΩ**



N-Channel Enhancement Mode
Avalanche Rated
Fast Intrinsic Rectifier

TO-247



G = Gate D = Drain
S = Source TAB = Drain

Symbol	Test Conditions	Maximum Ratings	
V _{DSS}	T _J = 25°C to 175°C	100	V
V _{DGR}	T _J = 25°C to 175°C, R _{GS} = 1MΩ	100	V
V _{GSS}	Continuous	± 20	V
V _{GSM}	Transient	± 30	V
I _{D25}	T _C = 25°C	230	A
I _{LRMS}	Lead Current Limit, RMS	160	A
I _{DM}	T _C = 25°C, Pulse Width Limited by T _{JM}	500	A
I _A	T _C = 25°C	115	A
E _{AS}	T _C = 25°C	1.5	J
P _D	T _C = 25°C	650	W
T _J		-55 ... +175	°C
T _{JM}		175	°C
T _{stg}		-55 ... +175	°C
T _L	1.6mm (0.062in.) from Case for 10s	300	°C
T _{sold}	Plastic Body for 10 Seconds	260	°C
Weight		6	g

Features

- International Standard Package
- 175°C Operating Temperature
- High Current Handling Capability
- Avalanche Rated
- Fast Intrinsic Rectifier
- Low R_{DS(on)}

Advantages

- Easy to Mount
- Space Savings
- High Power Density

Symbol	Test Conditions (T _J = 25°C Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
BV _{DSS}	V _{GS} = 0V, I _D = 1mA	100		V
V _{GS(th)}	V _{DS} = V _{GS} , I _D = 1mA	2.5		4.5 V
I _{GSS}	V _{GS} = ± 20V, V _{DS} = 0V		±200	nA
I _{DSS}	V _{DS} = V _{DSS} V _{GS} = 0V		50	μA
R _{DS(on)}	V _{GS} = 10V, I _D = 0.5 • I _{D25}	Notes 1, 2		4.7 mΩ

Applications

- DC-DC Converters
- Battery Chargers
- Switched-Mode and Resonant-Mode Power Supplies
- DC Choppers
- AC Motor Drives
- Uninterruptible Power Supplies
- High Speed Power Switching Applications


Symbol	Test Conditions ($T_J = 25^\circ\text{C}$, Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
g_{fs}	$V_{DS} = 10\text{V}$, $I_D = 60\text{A}$, Note 1	80	135	S
C_{iss} C_{oss} C_{rss}	$V_{GS} = 0\text{V}$, $V_{DS} = 25\text{V}$, $f = 1\text{MHz}$	15.3		nF
		1525		pF
		195		pF
$t_{d(on)}$ t_r $t_{d(off)}$ t_f	Resistive Switching Times $V_{GS} = 10\text{V}$, $V_{DS} = 0.5 \cdot V_{DSS}$, $I_D = 100\text{A}$ $R_G = 1\Omega$ (External)	29		ns
		40		ns
		45		ns
		15		ns
$Q_{g(on)}$ Q_{gs} Q_{gd}	$V_{GS} = 10\text{V}$, $V_{DS} = 0.5 \cdot V_{DSS}$, $I_D = 0.5 \cdot I_{D25}$	250		nC
		70		nC
		65		nC
R_{thJC}			0.23	°C/W
R_{thCH}		0.21		°C/W

Source-Drain Diode

Symbol	Test Conditions ($T_J = 25^\circ\text{C}$, Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
I_s	$V_{GS} = 0\text{V}$		230	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}		900	A
V_{SD}	$I_F = 100\text{A}$, $V_{GS} = 0\text{V}$, Note 1		1.3	V
t_{rr} I_{RM} Q_{RM}	$I_F = 100\text{A}$, $V_{GS} = 0\text{V}$ -di/dt = 100A/μs $V_R = 50\text{V}$	82		ns
		4.8		A
		196		nC

Note 1: Pulse Test, $t \leq 300\mu\text{s}$; Duty Cycle, $d \leq 2\%$.

TO-247 (IXFH) Outline

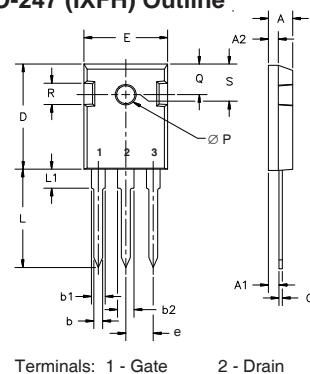

Terminals: 1 - Gate 2 - Drain

Dim.	Millimeter Min.	Millimeter Max.	Inches Min.	Inches Max.
A	4.7	5.3	.185	.209
A ₁	2.2	2.54	.087	.102
A ₂	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b ₁	1.65	2.13	.065	.084
b ₂	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	.205	.225
L	19.81	20.32	.780	.800
L1		4.50		.177
ØP	3.55	3.65	.140	.144
Q	5.89	6.40	.232	.252
R	4.32	5.49	.170	.216


PRELIMINARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from data gathered during objective characterizations of preliminary engineering lots; but also may yet contain some information supplied during a pre-production design evaluation. IXYS reserves the right to change limits, test conditions, and dimensions without notice.


IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537


**Fig. 1. Output Characteristics
@ 25°C**

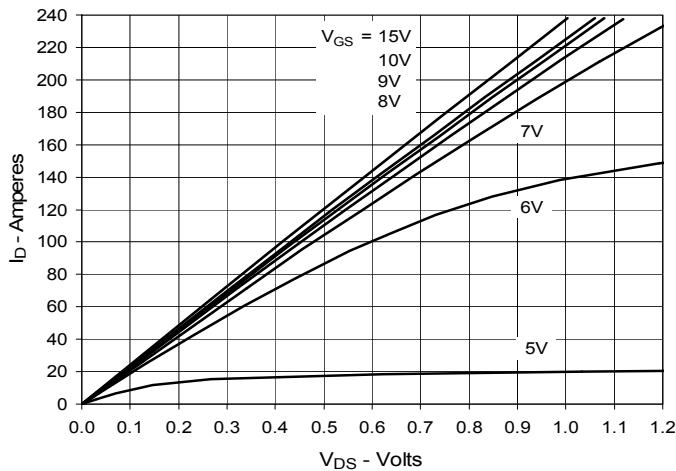


**Fig. 3. Output Characteristics
@ 150°C**

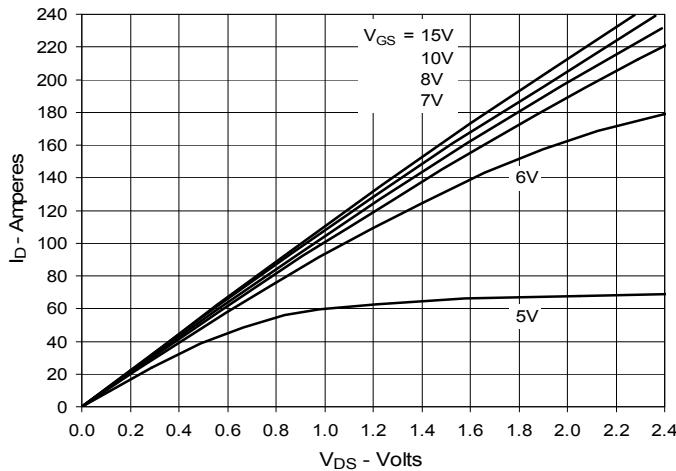

**Fig. 5. $R_{DS(on)}$ Normalized to $I_D = 115A$ Value
vs. Drain Current**

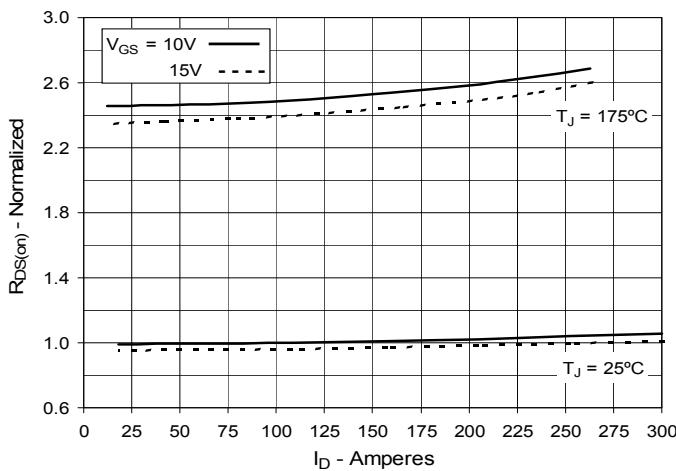

**Fig. 2. Extended Output Characteristics
@ 25°C**

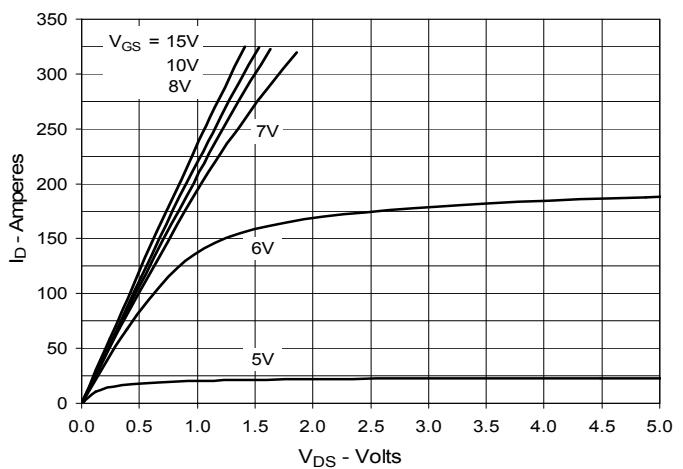

**Fig. 4. $R_{DS(on)}$ Normalized to $I_D = 115A$ Value
vs. Junction Temperature**

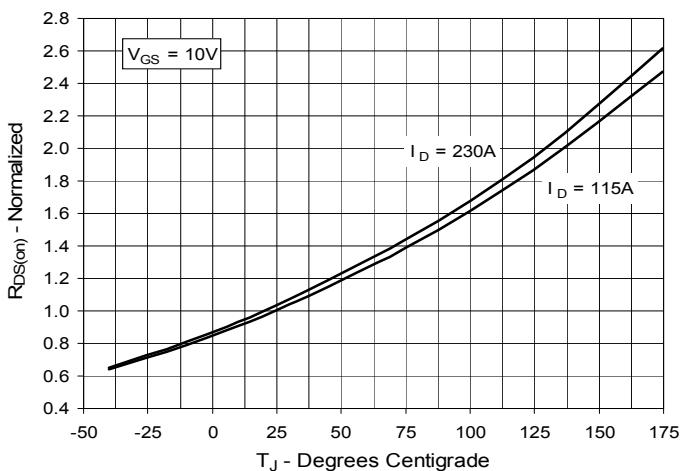


Fig. 6. Drain Current vs. Case Temperature









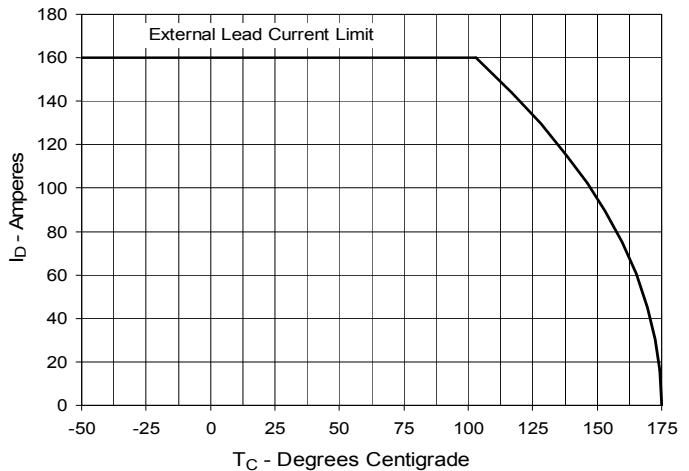


Fig. 7. Input Admittance**Fig. 8. Transconductance****Fig. 9. Forward Voltage Drop of Intrinsic Diode****Fig. 10. Gate Charge****Fig. 11. Capacitance****Fig. 12. Forward-Bias Safe Operating Area**


**Fig. 13. Resistive Turn-on
Rise Time vs. Junction Temperature**

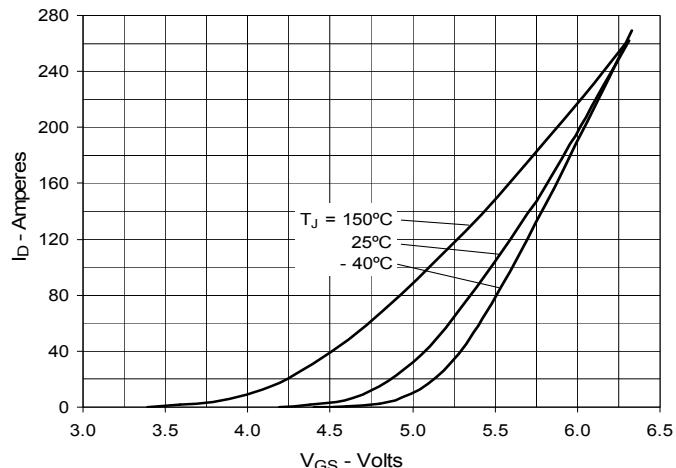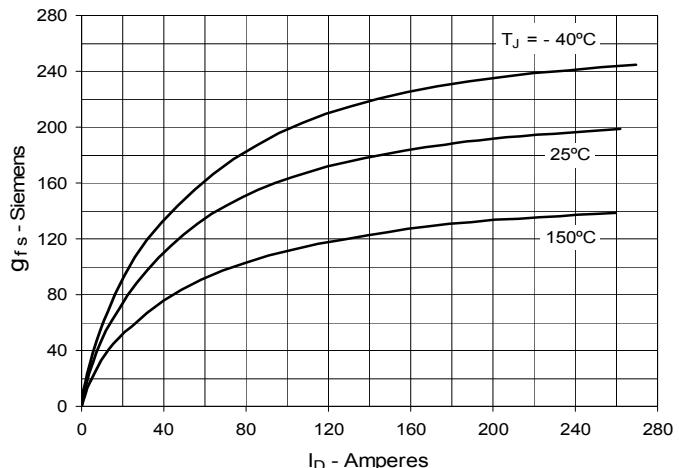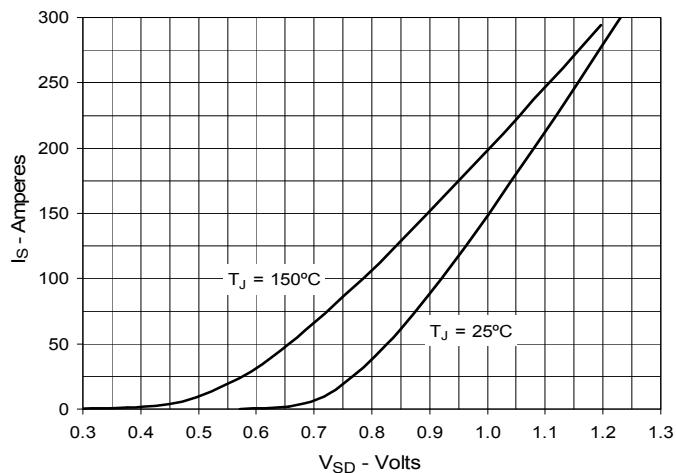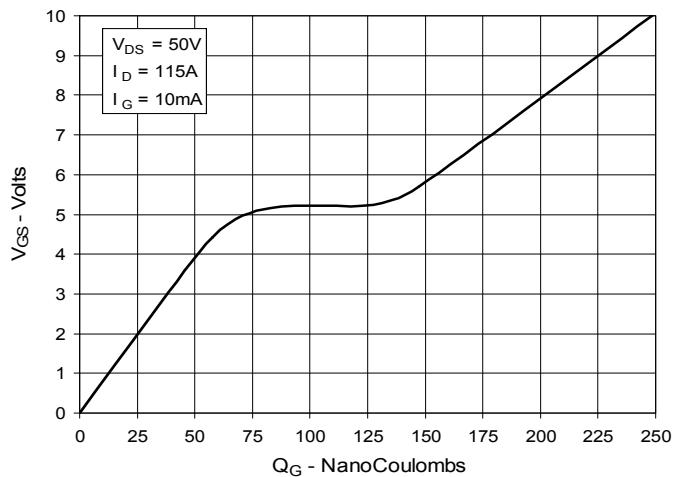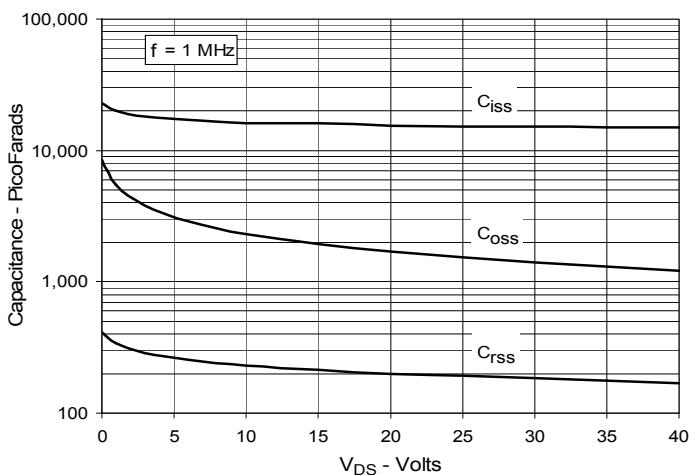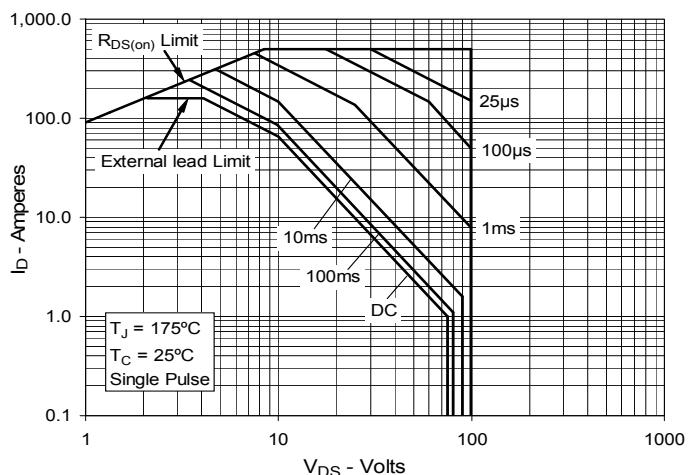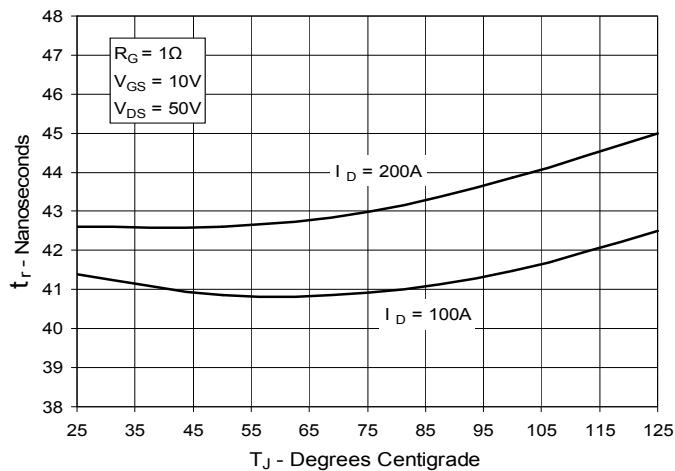


**Fig. 15. Resistive Turn-on
Switching Times vs. Gate Resistance**

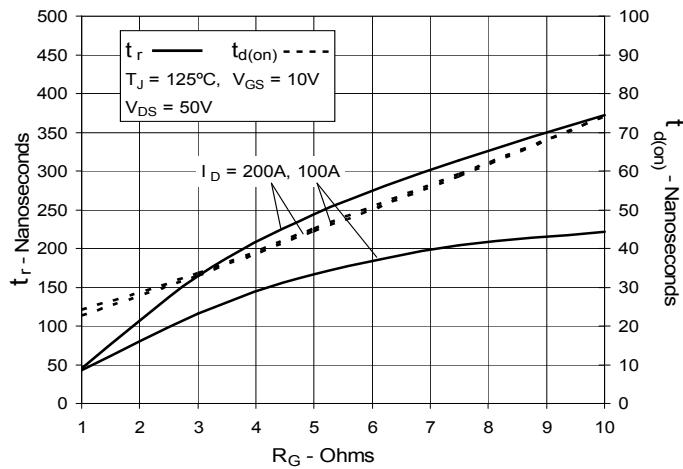


**Fig. 17. Resistive Turn-off
Switching Times vs. Drain Current**

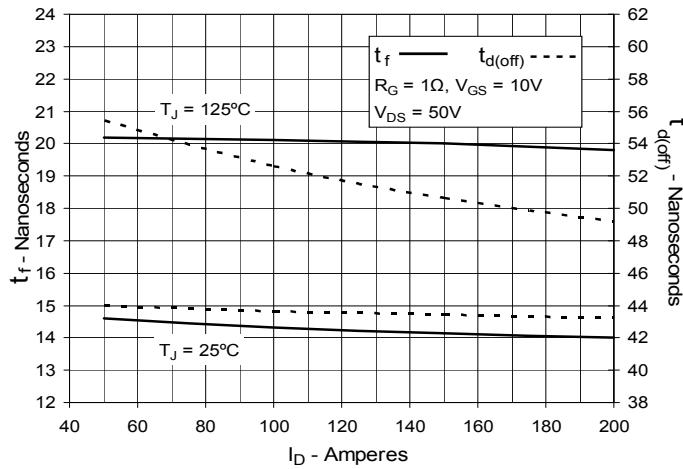

**Fig. 14. Resistive Turn-on
Rise Time vs. Drain Current**

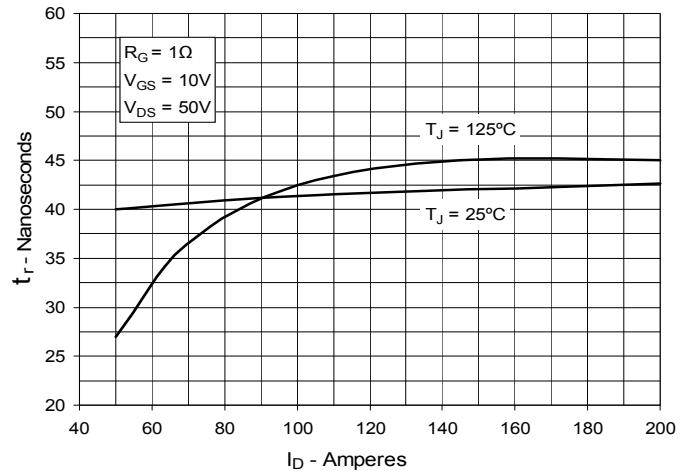

**Fig. 16. Resistive Turn-off
Switching Times vs. Junction Temperature**

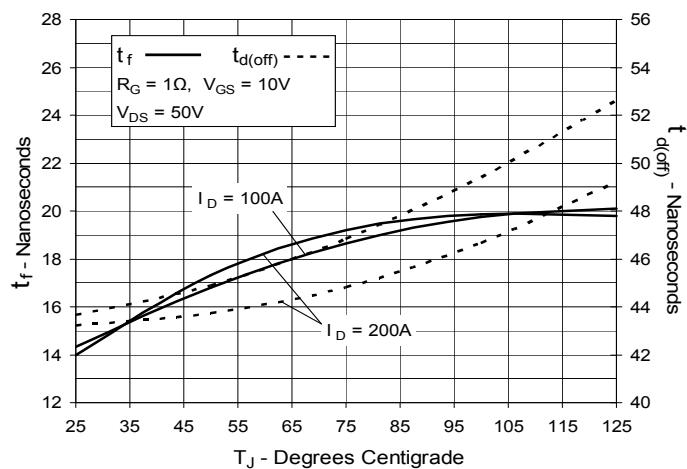

**Fig. 18. Resistive Turn-off
Switching Times vs. Gate Resistance**


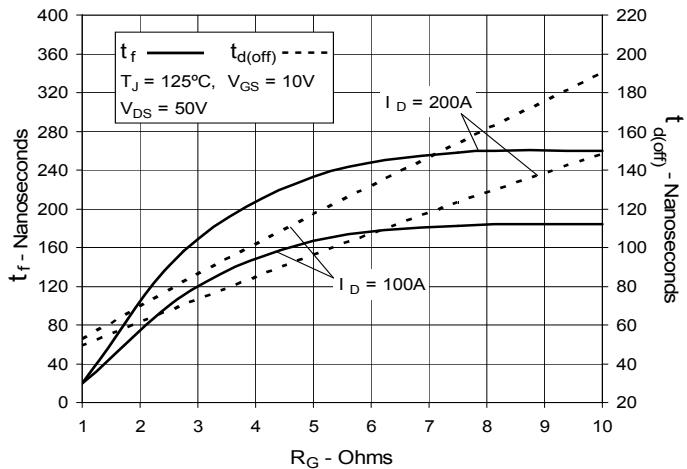


Fig. 19. Maximum Transient Thermal Impedance

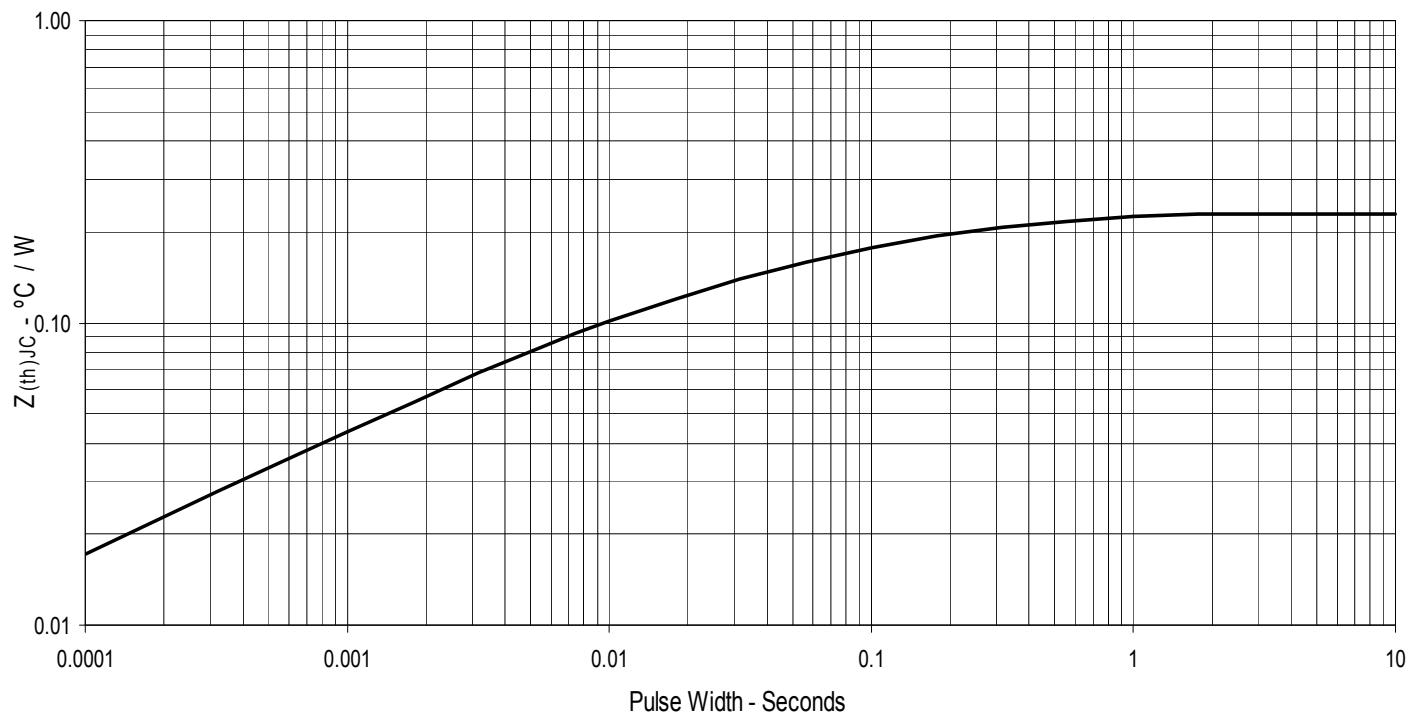

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.