

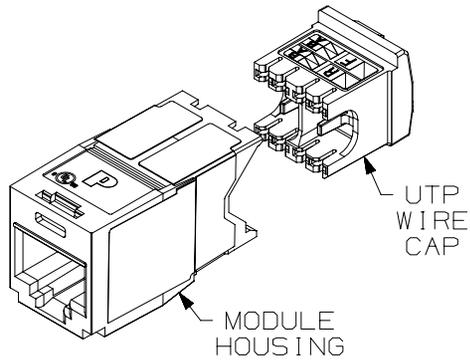
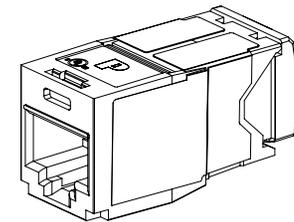


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

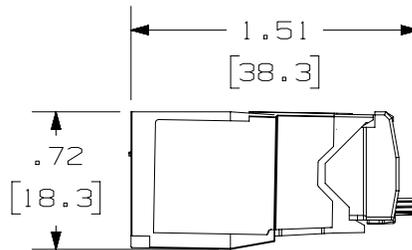

NOTES:

1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT. TO DESIGNATE A JACK COLOR, ADD A TWO LETTER COLOR SUFFIX.
2. DIMENSIONS IN [ ] ARE METRIC.
3. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
4. WEIGHT: 1.61 LB/100 PCS [ 731 g/100 PCS ]
5. PART INCLUDES:  
 1- MODULE HOUSING: UL94V-0 PC  
 1- WIRE CAP: UL94V-0 PC
6. AQUA WIRE CAP AND STRAIN RELIEF CLIP DESIGNATE 28/30 AWG CATEGORY 6A PERFORMANCE.
7. ALL CATEGORY 6A 8 POSITION, 8 WIRE CONNECTORS ARE UNIVERSAL IN DESIGN. THEY ACCEPT SIX AND EIGHT POSITION MODULAR PLUGS WITHOUT DAMAGE.



ACTUAL SIZE

PART NUMBER		<b>CJT6X88TG**</b>		
TITLE		<b>TX6A CATEGORY 6A 28/30 AWG JACK MODULE</b>		
		CUSTOMER DRAWING		
ITEM REVISION NAME		<b>00075SAU/00</b>		
DATASET FILE NAME		<b>00075SAU_DC03/00A</b>		
		THIRD ANGLE PROJECTION		
MATERIAL		SEE NOTE 5		
		DRAWING NUMBER <b>00075SAU-03</b>		
DRAWN BY		DATE	CHK	SCALE
<b>BJN</b>		<b>11-11-19</b>	<b>ROJC</b>	<b>FULL</b>
REV		DATE	BY	CHK
<b>00A</b>		<b>11-11-19</b>	<b>BJN</b>	<b>ROJC</b>
APR		DESCRIPTION	ECN	SIZE
<b>TMBA</b>		<b>RELEASED TO PRODUCTION</b>	<b>M09000KV</b>	<b>A</b>
		SHEET 1 OF 1		

A-SIZE CUSTOMER

2

1

2

1