



Parts List				
ITEM	QTY	PART NUMBER	DESCRIPTION	
1	1	F060621	LAKOAV11	
2	1	F051601	P16 PLASTIC TERM. PROTECTOR	
3	1	F050404	14V AC/DC INCANDESCENT	
4	1	F051702	25MM RING	
5	1	F061257	25MM BLU LENS	




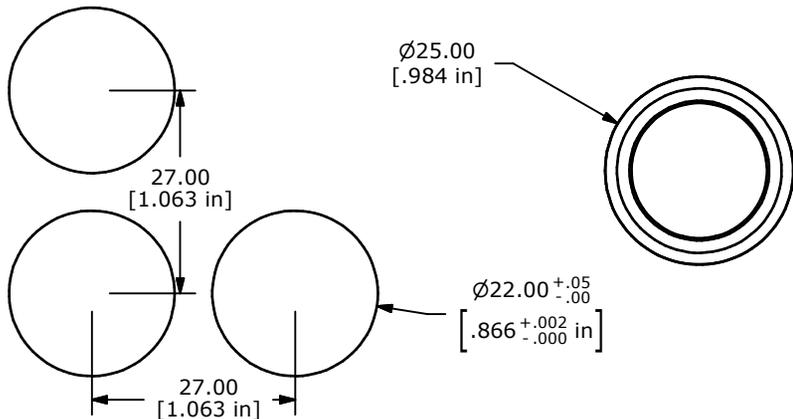


RECOMMEND PANEL MOUNTING




CONTACT CONFIGURATION

- NOTES:
- ALL DIMENSIONS IN MM [INCH].
 - GENERAL TOLERANCE: 0.0±0.4

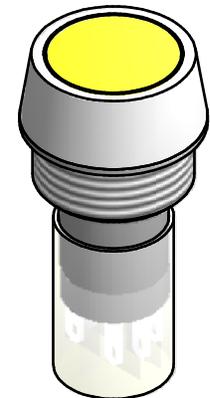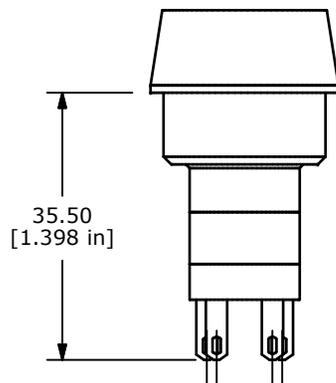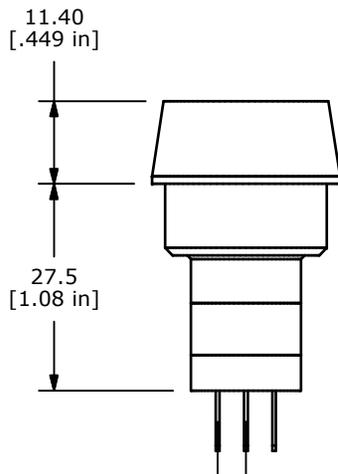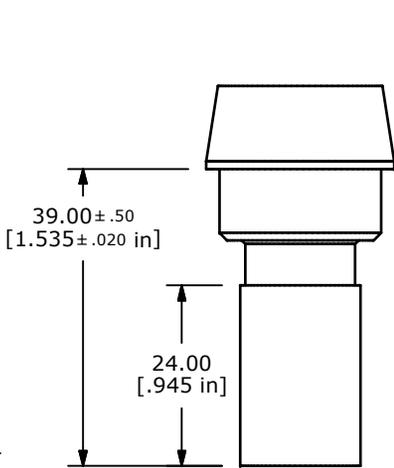

ISOMETRIC



- TERM. NOS. FOR REF. ONLY.
- RATING: 5A @250VAC
8A @125VAC
.2A @250VDC
6A @24VDC
- ELECTRIC LIFE: 50,000 MAKE-OR-BREAK CYCLES AT FULL LOAD.
- INSULATION: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 1,500V FOR 1 MIN
- OPERATING TEMP: -25°C TO 55°C
- LENS COLOR: BLUE
- LAMP VOLTAGE: 14V AC or DC (80 mA, INCANDESCENT)
- PANEL THICKNESS: 0.5 - 4 mm
- DEGREE OF PROTECTION: IP65
- 2002/95/EC (ROHS) COMPLIANT



A	18139	RELEASED FOR PRODUCTION	6/20/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE LAKOAV11BBLU				
SCALE 1:1	DATE 10/20/2006	DR BLR	DWG XF0757P	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED