

**mec**  
switches

switches



Switch Engineering Catalog No. 6

# mec Competences

Since its foundation in 1938, **mec** has been making state-of-the-art electromechanical components.

Today we are focusing on continuous innovation to maintain our position as leader in the segment of high end PCB mount push button switches. By always choosing the best possible solution, whether it is a design principle, a material or a manufacturing process we maintain and improve our sustainable high quality level. With this approach a wealth of know-how has been built up over the years for the benefit of new product development and custom solutions.

Despite the trend of outsourcing it has been the policy of **mec** to maintain a high degree of vertical integration that enables us to react promptly on specific customer requests. Only processes that are not considered core competences have been outsourced.

## **Research and Development**

Equipped with the latest CAD solutions with 3D facilities and optical simulation software our experienced R&D engineers are designing, simulating and evaluating new products and machinery continuously. The combination of a strong R&D facility and the vertical integration enables us to provide custom designs from conception to completion.

## **Automation - Tooling - Moulding - Stamping - Graphics Marking - Custom Assembly**

All switch modules are manufactured on fully automated production lines with complete in-line component tests. All production statistics are analysed and stored in computers. 98% of all parts used in the **mec** switches are produced in-house.

Ongoing investments ensure that latest technology is available for the tooling department. However, at **mec** we believe that the most important factors for maintaining a high tool standard are the outstanding skills and experience of our toolmakers.



The plastic moulding department consists of numerous moulding machines. Rigorous process control ensures the highest possible precision and reproducible quality that is essential for making precision components.

All metal parts are manufactured in our metal stamping department. When making contact elements, a computer controlled test station provides a high level of repeatability and secures that any required corrections can be made instantly.

Graphics marking is also made in-house to secure constant quality and durability of both standard and customized graphics for the many keycaps and bezels available. The assembly department offers all kinds of value-added services such as customized final assembly made by experienced and quality conscious personnel.

## **Logistics and Production Planning**

The production planning software is today fully integrated into the financial and administrative system.

The system provides the backbone that allows us to maintain precise deliveries and to offer excellent customer service.

## **Quality – Environment - RoHS**

We strive to maintain the highest possible quality standard through our QA system. With 100% in-line inspection, tight tolerance

on all parts and use of only quality material we position ourselves to reach the highest achievable.

To be a part of a sustainable industrialized world environmental consciousness is crucial. At **mec** we have been substituting materials to more environmental friendly alternatives and are recycling as much as possible. Legal authorities are auditing our environmental management system regularly and confirming that our goal is being reached.

RoHS conversion has been completed for all switches. To manage the inventory in the complete supply chain a separate part number system has been established. All parts manufactured today are RoHS compatible.

## **Sales - Customer Service - Distribution**

**mec** have a well established global distribution network that provides a presence in all parts of the world where electronic manufacturing takes place. Through close contact and continuous product training offered to our distributors we maintain a highly qualified and responsive global distribution network.

Please contact **mec** or one of our distributors if you require assistance or samples to complete your new design with **mec** switches. We welcome inquiries also for custom solutions.

# mec Switches

Colourful and reliable to complete your next design successfully



## Contents

### Selection Guide

multimec® Pushbutton switches .....	04
multimec® Pushbuttons continued .....	05
unimec™ Pushbutton switches .....	06
multimec® Switches under foil .....	07
multimec® Switches - Variable heights .....	08
multimec® Solid colour codes .....	37

### multimec® pushbutton switches

illumec™ 4A .....	09
3A + 1B/1C+2A/2B .....	10
3A + 1A/1H/1M/1ZA .....	11
Navimec™ .....	12
illumec™ 4F .....	13
3F + 1N .....	14
3F + 1D/1E/1F .....	15
3F + 1K/1KB/1KC .....	16
3F + 1WA/1WD/1WP .....	17
3F + 1P/1Q/1R .....	18
3F + 1T/1U/1V .....	19
3F + 1X .....	20
3F + 1S+2S .....	21
Aquamec™ .....	22
3F + 1GA/1GC .....	26
3C/3E switches .....	27
Varimec™ - Double variability - round .....	28
Varimec™ - Double variability- square .....	29
Right angle switches 3C/3E/3F .....	30
3F Right angle switches with keycaps .....	31
Legends .....	23

### Technical information multimec®

Basic switch modules .....	32
Basic switches continued and tape & reel .....	33
Spacing .....	34
Technical specifications .....	35
LEDs .....	36

### unimec™ pushbutton switches

16.324-16.326 .....	38
16.310-16.315 .....	39
16.300/16.700/16.800 .....	40
Vario Support .....	41
Legends .....	42
unimec™ with multimec® keycaps .....	43

### Technical information unimec™

Basic switch modules .....	44
Technical specifications + LEDs .....	45

### Applications

Applications for inspiration .....	24
Applications for inspiration .....	25

### General information

Competences .....	02
Usage guidelines .....	46
Custom products .....	47

# multimec® PCB Mount Pushbutton Switches

mec specializes in the production of PCB mounted pushbutton switches. Our products are designed to be used in a wide variety of applications. Through the use of a modular approach to switch assembly the user is provided with a unique flexibility in his choice of options. multimec® switches are known for their crisp audible tactile feel although a "quiet" model is available for sensitive applications such as audio and conference equipment.


The multi-coloured keycaps, bezels and LEDs snap together to produce almost unlimited switch configurations. Customized keycaps and bezels can be manufactured for special applications.



		3A/4A Switches					Caps and Bezels		Page
		Pushbutton		Illuminated					
		TH	SMD	TH	SMD				
3AT	3AS	3AT	4AT	4AS					
X	X						1M	1ZA	11
		X	X	X			1H		11/09
							1C + 2A/2C		10/09
X	X	X	X	X			1A		11/09
							1B + 2A/2C		10/09
							1B + 2B/2D + 2B LED		10/09
		3C/3E Switches					Caps and Actuators		Page
		Pushbutton							
		TH		SMD					
3CT	3ET	3CS	3ES						
X		X							27
		X			X				
		Navimec™ Switches					Caps		Page
		Pushbutton		Illuminated					
		TH		TH	SMD				
3AT	3FT	3AS	4FT	4FS					
X	X	X	X	X			1ZB		12/13
							1ZC		

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.

# multimec® PCB Mount Pushbutton Switches

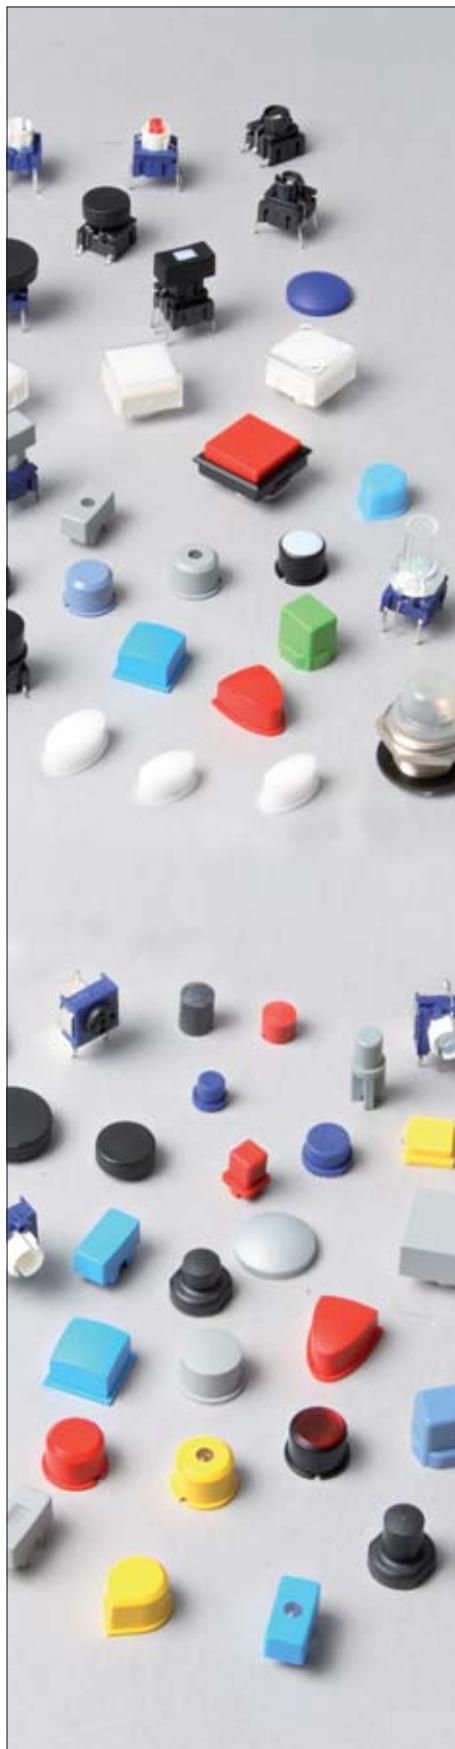

3F/4F Switches					Caps and Bezels	Page
Pushbutton		Illuminated				
TH	SMD	TH	SMD			
3FT	3FS	3FT	4FT	4FS		
X	X				1GA    1GC 1P 1ZC 1K +  2K	26 18 12 16
		X	X	X	1K  1KB  1KC  2K 1Q  1R	16/13 18/13
X	X	X	X	X	1D  1E  1F 1N 1S 1T  1U  1V 1X AQN  AQC  AQB01 1WA  1WD  1WP	15/13 14/13 21/13 19/13 20/13 22/13 17/13
Right Angle Switches					Caps and Actuators	Page
Pushbutton		Illuminated				
Through-hole						
3CTRAS	3ETRAS	3FRAS	3FRAS w/LED			
X						30
	X					30/27
		X				30/28
						30/29
			X		1GA  1GC 1P 1ZC 1K +  2K 1T  1U  1V 1S	31/26 31/18 31/12 31/16 31/19 31/21
				X	1D  1E  1F 1Q  1R 1S 1N 1X	30/31/15 30/31/18 30/31/21 30/31/14 30/31/20

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.

# unimec™ PCB Mount Pushbutton Switches

This switch range is one of the smallest two pole switches available today. The contacts are capable of producing eight functions depending on the PCB layout. The unimec™ switch is available in momentary and alternate action models with standard silver contacts or optional gold contacts for low level switching. All unimec™ switches are available in low or high temperature models.



Switches Low. Temp.	Switches High Temp.	Caps and Bezels	Page
 15.500		Silent silver  16.300 + 16.310	39
	 15.420	Silent gold  16.300 + 16.311 + 16.920	39
 15.501	 15.401	Momentary silver  16.300 + 16.312 + 16.921	39
 15.502	 15.402	Momentary gold  16.300 + 16.314 + 16.920 + 16.921	39
 15.551	 15.451	Alternate silver  16.300 + 16.315 + 2x16.920/16.921	39
 15.552	 15.452	Alternate gold  16.270 + 16.300 + 16.324	38
		 16.270 + 16.300 + 16.325 + 16.327 + 16.922	38
		 16.270 + 16.300 + 16.326 + 2x16.327/16.922	38
		 16.700	40
		 16.800	40
		 16.300	40
		 Vario Support 1x1 to 10x10	41
		 Legends for 16.300 + 16.700	42

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.

# multimec® Switches Under Foil

The use of multimec® under a foil overlay offers an attractive alternative to the traditional membrane switch. With a mechanical life of 10 million cycles, multimec® will outperform membrane switches under the most extreme conditions. multimec® switches can be specified with LED illumination to provide back lighting of the overlay for front panel applications. While mec does not manufacture foil overlays, our local distributors can help you locate sources of supply.





	Switches	Caps and Actuators	Overall Height (mm)	Diameter (mm)	Page
	3CTL6 3CTH9		6.4	6.5	27
	3CSH9				
	3ETL9 3ETH9	    	08.0-15.0	6.5	27
	3ESH9				
	3FTL6 3FTH9	 1GA   1GC +	12.5	11.0	26
	3FSH9	 2S (optional)	17.5-22.5		
	3ETL 3ETH	  	10.4-22.5	5.2 7.8 11.6 Square 5.2 x 5.2 7.8 x 7.8 11.6 x 11.6	28
	3ESH	  			29
	3FTL6 3FTH9	 1D	14.9	9.6	15/13
	3FSH9	 1K	19.1	14.3x14.3	26/13
	3FTL6 w/LED	 1S	16-22.5	6.5	21/13
	4FTH9 w/LEDs	 1T	14.9	10.6x10.6	19/13
	4FSH9 w/LEDs	 1U	14.9	10.6	19/13

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.

# multimec® Variable height switches

mec is probably the most flexible switch manufacturer worldwide when it comes to fulfilling customers' specific height requirements. This selection guide on variable height switches is giving a simple overview of the many height options the multimec® switch line can offer and how to overcome the problems with adapting building heights.

Switches	Caps and Actuators	Overall Height (mm)	Diameter (mm)	Page
 3CTL6 3CTH9	White – Black	6.4	6.5	27
 3CSH9				
 3ETL9 3ETH9		08.0 09.5 10.4 11.0 12.0 15.0	6.5	27
 3FSH9	Blue – Grey – Yellow – Red – Black			
 3FTL6 3FTH9		12.5	11.0	26
 3FSH9		17.5-22.5 in steps of 1 mm	15.0	
 3ETL 3ETH				28
 3ESH	 Blue – Grey – Yellow – Red – Black	10.4-22.5 <b>Double Variability</b> Above recess: 2.4-6.4 Below recess: 0-8.1	5.2 7.8 11.6 <b>Square</b> 5.2x5.2 7.8x7.8 11.6x11.6	29
 3FTL6 3FTH9		16.0 19.0 22.5	6.5	21
 3FSH9		21.0-32.5 in steps of 1 mm		
 3FTL6 w/LED		16.0 19.0 22.5	6.5	21/13
 4FTH9 w/LEDs				
 4FSH9 w/LEDs		21.0-32.5 in steps of 1 mm		

The size of the switches, caps, actuators and bezels listed may not correspond to the actual size.


# multimec® illumec™ 4A

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
high temp. switch: -40/+160°C  
LED: -30/+85°C




## Dimensions (through-hole)

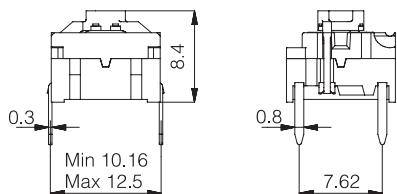


## Top View



## Dimensions (SMD)

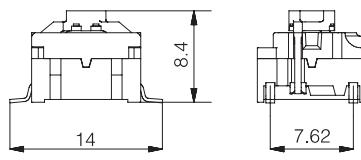


## Top View





## PCB layout and Circuit Diagram

### 1 LED




### 2 LEDs





## PCB layout and Circuit Diagram

### 1 LED



### 2 LEDs



Technical specifications for 4A switch and LEDs see pages 35 and 36

## How to order

**4 A**

+

### Switch Mounting

SH9 surface mount  
TH9 through-hole

### LED

### Illuminated Cap

- |      |                          |                   |
|------|--------------------------|-------------------|
| 01   |                          | 1A 10,12,14,16,18 |
| 22   |                          | 1B 10,12,14,16,18 |
| 42   |                          | 10.16             |
| 61   |                          | 7.62              |
| 82   |                          | Max.10.3          |
| 2242 | <input type="checkbox"/> | Cap               |
| 8222 | <input type="checkbox"/> | Solid Colour      |
| 8242 | <input type="checkbox"/> | Illuminated Lens  |

- +   or     
**Bezel** **Solid Colour** **Bezel** **Solid Colour** **Bezel** **Solid Colour** **Bezel** **Illuminated Lens**

1H Solid Colour + lens 1,2,4,6,8

1C Solid Colour + lens 1,2,4,6,8 +   or     
**Bezel** **Solid Colour** **Bezel** **Solid Colour** **Bezel** **Solid Colour** **Bezel** **Illuminated Lens**

## Colour codes

LEDs	Illuminated Caps	Lenses
01 blue	10 frosted blue	1 transparent
22 green	11 transparent	2 green
42 yellow	12 frosted green	4 yellow
61 white	14 frosted yellow	6 frosted white
82 red	16 frosted white	8 red
2242 green/yellow	18 frosted red	
8222 red/green		
8242 red/yellow		

## Solid Colours Caps and Bezels

For 1A, 1B and 2C only:		
00 blue	30 ultra blue	50 metal dark blue
02 green	40 dusty blue	53 metal light grey
03 grey	42 aqua blue	57 metal dark grey
04 yellow	32 mint green	58 metal bordeaux
06 white	33 tele grey	
08 red	34 melon	
09 black	38 noble red	

## Dimensions

Caps	See Page
1A - 1H	11
1B - 1C	10
2C - 2D	
Same as for 2A/B	10

**Ordering example:** 4ASH982 + 1A18 or 4ATH901 + 1B10 + 2C09

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)



# multimec® 3A + 1A/1H/1M/1ZA

## Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C



Dimensions (through-hole) 1A	Dimensions (w/LED) 1H	Dimensions (SMD) 1ZA	Dimensions (SMD) 1M
<b>PCB layout</b> 	<b>PCB layout (top view)</b> 	<b>PCB layout</b> 	<b>PCB layout</b> 

## How to order

<b>3 A</b> Switch	<input type="checkbox"/>	<input type="checkbox"/>	<b>+ 1 A</b> Cap	<input type="checkbox"/>	00 blue 02 green 03 grey 04 yellow 06 white 08 red 09 black	30* ultra blue 40* dusty blue 42* aqua blue 32 mint green 33 tele grey 34 melon 38 noble red	50* metal dark blue 53* metal light grey 57* metal dark grey 58* metal bordeaux
*) Colours for 1ZA							

<b>3 A</b> Switch	<input type="checkbox"/>	<input type="checkbox"/>	<b>+ 1 M</b> Cap	<input type="checkbox"/>	00 blue 02 green 03 grey 04 yellow 06 white 08 red 09 black	
*) Colours for 1M						

<b>3 A</b> Switch	<b>T</b> Mounting	<input type="checkbox"/>	<b>+ 1 H</b> Cap	<input type="checkbox"/>	00 blue 02 green 03 grey 04 yellow 06 white 08 red 09 black	<input type="checkbox"/>	<b>Lens</b>
*) Colours for 1H							

Keycaps shown on this page can also be used on  
illumec™ switch 4A - see page 9


**Ordering example:** 3ATL680 + 1H098

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)




# multimec® Navimec™

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C

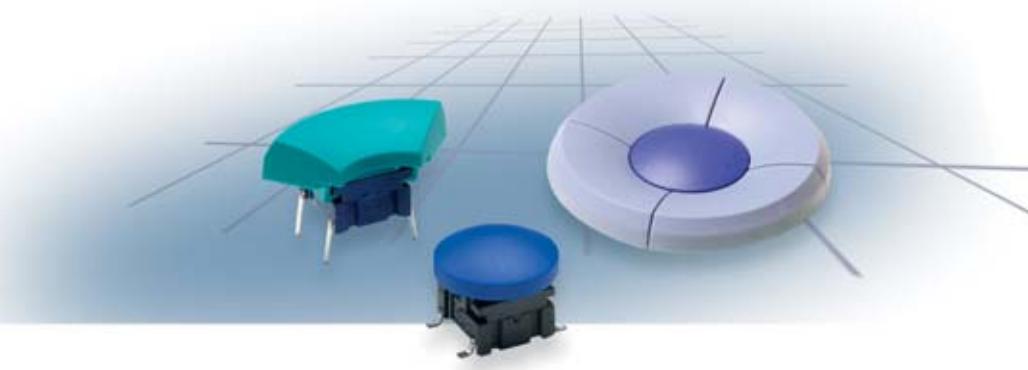



### Dimensions 1ZB (through-hole)




PCB layout



### Dimensions 1ZC (SMD)




PCB layout




### Recommended panel cut-out:

Ø35.0-35.5 Depending on application

### PCB layout TH



### PCB layout SMD



### How to order

**3 A**

**Switch**      **Mounting**  
T through-hole    S surface mount



**L 6** low temp.  
**H 9** high temp.

**Cap 1ZB**



**03** grey

**06** white

**09** black

**30** ultra blue

**40** dusty blue

**42** aqua blue

**50** metal dark blue

**53** metal light grey

**57** metal dark grey

**58** metal bordeaux

**3 F**

**Switch**      **Mounting**  
T through-hole    S surface mount



**L 6** low temp.  
**H 9** high temp.

**Cap 1ZC**



### Navimec™ Module

**Part No. 9508000**

**Navimec™ Module excl. keycaps**

**Part No. 950XXYY**

**Navimec™ Module incl. keycaps**

**Part No. 9509XXXXYY**

**Navimec™ Module incl. keycaps with legends**

The module can be delivered with keycaps (4 x 1ZB and 1 x 1ZC) in solid colours or black keycaps with white legends.


For module incl. keycaps in solid colours (950XXYY) please indicate colour code for 1ZBXX and colour code for 1ZCYY.

For module incl. keycaps with legends (9509XXXXYY) please indicate legends for 1ZBXXX and legends for 1ZCYYY. All Caps are black with white legends. Please see legends available on page 23.

**Examples:** Module with 5 switches (4x3ATL6+1x3FTL6) mounted with 4x1ZB30 ultra blue and 1x1ZC42 aqua blue = 9503042.

Module with 5 switches (4x3ATL6+1x3FTL6) mounted with 4x1ZB09XD136 (legend arrow) and 1x1ZC09118 (legend OK) = 9509136118.


### Dimensions Navimec™ Module

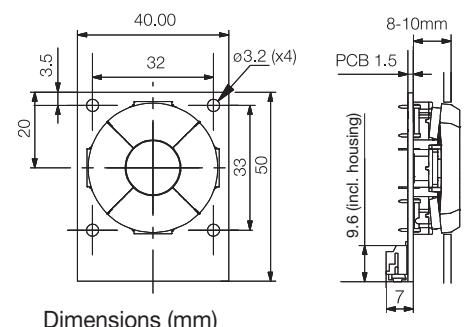

Dimensions (mm)

### Circuit Diagram Navimec™ Module

(Front side View)

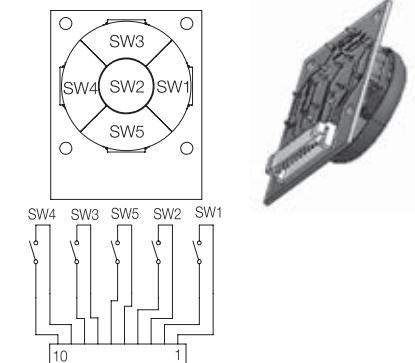

The plug on the Navimec™ module is JST SMT S10B-PH-SM3-TB or similar.

We recommend using

Cable socket: JST PHR-10 or similar

Contact: JST SPH-002T-PO.5S or similar.

**Ordering example:** 4x3ATL6+1ZB53 and 1x3FTL6+1ZC58 or Navimec™ Module 9505358


# multimec® illumec™ 4F

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
high temp. switch: -40/+160°C  
LED: -30/+85°C




## Dimensions (through-hole)

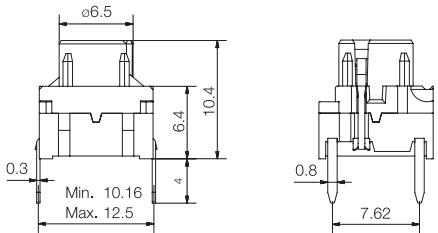


## Top View



## Dimensions (SMD)

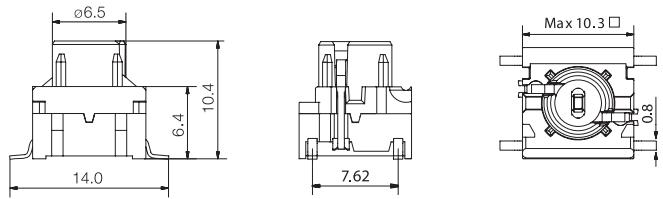


## Top View





## PCB layout and Circuit Diagram

### 1 LED




### 2 LEDs





## PCB layout and Circuit Diagram

### 1 LED



### 2 LEDs



Technical specifications for 4F switch and LEDs see pages 35 and 36

## How to order

**4 F**   

+

**Switch**   **Mounting**  
SH9 surface mount  
TH9 through-hole

**LED**   **Illuminated Cap**

01

22

42

61

82

2242

8222

8242



**1D**

1K,1KB,1KC

**1N**

**1S**

**1T**

**1U**

**1V**

1WA,1WD,1WP

**1X**

## Colour code

11,16



**Cap**



**Solid Colour**



**Illuminated Lens**



**1E**

**Solid Colour + lens**

1,2,4,6,8



**1F**

**Solid Colour + lens**

1,2,4,6,8



**1Q**

**Solid Colour + lens**

1,6



**1R**

**Solid Colour + lens**

1,6

## Colour codes

### LEDs

- 01 blue
- 22 green
- 42 yellow
- 61 white
- 82 red
- 2242 green/yellow
- 8222 red/green
- 8242 red/yellow

### Illuminated Caps

- 10 frosted blue
- 11 transparent
- 12 frosted green
- 14 frosted yellow
- 16 frosted white
- 18 frosted red

### Lenses

- 1 transparent
- 2 green
- 4 yellow
- 6 frosted white
- 8 red

## Solid Colours

- |              |              |
|--------------|--------------|
| <b>1E,1F</b> | <b>1Q,1R</b> |
| 00 blue      | 00 blue      |
| 02 green     | 03 grey      |
| 03 grey      | 08 red       |
| 04 yellow    | 09 black     |
| 06 white     |              |
| 08 red       |              |
| 09 black     |              |

## Dimensions

- |             |                 |
|-------------|-----------------|
| <b>Caps</b> | <b>See Page</b> |
| 1D,1E,1F    | 15              |
| 1K,1KB,1KC  | 16              |
| 1N          | 14              |
| 1Q,1R       | 18              |
| 1S          | 21              |
| 1T,1U,1V    | 19              |
| 1WA,1WD,1WP | 17              |
| 1X          | 20              |

Ordering example: 4FSH98242 + 1D11 or 4FTH922 + 1T16

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)


# multimec® 3F + 1N

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




### Dimensions (through-hole)

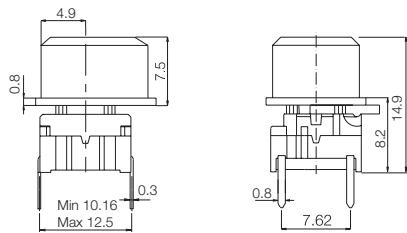


PCB layout

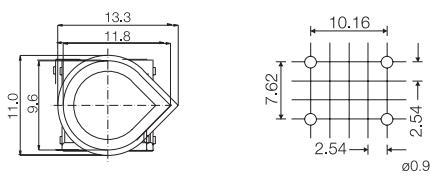


### Dimensions (w/LED)

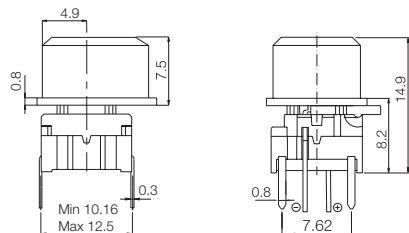


PCB layout (top view)

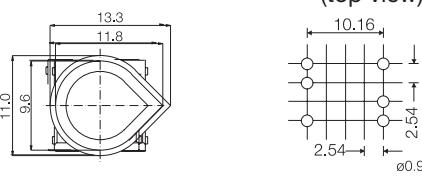


### Dimensions (SMD)

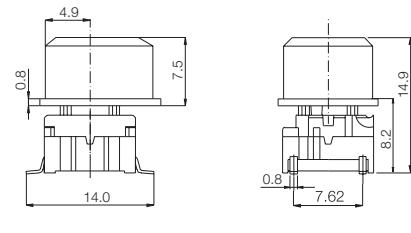

PCB layout



### 8 different position options

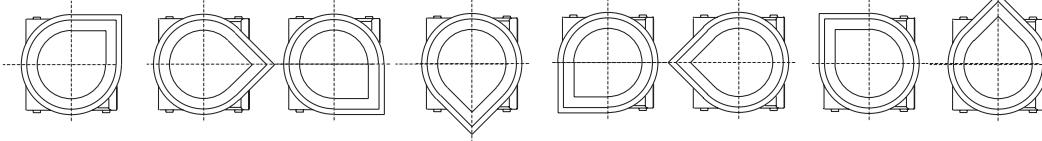

### How to order

**3 | F**

Switch

Mounting  
T through-hole  
S surface mount

L 6 low temp.  
H 9 high temp.

+

**1 | N**

Cap

00 blue  
03 grey  
04 yellow  
08 red  
09 black

**3 | F**

Switch

**T**

Mounting  
T through-hole

L 6 low temp.  
H 9 high temp.

LED  
00 blue  
20 green  
40 yellow  
60 white  
80 red  
2040 green/yellow  
8020 red/green  
8040 red/yellow

**1 | N**

Cap

10 frosted blue  
12 frosted green  
14 frosted yellow  
16 frosted white  
18 frosted red

Keycaps shown on this page can also be used on  
illumec™ switch 4F - see page 13

**Ordering example:** 3FTL6 + 1N09 or 3FTL680 + 1N18

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)



# multimec® 3F + 1K/1KB/1KC

## Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C



Dimensions 1K (through-hole)	Dimensions 1KB (w/LED)	Dimensions 1KC (w/LED)	Dimensions 1K (SMD)	Dimensions (Bezel) (Optional)
Dimensions: Height 19.1, Width 14.3, Depth 0.3. Pin spacing: Min. 10.16, Max. 12.5. PCB layout: Pad width 7.62, Pad center-to-center 10.16, Pad height 2.54, Pad center-to-hole 2.54, Hole diameter Ø 0.9.	Dimensions: Height 19.1, Width 14.3, Depth 0.3. Pin spacing: Min. 10.16, Max. 12.5. PCB layout: Pad width 7.62, Pad center-to-center 10.16, Pad height 2.54, Pad center-to-hole 2.54, Hole diameter Ø 0.9. Note: R18.75 is indicated at the top of the PCB layout diagram.	Dimensions: Height 19.1, Width 14.3, Depth 0.3. Pin spacing: Min. 10.16, Max. 12.5. PCB layout: Pad width 7.62, Pad center-to-center 10.16, Pad height 2.54, Pad center-to-hole 2.54, Hole diameter Ø 0.9. Note: R25 is indicated at the top of the PCB layout diagram.	Dimensions: Height 19.1, Width 14.3, Depth 0.3. Pin spacing: Max. 0.05. PCB layout: Pad width 7.62, Pad center-to-center 10.16, Pad height 2.54, Pad center-to-hole 2.54, Hole diameter Ø 0.9.	Dimensions: Height 17.75, Width 14.6, Depth 2.1.
<b>PCB layout</b>	<b>PCB layout (top view)</b>	<b>PCB layout (top view)</b>	<b>PCB layout</b>	<b>PCB layout</b>

## How to order

<b>3   F</b>	<input type="checkbox"/>	<b>Mounting</b>	<input type="checkbox"/>	<b>L 6</b> low temp.	<b>+</b>	<b>1   K</b>	<b>1   6</b>	<b>Cap</b>	<b>00</b> blue	<b>+</b>	<b>2   K</b>	<input type="checkbox"/>	<b>Bezel</b>	<b>03</b> grey	
<b>Switch</b>	<input checked="" type="checkbox"/>	<b>T</b> through-hole	<input type="checkbox"/>	<b>H 9</b> high temp.					<b>02</b> green			<input type="checkbox"/>	<b>06</b> white	<b>08</b> red	<b>09</b> black

<b>3   F</b>	<input type="checkbox"/>	<b>Mounting</b>	<input type="checkbox"/>	<b>L 6</b> low temp.	<b>+</b>	<b>1   1   1   6</b>	<b>+</b>	<b>2   K</b>	<input type="checkbox"/>					
<b>Switch</b>	<input checked="" type="checkbox"/>	<b>T</b> through-hole	<input type="checkbox"/>	<b>H 9</b> high temp.		<b>LED</b>	<b>frosted white</b>				<b>03</b> grey	<b>06</b> white	<b>08</b> red	<b>09</b> black

The 1K caps consist of a transparent lid and a diffuser lens.  
It is possible to make your own customized legend by placing a foil between the lid and the lens.


Keycaps shown on this page can also be used on  
illumecc™ switch 4F - see page 13

**Ordering example:** 3FTL688 + 1K1116


# multimec® 3F + 1WA/1WD/1WP

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C

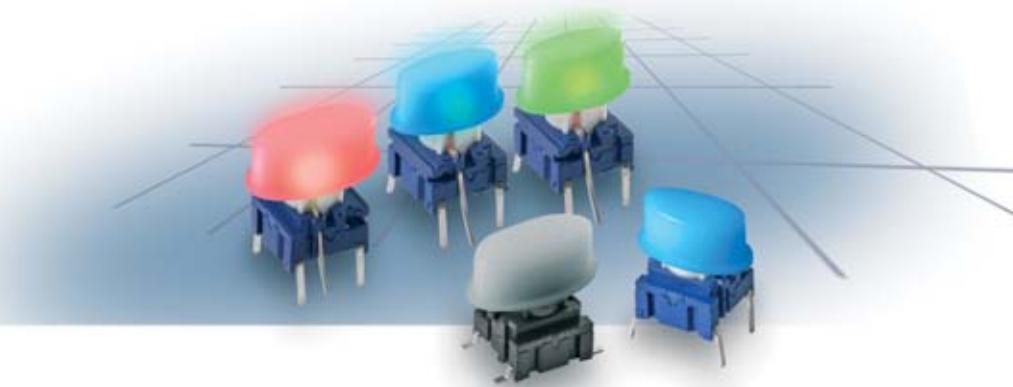


## Dimensions (through-hole) 1WA

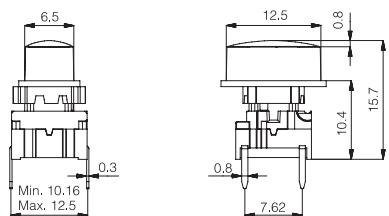


## PCB layout

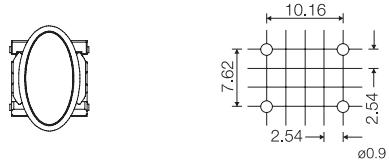


## Dimensions (w/LED) 1WD

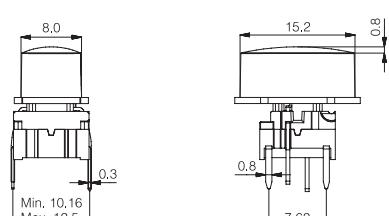


## PCB layout (top view)




## Dimensions (SMD) 1WP

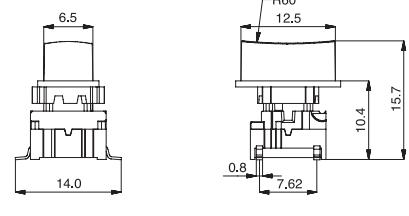

## PCB layout



## 8 different position options



## How to order

**3 | F**



**Switch**

**Mounting**

T through-hole  
S surface mount



**L 6** low temp.  
**H 9** high temp.

+



**Cap**

**1WA**



**00** blue

**03** grey

**08** red

**09** black

**30** ultra blue

**40** pigeon blue

**42** aqua blue

**53** metal light grey

**57** metal dark grey

**3 | F**



**Switch**

**Mounting**

T through-hole



**L 6** low temp.  
**H 9** high temp.

+



**Cap**

**1WA**



**16** frosted white



**1WD**

**1WP**

Keycaps shown on this page can also be used on  
illumec™ switch 4F - see page 13


**Ordering example:** 3FTL6 + 1WA09 or 3FTL680 + 1WP16

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)


# multimec® 3F + 1P/1Q/1R

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C

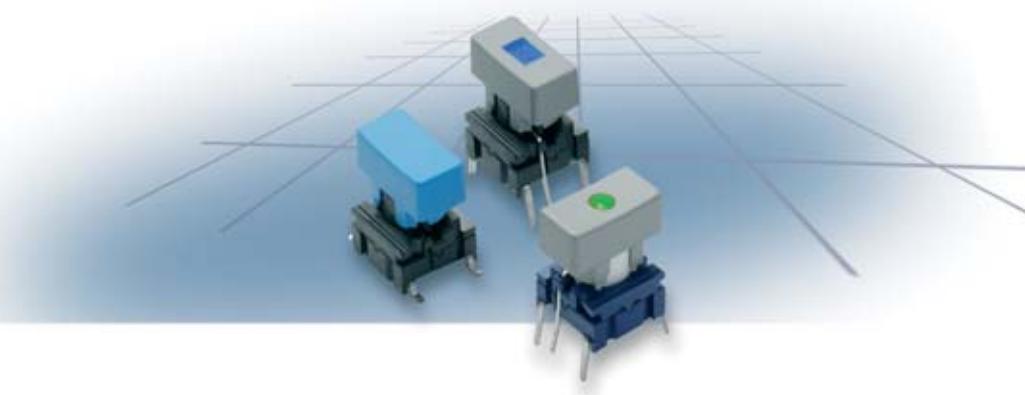


## Dimensions (through-hole)

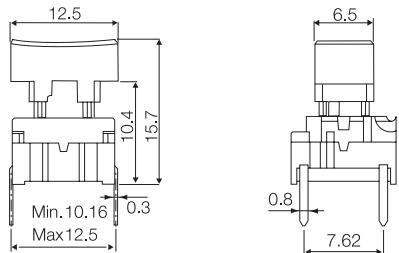


## Dimensions (w/LED)

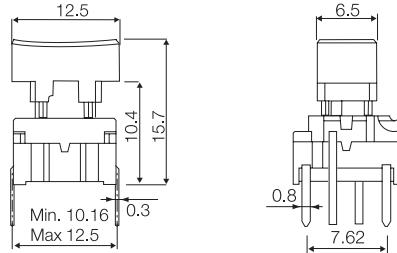


## Dimensions (SMD)

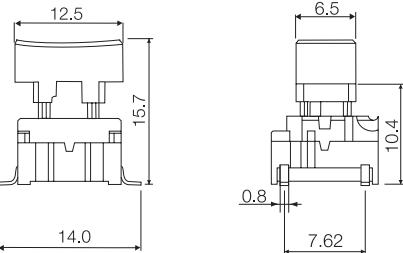


## PCB layout

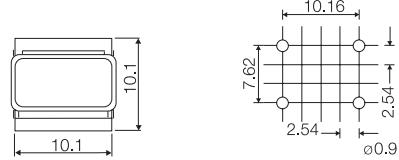

## PCB layout (top view)



## PCB layout



## How to order

3F

Switch

Mounting

T through-hole  
S surface mount

L 6 low temp.  
H 9 high temp.

+

1P

Cap



00 blue  
02 green  
03 grey  
04 yellow  
06 white  
08 red  
09 black

3F

Switch

T

Mounting

T through-hole

L 6 low temp.  
H 9 high temp.

+

1Q



00 blue  
03 grey  
08 red  
09 black

Lens  
1 transparent  
6 frosted white

Keycaps shown on this page can also be used on  
illumec™ switch 4F - see page 13


**Ordering example:** 3FTL680 + 1Q091

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)



# multimec® 3F + 1T/1U/1V

## Technical Data



- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C

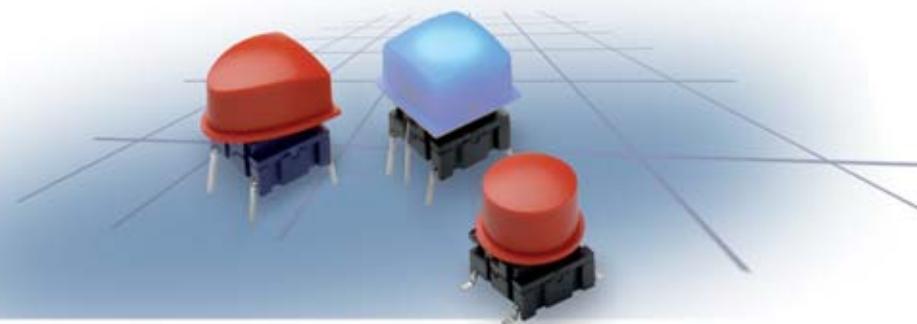



## Dimensions (through-hole)





## Dimensions (w/LED)




## Dimensions (SMD)





## PCB layout



## PCB layout (top view)



## PCB layout



## How to order

**3 | F**



**Switch**

**Mounting**

**T** through-hole  
**S** surface mount



**L 6** low temp.  
**H 9** high temp.

+



**Cap**



**00** blue

**03** grey

**08** red

**09** black



**3 | F**



**Switch**

**Mounting**

**T** through-hole



**L 6** low temp.  
**H 9** high temp.



**LED**

**23** green  
**45** yellow  
**88** red

+



**Cap**



**16**

frosted white



Keycaps shown on this page can also be used on  
illumec™ switch 4F - see page 13

**Ordering example:** 3FTL645 + 1V16

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)


# multimec® 3F + 1X

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




## Dimensions (through-hole)

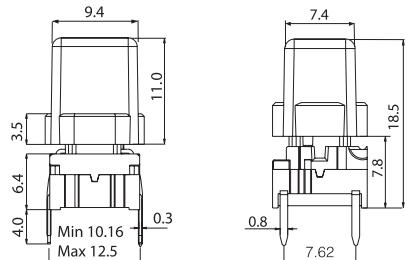


## Dimensions (w/LED)

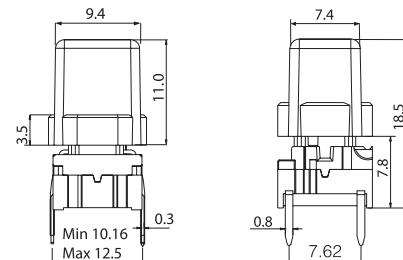


## Dimensions (SMD)

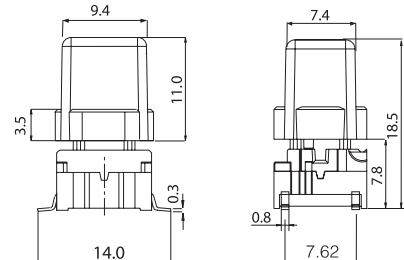


## PCB layout

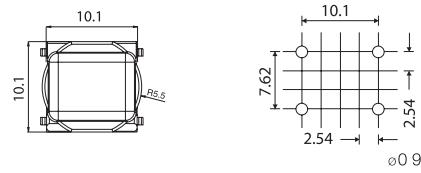

## PCB layout (top view)



## PCB layout



## How to order

**3 | F**



**Switch**

**Mounting**  
**T** through-hole  
**S** surface mount



+

**1 | X**



**Cap**



**00 blue**  
**02 green**  
**03 grey**  
**04 yellow**  
**06 white**  
**08 red**  
**09 black**

**30 ultra blue**  
**40 dusty blue**  
**42 aqua blue**  
**32 mint green**  
**33 tele grey**  
**34 melon**  
**38 noble red**

**50 metal dark blue**  
**53 metal light grey**  
**57 metal dark grey**  
**58 metal bordeaux**

**3 | F**




**Switch**

**Mounting**  
**T** through-hole



**L** 6 low temp.  
**H** 9 high temp.



+

**1 | X**

**Cap**



**11 transparent**  
**16 frosted white**

**LED**

**00 blue**  
**20 green**  
**40 yellow**  
**60 white**  
**80 red**  
**2040 green/yellow**  
**8020 red/green**  
**8040 red/yellow**

Keycaps shown on this page can also be used on  
illumec™ switch 4F - see page 13

**Ordering example:** 3FTL6 + 1X09 or 3FTL680 + 1X11

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)


# multimec® 3F + 1S + 2S

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




## Dimensions (through-hole)

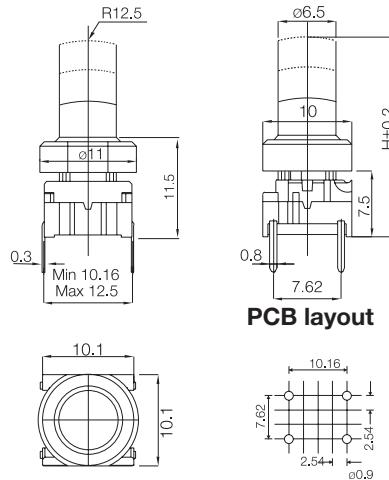

## Dimensions (w/LED)

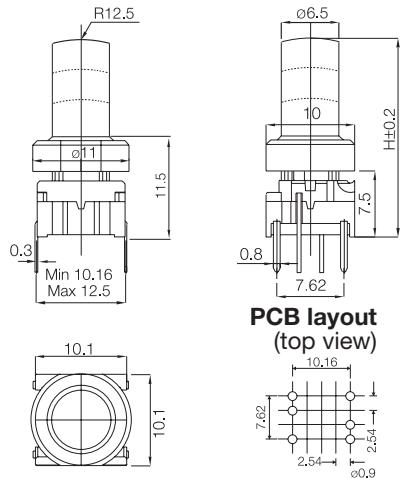

## Dimensions (SMD)

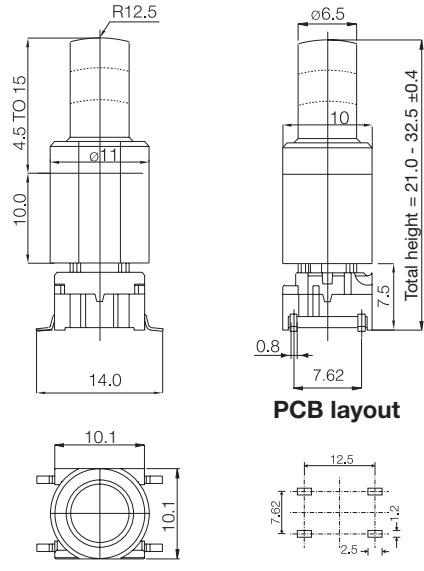

## How to order

**3 | F**

**Switch**



**Mounting**

T through-hole  
S surface mount



**L 6 low temp.**  
**H 9 high temp.**

+

**1 | S | 0 | 9 | - | . | . |**

**Cap black**

**Height**  
16.0  
19.0  
22.5



**2 | S | 0 | 9 | - | . | . | 0**

**Extender black**

**Height**  
05.0 (Optional)  
06.0 Adds 5-10mm to  
07.0 total height  
08.0  
09.0  
10.0



**3 | F**

**Switch**



**Mounting**

T through-hole



**L 6 low temp.**  
**H 9 high temp.**

+

**1 | S | 1 | 1 | - | . | . |**

**Cap Transparent**

**Height**  
16.0  
19.0  
22.5



## Customised Heights:

3F+1S is available in any height from 12.0 to 24 mm.

3F+1S+2S is available in any height from 17.0 to 34 mm.

Min. height for 1S11 is 16.0 and for 1S09 min height is 12.0 mm.

Min. order qty. for custom heights is 2.000 pcs.

For heights less than 12.0 mm, please refer to 3E switch range.

Keycaps shown on this page can also be used on  
**illumec™ switch 4F - see page 13**

**Ordering example:** 3FTL640 + 1S11-19.0


# multimec® Aquamec™

**Specifications switches:**

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range: low temp: -40/+115°C  
high temp: -40/+160°C

**Specifications Sealing Boot:**

- Operating temperature: -40/+85°C
- IP67 sealing
- sealing life time: 2.000.000 operations
- material: silicone

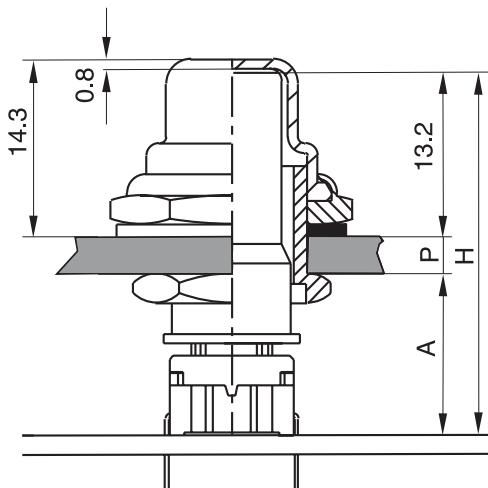

$$H = A + P + 13.2$$

This leaves nominal 0.3 mm clearance between the top of the cap and the inner side of the sealing boot to accomplish assembly tolerances. **A** can be chosen between 10 - 13 mm, we recommend 10 mm to reduce building height and optimize cap guidance.

<b>A</b>	<b>P</b>	<b>CAP</b>	<b>H</b>	<b>BUSHING</b>
10.0	1.0	AQCXX-24.2	24.2	AQN-0.5
10.0	2.0	AQCXX-25.2	25.2	AQN-0.5
10.0	3.0	AQCXX-26.2	26.2	AQN-2.5
10.0	4.0	AQCXX-27.2	27.2	AQN-2.5

Cap is available in black (09) or transparent (11).

The dimension **H** is the overall height of the switch+cap.

Bushing AQN-0.5 accepts panel thickness (P) 0.5-2.5 mm.

Bushing AQN-2.5 accepts panel thickness (P) 2.5-4.0 mm.

Panel cut out  $\varnothing 12.0 \pm 0.2$ .

**How to order**

**3 | F**         +  
**Switch**    **Mounting**  
 T through-hole      L 6 low temp.  
 S surface mount      H 9 high temp.

<b>AQN</b> - <input type="checkbox"/> . <input type="checkbox"/>	+ <b>AQC</b> <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> . <input type="checkbox"/> + <b>AQB01</b> <input type="checkbox"/> <input type="checkbox"/>			
<b>Bushing</b>	<b>Panel</b>	<b>Cap</b>	<b>Overall Height</b>	<b>Sealing boot, incl. sealing ring</b>
	0.5 2.5	09 black 11 transparent	24.2 25.2 26.2 27.2	09 black 11 transparent

**3 | F** **T**        + **AQN** -  .  + **AQC**   -  .  + **AQB01**    
**Switch**    **Mounting**  
 T through-hole      L 6 low temp.  
 H 9 high temp.

**LED**  
 00 blue  
 20 green  
 40 yellow  
 60 white  
 80 red  
**2040** green/yellow  
**8020** red/green  
**8040** red/yellow

<b>AQN</b> - <input type="checkbox"/> . <input type="checkbox"/>	+ <b>AQC</b> <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> . <input type="checkbox"/> + <b>AQB01</b> <input type="checkbox"/> <input type="checkbox"/>			
<b>Bushing</b>	<b>Panel</b>	<b>Cap</b>	<b>Overall Height</b>	<b>Sealing boot, incl. sealing ring</b>
	0.5 2.5	11 transparent	24.2 25.2 26.2 27.2	11 transparent

Keycaps shown on this page can also be used on  
**illumec™** switch 4F - see page 13

**Ordering example:** AQB0109 + AQC09-27.2 + AQN-2.5 + 3FTL6

# multimec® Legends





All standard legends are white on black caps.

The size of the legends listed may not correspond to the actual size. Please ask your local distributor, if you do not find what you need on the list. New legends may have been added after this catalogue was printed.


Custom legends and other colour combinations are available, please contact your local distributor.

#### Note!

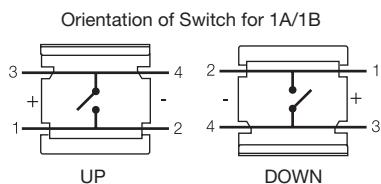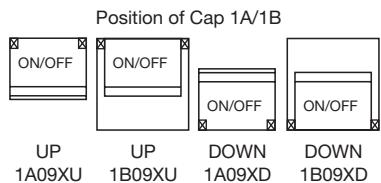

For 1A/1B the orientation shown above is standard.

Please consider the switch orientation you require before specifying legend orientation.

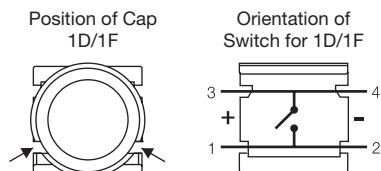

For the 1D and 1F caps the orientation shown above is standard.

Please consider the switch orientation you require before specifying legend orientation.

## Standard Keycap Legends

Part no.



LEGEND 1A09XU\_ 1A09XD\_ 1B09XU\_ 1B09XD\_ 1D09\_ Reverse Print 1F096\_ 1ZB09XD\_ 1ZC09\_


0	000	000	000	000	000	000			
1	001	001	001	001	001	001			
2	002	002	002	002	002	002			
3	003	003	003	003	003	003			
4	004	004	004	004	004	004			
5	005	005	005	005	005	005			
6	006	006	006	006	006	006			
7	007	007	007	007	007	007			
8	008	008	008	008	008	008			
9	009	009	009	009	009	009			
A	010	010	010	010					
B	011	011	011	011					
C	012	012	012	012					
D	013	013	013	013					
#	107	107	107	107	107	107			
*	019	019	019	019	019	019			
□	016	016	016	016					
→	033	033	033	033	033				
←	133	133	133	133	133				
↑	034	034	034	034	034				
↓	134	134	134	134	134				
↔	135	135	135	135	135	135			
+	054	054	054	054					
-	059	059	059	059					
•	056	056	056	056					
▲						136			
POWER	123	123	123	123	123	123			
START	031	031	031	031					
CLEAR	036	036	036	036					
LOAD	037	037	037	037					
RESET	038	038	038	038			038		
CANCEL	048	048	048	048					
ENTER							105		
OK							118		
SET							119		
MENU							120		
FUNC							121		
HOME							122		

\* 1ZC16 for illumination

# Applications with mec switches

<p><b>Studio Equipment</b></p>  <p>Navimec, 3A+1ZA</p>	<p><b>Security Access Control</b></p>  <p>Navimec, 3A+1B+2A, 3A+1A</p>	<p><b>Digital Microscope</b></p>   <p>3F+1D</p>
<p><b>Barcode Reader</b></p>  <p>3C in-moulded</p>	<p><b>Pump Control Unit</b></p>  <p>3E</p>	<p><b>Space Shuttle Internal Communication</b></p>   <p>Unimec 15501+16300+16310</p>
<p><b>Control for Video Camera in Police Cars</b></p>  <p>3A+1A, 1H</p>	<p><b>Conference Systems</b></p>  <p>3F+1ZA, 1ZC    3A+1H, 1M</p>	<p><b>Door Entry Control</b></p>   <p>3F+1T, 1U, 1V, 1F</p>

# Applications with mec switches
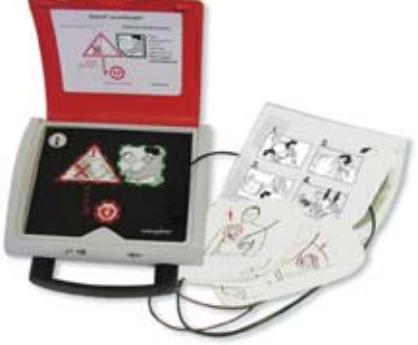
<p><b>Police Speed Control</b></p>  <p>3F+1D, 1T, 1V</p>	<p><b>Control Panel for Boats</b></p>    <p>3F+1U</p>	<p><b>Scooter for Disabled People</b></p>   <p>3F+1D</p>
<p><b>Defibrillator</b></p>  <p>3C under foil</p>	<p><b>Tree Felling Equipment</b></p>   <p>3E</p>	<p><b>Flight Simulators</b></p>  <p>3F+1P</p> <p>3F+1P,1D</p>
<p><b>Military Handheld Computer</b></p>    <p>3C</p>	<p><b>Car Operation Panel for Disabled People</b></p>  <p>3F+1ZA, 1ZC</p> <p>Navimec, 3F+1ZC</p>	<p><b>Mixing Console</b></p>   <p>3F+1K,1E</p>


# multimec® 3F + 1GA/1GC

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C




## Dimensions (through-hole)

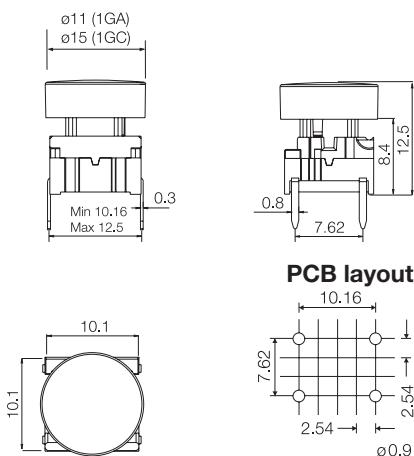

## Dimensions (w/extender)

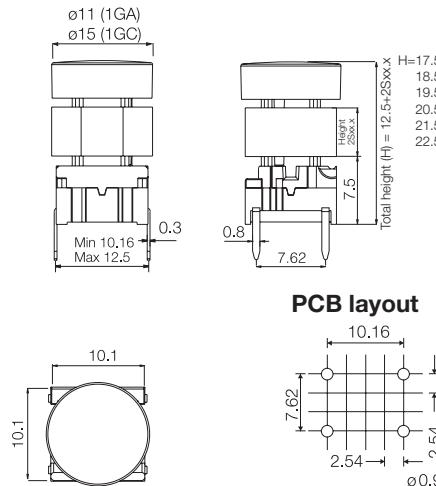

## Dimensions (SMD)

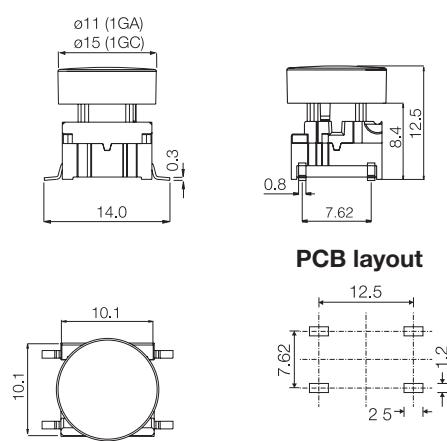

## How to order

<b>3   F</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	+	<b>1   G   A   0   9</b>	+	<b>2   S   0   9   -       .   0</b>	
<b>Switch</b>					<b>Cap black</b>		<b>Extender black</b>	<b>Height</b>
<b>M</b> ounting								<b>05.0</b>
<b>T</b> hrough-hole								<b>06.0</b>
<b>S</b> urface mount								<b>07.0</b>
								<b>08.0</b>
								<b>09.0</b>
								<b>10.0</b>
								(Optional) Adds 5-10 mm to total height.

Keycap	Variable Extender	H (height) mm	Example
1GA/1GC	2S09-05.0	12.5	H 1
1GA/1GC	2S09-06.0	17.5	H 2
	2S09-07.0	18.5	
	2S09-08.0	19.5	
	2S09-09.0	20.5	
	2S09-10.0	21.5	
		22.5	H 3

H = Overall height


Overall heights below 12.5 mm - Please see Multimec® versions 3C and 3E.

All 2S09 extenders are stackable giving the possibility to match most overall heights.

A = We recommend you to allocate enough space for travel of the foil and leave the area free from adhesive.

Switch travel = 1 mm.

H = We recommend you to calculate this dimension from the top of the PCB to the inner top of the panel.

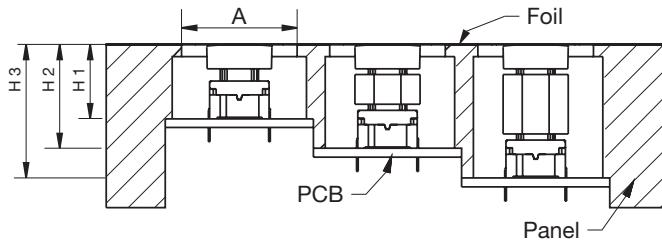

**Ordering example:** 3FTL6 + 1GA09 or 3FTL6 + 2S09-07.0 + 1GC09

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

# multimec® 3C/3E

## Technical Data

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C  
high temp: -40/+160°C  
actuator:  
in PPS: -40/+160°C  
in polycarbonate: -40/+85°C



Standard 3C		Variable heights 3E	
Dimensions (through-hole)	Dimensions (SMD)	Dimensions (through-hole)	Dimensions (SMD)
PCB layout	PCB layout	PCB layout	PCB layout

## How to order

<b>3   C</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Switch</b>	<b>Mounting</b>	<b>L 6 low temp. white</b>	<b>L 9 low temp. black</b>	<b>H 9 high temp.</b>		
	<b>T through-hole</b>					
	<b>S surface mount</b>					

<b>3   E</b>	<input type="checkbox"/>	<input type="checkbox"/>	<b>9</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Switch</b>	<b>Mounting</b>	<b>L low temp.</b>	<b>Black</b>	<b>-</b>	<b>Standard overall height</b>	
	<b>T through-hole</b>	<b>H high temp.</b>	<b>Actuator made of PPS</b>		<b>08.0</b>	
	<b>S surface mount</b>				<b>09.5</b>	

## Custom heights:

3E is available in any height from 08.0 to 15.0mm.  
Min. order qty. for custom heights is 2.000 pcs.

<b>3   E</b>	<b>T</b>	<b>L</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Switch</b>	<b>Mounting</b>	<b>L low temp.</b>	<b>20 blue</b>	<b>-</b>	<b>Standard overall height</b>	
	<b>T through-hole</b>		<b>23 grey</b>		<b>08.0</b>	

Switch and 3E actuator can be delivered unassembled.

The actuators made of polycarbonate can also be used for high temperature switches,  
however they must be mounted after soldering and the temp. range will be reduced to 85°C.

**Ordering example:** 3CTL6 and 3ETL9-09.5 or 3ETL23-08.0


# varimec™ double variability

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range switch:  
low temp: -40/+115°C  
high temp: -40/+160 °C
- temperature range cap:  
-40/+160 °C




**Round ø5.2**

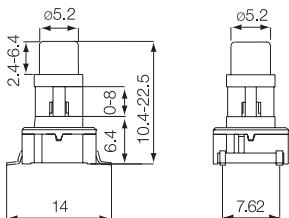


**Round ø7.8**

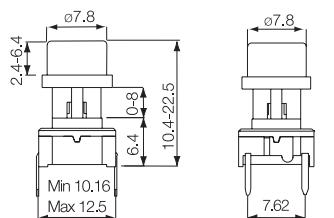


**Round ø11.6**

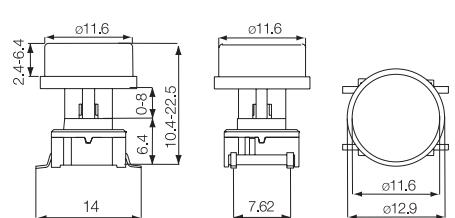

**PCB Layout (through-hole)**




**PCB Layout (SMD)**



**The Concept**

**H** = Overall heights from 10.4-22.5  
**A** = Variable height from 2.4 to 6.4  
**A** cannot exceed **H** - 8.0  
**B** = Fixed recess 1.6  
**D** = Fixed switch 6.4  
**C** = Variable from 0-8.1  
**C** = **H-A-B-D**  
 All measurements in mm

## How to order



**Switch**

**Shape and Size**

**Colour Codes**

**Overall Height H**

**Height above recess A**

**Tape\***

**3ETL**

**A 5.2 Round**

**60 blue**

**A 10.4**

**A 2.4**

**R**

**3ESH**

**E 7.8 Round**

**63 grey**

**B 11.0**

**B 3.0**

**3ETH**

**K 11.6 Round**

**64 yellow**

**C 12.0**

**C 3.5**

**68 red**

**D 12.5**

**D 4.0**

**69 black**

**E 13.0**

**E 4.5**

**F 14.0**

**F 5.0**

**G 15.0**

**G 5.6**

**H 16.0**

**H 6.4**

**J 19.0**

**K 22.5**

**Cap alone:**

Instead of part no. for switch please use 3E- and then same as above

**Examples Switch and Cap:**

3ETLE64CC = Switch 3ETL, 7.8 Round Cap, Yellow, Overall Height 12.0, Height above recess 3.5, (Height under recess 0.5).

**Example Cap Alone:**

3E-E63FF = Cap, 7.8 Round, Grey, Overall Height with switch 14.0, Height above recess 5.0, (Height under recess 1.0).

Min. order is 2.000 pcs. per shape, size and heights for parts mentioned above.


For heights not mentioned in the list a start-up fee will apply.

\*Only overall height up to 12.5mm can be supplied on tape.


# varimec™ double variability

## Technical Data


- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range switch:  
low temp: -40/+115°C  
high temp: -40/+160°C
- temperature range cap:  
-40/+160°C

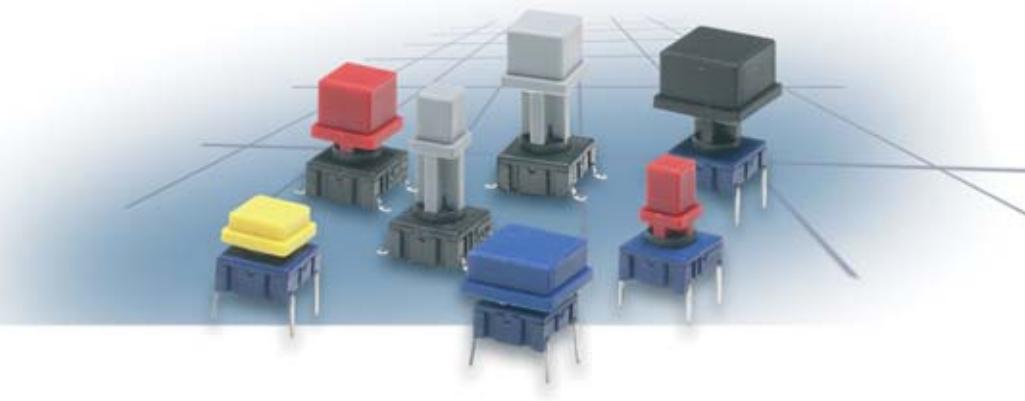


**Square 5.2**

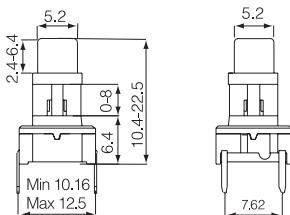


**Square 7.8**

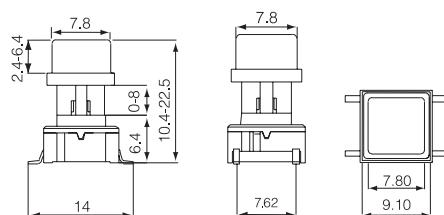


**Square 11.6**

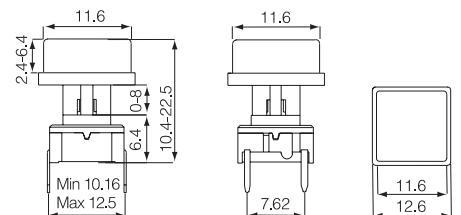

## PCB Layout (through-hole)




## PCB Layout (SMD)



## The Concept

**H** = Overall heights from 10.4 - 22.5  
**A** = Variable height from 2.4 to 6.4  
**A** cannot exceed **H** - 8.0  
**B** = Fixed recess 1.6  
**D** = Fixed switch 6.4  
**C** = Variable from 0-8.1  
**C** = **H-A-B-D**  
 All measurements in mm

## How to order



### Switch

### Shape and Size

### Colour Codes

### Overall Height

### Height above recess

### Tape\*

**3ETL**

**B** 5.2 Square

**60** blue

**H**

**A**

**R**

**3ESH**

**F** 7.8 Square

**63** grey

**A** 10.4

**A** 2.4

**3ETH**

**L** 11.6 Square

**64** yellow

**B** 11.0

**B** 3.0

**68** red

**C** 12.0

**C** 3.5

**69** black

**D** 12.5

**D** 4.0

**E** 13.0

**E** 4.5

**F** 14.0

**F** 5.0

**G** 15.0

**G** 5.6

**H** 16.0

**H** 6.4

**J** 19.0

**K** 22.5

## Cap alone:

Instead of part no. for switch please use 3E- and then same as above

## Examples Switch and Cap:

3ESHB60AA = Switch 3ESH, 5.2 Square Cap, Blue, Overall Height 10.4, Height above recess 2.4, (Height under recess 0).

## Example Cap Alone:

3E-E63FF = Cap, 7.8 Square, Grey, Overall Height with switch 14.0, Height above recess 5.0, (Height under recess 1.0).

Min. order is 2.000 pcs. per shape, size and heights for parts mentioned above.

For heights not mentioned in the list a start-up fee will apply.

\*Only overall height up to 12.5 mm can be supplied on tape.


# multimec® Right Angle Switches

## Technical Data


- through-hole only
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C




**Dimensions 3CTRAS**

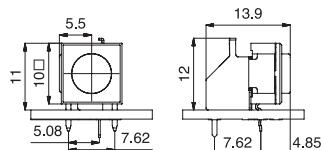


PCB layout

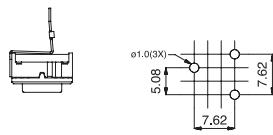


**Dimensions 3ETRAS**

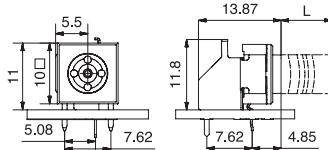


PCB layout

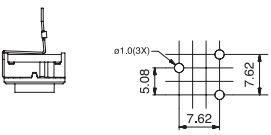


**Dimensions 3FTRAS**

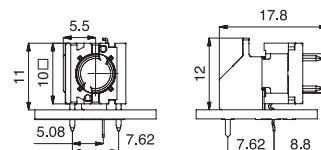


PCB layout

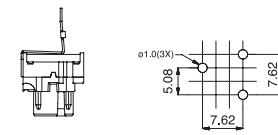

**Dimensions 3FTRAS  
w/LED**

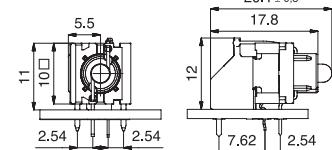

PCB layout  
(top view)



## How to order

**3**  **E**  
Switch  
3C  
3F

**T**  
Mounting  
T through-hole

**L** **6**  
L low temp.

**R** **A** **S**  
Right angle support

3FTL6RAS - for caps 1D-1K-1P-1S see page 31

**3** **E**

**T**

**L**

Switch

Mounting  
T through-hole

low temp.



9 black  
20 blue  
23 grey  
24 yellow  
28 red  
29 black

Actuator made of PPS

Two digit colour code means  
actuators made of polycarbonate

-

**R** **A** **S**

Actuator height  
1.6  
3.1  
4.0  
4.6  
5.6  
8.6

**3** **F**

**T**

**L** **6**

Switch

Mounting  
T through-hole

low temp.



**LED**  
00 blue  
20 green  
40 yellow  
60 white  
80 red  
2040 green/yellow  
8020 red/green  
8040 red/yellow

**R** **A** **S**

Right angle support

3FTL6RAS w/LED can be used with the keycaps:  
1D, 1E, 1F, 1K, 1N, 1Q, 1R, 1S, 1T, 1U, 1V, 1WA, 1WD,  
1WP, 1X

Ask for drawings/dimensions for these keycaps with  
3FTL6RAS w/LED

**Ordering example:** 3FTL620RAS + 1Q096

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)


# multimec® RAS + 1D/1K/1P/1S

## Technical Data


- through-hole only
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:  
low temp: -40/+115°C




**Dimensions 1D**

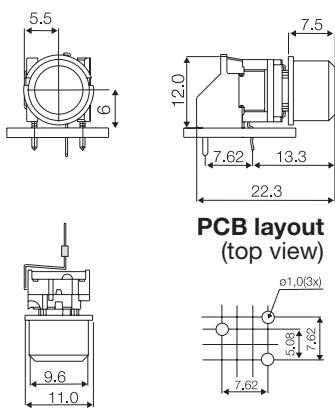


**Dimensions 1K**

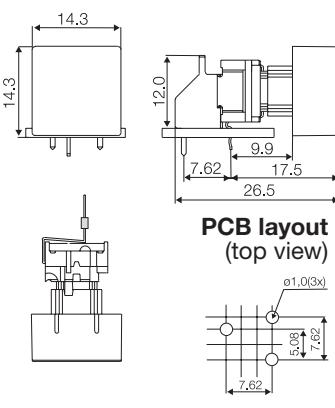

**Dimensions 1P**

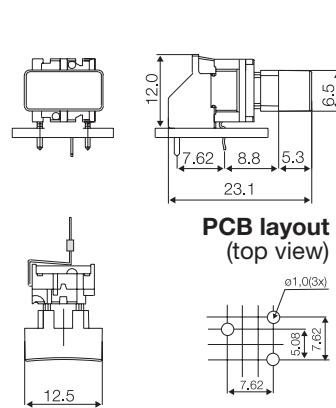

**Dimensions 1S**

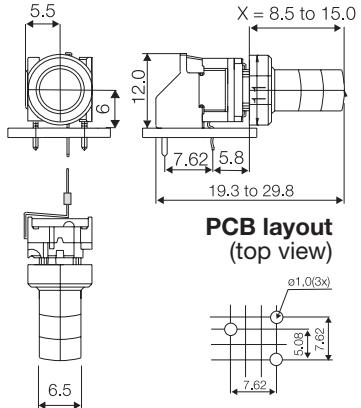

## How to order

**3 | F**    **T**  
Switch    Mounting  
T through-hole

**L | 6**  
L 6 low temp.

**R | A | S**    +  
Right angle support

**1 | D |    |**

**Cap**  
 00 blue  
02 green  
03 grey  
04 yellow  
06 white  
08 red  
09 black

**30** ultra blue  
**40** dusty blue  
**42** aqua blue  
**32** mint green  
**33** tele grey  
**34** melon  
**38** noble red

**1 | P |    |**

**Cap**  
 00 blue  
03 grey  
08 red  
09 black

**2 | K |    |**

**Bezel**  
 03 grey  
06 white  
08 red  
09 black

**1 | K |    | 1 | 6**

**Cap**  
 00 blue  
02 green  
03 grey  
04 yellow  
06 white  
08 red  
09 black

**1 | S | 0 | 9 | - |    | . |**

**Cap black**  
 H              X \*  
16.0              8.5  
19.0              11.5  
22.5              15.0

Other keycaps such as 1GA, 1GC, 1N, 1T, 1U, 1V, 1WA, 1WD, 1WP and 1X can be used on 3FTL6RAS. It may require reducing the size of the PCB to the front side of the switch body to avoid the cap touching the PCB. Ask for drawings/dimensions for these keycaps with 3FTL6RAS.






Please also see 3FTL6RAS with LED on page 30.









\*Any cap height X from 8.5 to 15.0 mm is available.  
Please order 1S09-H, where H = X+7.5 mm

Min. order quantity for custom heights is 2.000 pcs.




**Ordering example:** 3FTL6RAS+1K0016 + 2K03

# multimec® basic switch modules

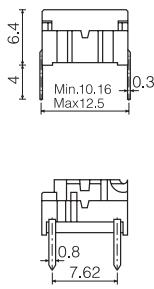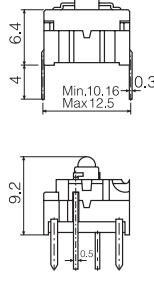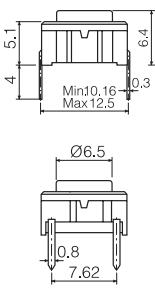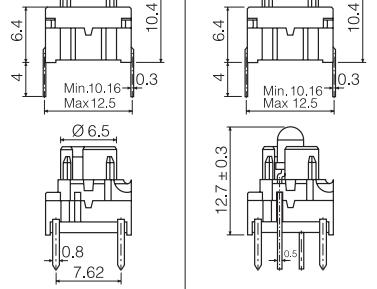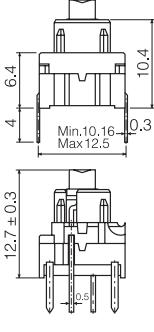Through-hole Versions					
3A	3C	3E	3F		
For 1A/1B/1M/1ZA/1ZB w/LED for 1C/1H		For 3E actuators/Varimec	For 1D/1K/1N/1P/1S/1T/1U/1V/1WA/1WD/1WG/1WP/1X/1ZC/1GA/1GC w/LED for 1D/1E/1F/1N/1Q/1R/1S/1X	w/LED for 1D/1E/1F/1N/1Q/1R/1S/1X	w/LED for 1K /1KB/1KC/1T/1U/1V/1WA/1WD/1WP
					
Standard Versions					
3ATL6 3ATH9	3ATL600/20/40/80 3CTL9 3CTH9	3CTL6/3CTL9 3CTH9	3ETLXX-H* 3ETHXX-H*	3FTL6 3FTH9	3FTL600/20/40/60/80/ 2040/8020/8040 3FTL623/45/88
* 3E available in 6 standard heights: 08.0, 09.5, 10.4, 11.0, 12.0, 15.0 mm. Other heights between 08.0 and 15.0 mm are available upon request.					
Specials: Gold contacts, quiet version and actuation force other than 3.0N					

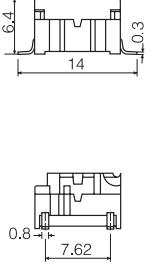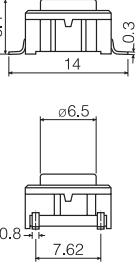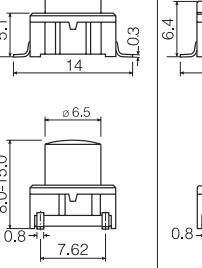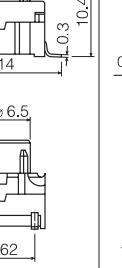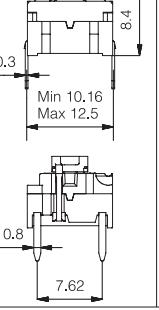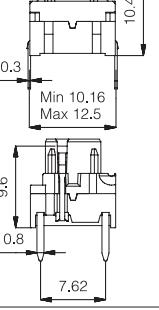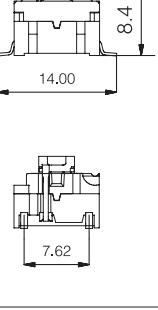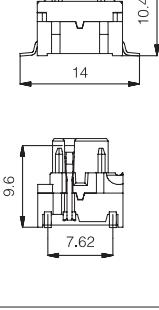
Surface Mount Versions				illumec™ Through-hole Versions		illumec™ Surface Mount Versions	
3A	3C	3E	3F	4AT w/LEDs	4FT w/LEDs	4AS w/LEDs	4FS w/LEDs
For 1A/1B/1M/1ZA/1ZB		For 3E actuators/Varimec	For 1D/1K/1N/1P/1S/1T/1U/1V/1WA/1WD/1WP/1X/1ZC/1GA/1GC	For 1C/1H	For 1D/1E/1F/1K/1KB/1KC/1N/1Q/1R/1S/1T/1U/1V/1WA/1WD/1WP/1X	For 1C/1H	For 1D/1E/1F/1K/1KB/1KC/1N/1Q/1R/1S/1T/1U/1V/1WA/1WD/1WP/1X
							
Standard Versions				Standard Versions			
3ASH9/3ASH9R	3CSH9/3CSH9R	3ESH9/3ESH9R	3FSH9/3FSH9R	4ATH901/22/42/61/82/ 2242/8222/8242	4FTH901/22/42/61/82/ 2242/8222/8242	4ASH901/22/42/61/82/ 2242/8222/8242	4FSH901/22/42/61/82/ 2242/8222/8242

Co-planarity =  $\leq 0.05$ 

Right Angle Versions			
3C	3E	3F	3F w/LED
	For 3E actuators/Varimec	For 1D/1K/1N/1P/1S/1T/1U/1V/1W/1WA/1WD/1WP/1X/1ZC/1GA/1GC	For 1D/1E/1F/1N/1Q/1R/1S/1X
			
Standard Versions			
3CTRL6RAS	3ETXX-X.XRAS	3FTL6RAS	3FTL600/20/40/60/80/ 2040/8020/8040RAS


DIMENSIONS (mm) Unless otherwise specified, all tolerances  $\pm 0.2$ 

## multimec® Cross Section

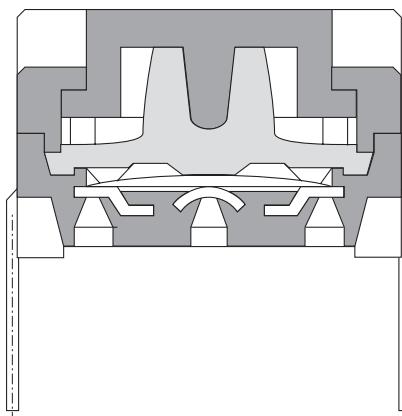


# multimec® basic switches and tape & reel

## Recommended PCB layout

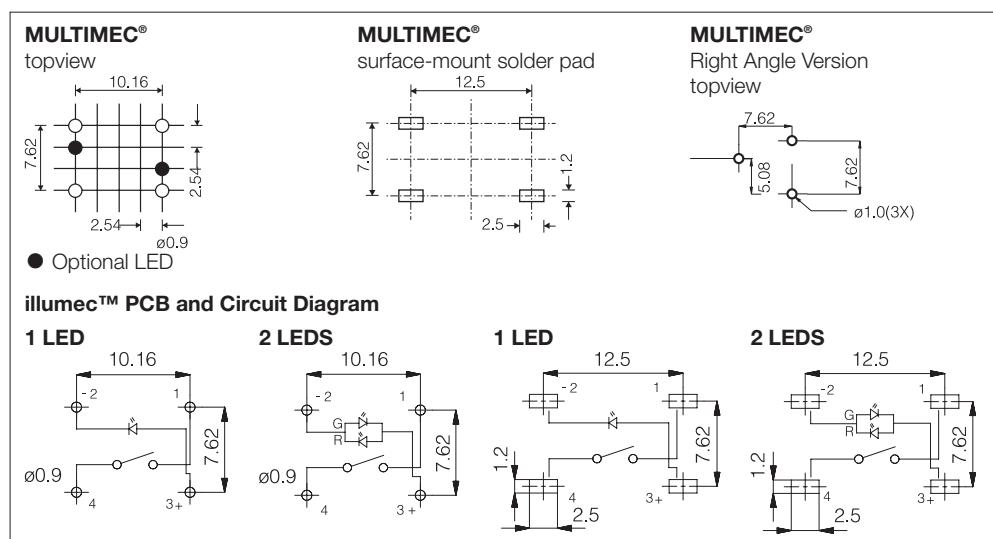

## Operating Force (typical example)

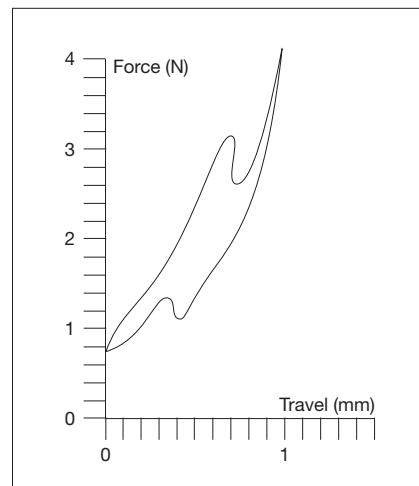

Tape and reel is available for the parts listed and has the following specifications:

<b>Reel diameter</b>	ø330mm
<b>Tape width</b>	24mm
<b>Pitch</b>	see list
<b>Tape and reel material</b>	antistatic or better
<b>Quantity per reel</b>	see list

## 3A/3C/3E/3F multimec® tape & reel


Part No.	Ordering Code	Pitch	Quantity per reel
3ASH9	3ASH9R	16	500
3CSH9	3CSH9R	16	500
3ESH9	3ESH9R	16	500
3ESH9-08.0	3ESH9R08.0	20	250
3ESH9-09.5	3ESH9R09.5	20	250
3ESH9-10.4	3ESH9R10.4	20	250
3ESH9-11.0	3ESH9R11.0	20	250
3ESH9-12.0	3ESH9R12.0	20	250
All varimec below R after the part no.		20	250
12.5		20	250
3FSH9	3FSH9R	20	250

## 4F illumec™ tape & reel


Part No.	Ordering Code	Pitch	Quantity per reel
4FSH901	4FSH901R	20	250
4FSH922	4FSH922R	20	250
4FSH942	4FSH942R	20	250
4FSH961	4FSH961R	20	250
4FSH982	4FSH982R	20	250
4FSH92242	4FSH92242R	20	250
4FSH98222	4FSH98222R	20	250
4FSH98242	4FSH98242R	20	250

Specifications are according to EIA 600481-3 and IEC 60286-3


## Circuit Diagram

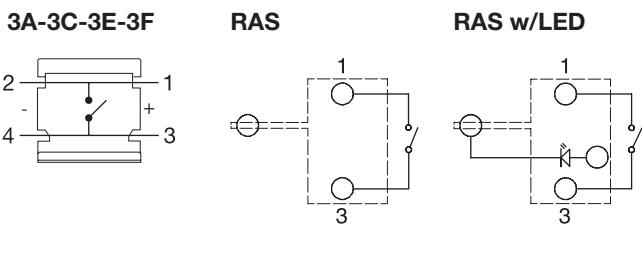

## How to Assemble

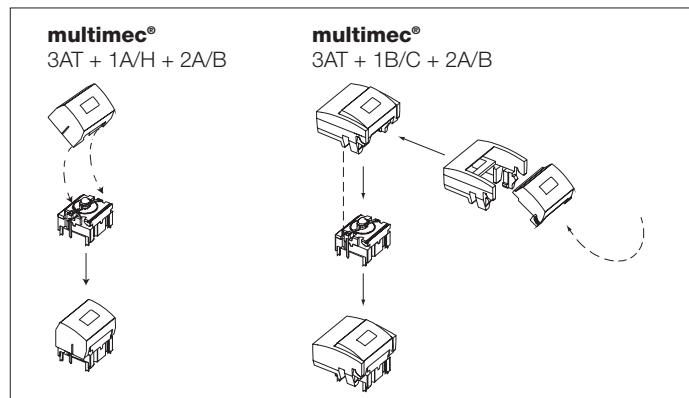

## Mounting Tool for Through-hole versions

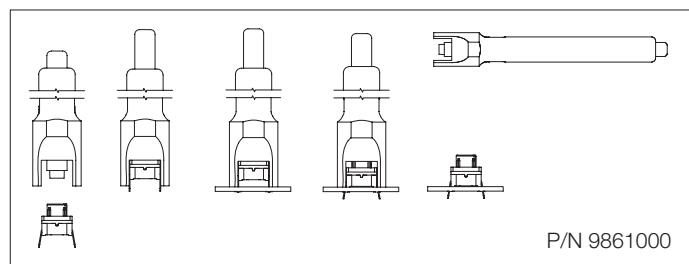


Specifications are subject to change without notice.


# multimec® spacing

## Basic switch spacing

through-hole

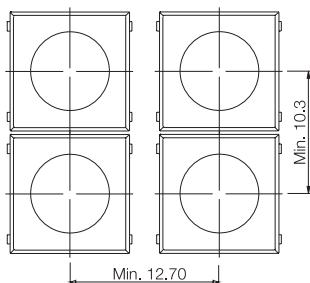


surface-mount

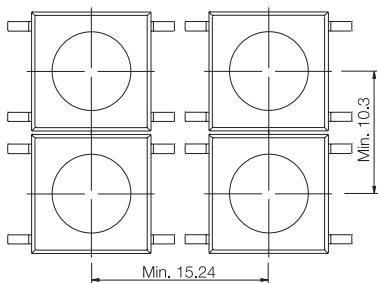


## Recommended switch/cap spacing


Switch spacing

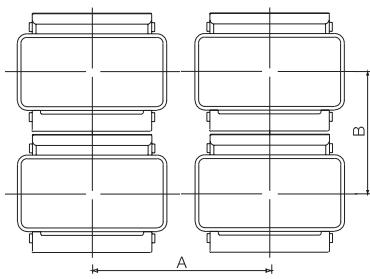


Cap dimension



Panel cut-out




Panel Cut-out

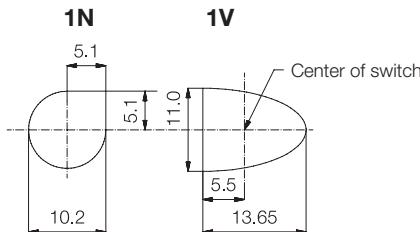


Spacing in mm

## Spacing examples

multimec®




multimec®




multimec®

3AT + 1A/H




multimec®

3AT + 1M

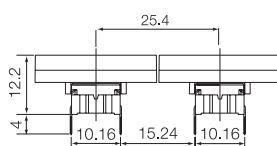


multimec®

1N + 1N + 1N

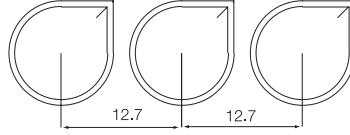

multimec®

1V + 1T + 1V

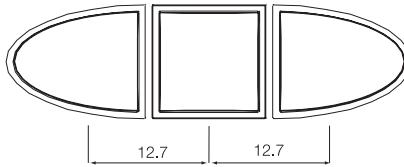

Cap series

Recommended\*  
min. switch spacing AxBNominal cap dimension  
W x HRecommended  
min. panel cut-out

1A	12.7 x 10.16	12.6 x 10.1	13.0 x 10.5
1B/1C+2A/2B	15.24 x 15.24	15.1 x 15.1	15.5 x 15.5
1D/1E/1F	12.7 x 12.7	ø9.6	ø10.0
1K	15.24 x 15.24	14.3 x 14.3	14.7 x 14.7
1M	25.4 x 10.16	25.0 x 10.1	25.7 x 10.5
1N	12.7 x 12.7	ø9.8/□4.9	ø10.2/□5.1
1P/1Q/1R	15.24 x 10.16	6.5 x 12.5	7.0 x 13.0, R Max. 1.0
1S	12.7 x 10.16	ø6.5	ø7.0
1T	12.7 x 12.7	10.6 x 10.6	11.0 x 11.0
1U	12.7 x 12.7	ø10.6	ø11.0
1V (pointing outwards)	12.7 x 12.7	10.6 x 13.25	11.0 x 13.65
1X	12.7 x 12.7	9.4 x 7.4	9.8 x 7.9

\*A dimension with surface mount version is min. 15.24. Depending on manufacturing technology it may be necessary either to reduce pad dimension, or to increase spacing.

In all applications the total assembly tolerance must be analysed by the user (board tolerance, front panel, assembly accuracy), to secure enough room for a free switch movement in the final product. The specifications on this page are to be considered as an aid only. MEC cannot be held responsible for the final assembly.

# multimec® technical specifications

## RoHS Compatible

	3A-3C-3E-3F Low Temperature Versions Silver      Gold	3A-3C-3E-3F High Temperature Versions Silver      Gold	illumec™ 4A - 4F High Temperature Versions Silver      Gold
<b>Electrical Specifications</b>			
Contact resistance	<30m Ω - typ. 10m Ω	<30m Ω - typ. 10m Ω	<30m Ω - typ. 10 m Ω
Insulation resistance	>10M Ω	>10M Ω	>10M Ω
Recommended load	0.5-50mA 24VDC	0.5μ-50mA 24VDC	0.5-50mA 24VDC
Contact bounce	<2mS - typically 0.5mS	<2mS - typically 0.5mS	<2mS - typically 0.5mS
<b>Mechanical Specifications</b>			
Standard actuation force (switch)	3.0N typ.	3.0N typ.	3.0N typ.
Max. actuation force without cap	100N for 10 sec.	100N for 10 sec.	100N for 10 sec.
Key travel (switch)	1 mm	1 mm	1 mm
Life time (switch)	>10.000.000 cycles	>10.000.000 cycles	>10.000.000 cycles
<b>Temperature Range</b>			
Working temperature	Min. -40°C Max. +115°C	Min. -40°C Max. +160°C	Min. -30°C Max. +85°C*
Storage temperature	Min. -40°C Max. +115°C	Min. -40°C Max. +160°C	Min. -30°C Max. +85°C*
<b>Soldering IEC 68-2-20</b>			
Wave	max. 260°C for max. 10 sec., please refer to usage guidelines.	Infrared, vapour phase, wave - max. 240°C for max. 40 sec. or max. 260°C for max. 30 sec.	Infrared, vapour phase, wave - max. 240°C for max. 40 sec. or max. 260°C for max. 30 sec.
Soldering iron	max. 350°C for max. 3 sec. Flux tight.	Soldering iron - max. 350°C for max. 3 sec. Flux tight.	Soldering iron - max. 350°C for max. 3 sec. Flux tight.
<b>Environmental Endurance IEC 68-2-3</b>			
Temperature	+40°C	+40°C	+40°C
Humidity	93% RH	93% RH	93% RH
Duration	56 Days	56 Days	56 Days
<b>Temperature Cycling IEC 68-2-14</b>			
Temperature limit	Min. -40°C - Max. +125°C	Min. -40°C - Max. +125°C	Min. -40°C - Max. +125°C
Number of cycles	10	10	10
Exposure time at each temperature	30 min.	30 min.	30 min.
Recovery time before measurements	16 hrs.	16 hrs.	16 hrs.
Sealing IEC 529	IP-67	IP-67	IP-67
Cleaning	Standard methods - see usage guidelines	Standard methods - see usage guidelines	Standard methods - see usage guidelines
<b>Vibration Test IEC 68-2-6</b>			
Cycles			10
Cycles time			2 hrs.
<b>Material Specifications - Switches</b>			
Housing	PBT UL94VO	PPS UL94VO	PPS UL94VO
Actuator	PBT UL94VO	PPS UL94VO	PPS UL94VO
Sealing + spring	Silicone rubber	Silicone rubber	Silicone rubber
Contact spring	Stainless steel + 3µAg	Stainless steel + 1µAu	Stainless steel + 1µAu
Fixed contacts	SnCu + 2µNI + 3µAg	SnCu + 2µNI + 1µAu	SnCu + 2µNI + 3µAg
Terminals	SnCu + 2µNI + 3µSn100	SnCu + 2µNI + 3µSn100	SnCu + 2µNI + 3µSn100
<b>Material Specifications - Caps &amp; Bezels</b>			
Material	Parts	Temp limit	UL rating
ABS	1A, 1B, 1C, 1D, 1E, 1F, 1H, 1K, 1M, 1N, 1P, 1Q, 1R, 1T, 1U, 1V, 1WA, 1WD, 1WP, 1X, 1ZA, 1ZB, 1ZC.	Max. 65°C	UL94HB
Polycarbonate	All lenses, 3E coloured actuators	Max. 85°C	UL94V1
LCP	Black actuator of 3E	Max. 160°C	UL94VO
PPS	1S, 2S	Max. 160°C	UL94VO
Polyamide	Actuator of Varimec™, 1GA/1GC	Max. 160°C	UL94VO
<b>Legends Adhesion</b>	ISO Class: 1/ASTM Class: 4B DIN EN ISO 2409		

\* LED max. working temperature

Specifications are subject to change without notice.

# multimec® LEDs

**For 3A switches**

	3AXXX (for 1C/1H)				2BXXX			
Colour	B	G	Y	R	G	Y	R	
Color Codes	00	20	40	80	20	40	80	
Absolute Maximum Ratings (Ta=25°C)								
Power	mW	105	100	60	100	75	60	60
Current forward	mA	30	30	20	30	20	20	20
Forward peak current	mA	150	120	80	120	60**	60**	60**
Voltage reverse	V	5	5	5	5	3	3	3
Operating temperature	°C	-40 - +85	-55 - +100			-25 - +85		
Storage temperature	°C	-40 - +85	-55 - +100			-30 - +100		
Soldering temperature	°C	260/5 sec.	260 for max. 3 sec.			260 for max. 5 sec.		
Electrical-Optical Characteristics (Ta=25°C)								
Voltage forward	Typ. V	3.8	2.1*	2.1*	2.0*	2.1	2.1	2.0
	Max. V	4.5	2.8*	2.8*	2.8*	3.0	3.0	3.0
Current reverse (VR = 5V)	µA	10	100	100	100	10	10	10
Wave length	nm	466	565	585	630	563	585	650
Spread	Δnm	30	30	35	40	40	40	40
Spread angle	degree	40	90	90	90	45	45	45
Luminous Intensity	Min. mcd	4	0.7	1.7	1.1	9.0	5.6	5.6
	Typ. mcd	10	2.5	5.6	3.7	25	16	16
Orientation	The longer pin is the anode, the shorter is the cathode							

\*/F = 20mA, \*\*Pulse width 1ms Duty cycle 1:5

**For 3F switches**

	3FXXX (for 1E-1F-1N-1Q-1R-1S-1X)				3FXXX (for 1K-1T-1U-1V-1W-1WD)					
Colour	B	G	Y	R	G/Y	R/G	R/Y	G	Y	R
Color Codes	00	20	40	80	2040	8020	8040	23	45	88
Absolute Maximum Ratings (Ta=25°C)										
Power	mW	105	70	60	60	120	120	150	130	300
Current forward	mA	30	20	20	20	25	25	40	40	90
Forward peak current	mA	200	60**	60**	60**	150	150	500	500	1000
Voltage reverse	V	5	3	3	3	5	5	5	12	5
Operating temperature	°C	-25 - +85				-40 - +85				-55 - +100
Storage temperature	°C	-30 - +100				-40 - +85				-55 - +100
Soldering temperature	°C	260 for max. 5 sec.				260 for max. 2 sec.				300 for max. 3 sec.
Electrical-Optical Characteristics (Ta=25°C)										
Voltage Forward	Typ. V	2.1	2.1	2.1	2.0	2.1	2.1	2.1	2.1*	2.3***
	Max. V	2.8	3.0	3.0	3.0	2.8	2.8	2.8	2.5*	2.5***
Current reverse (VR = 5V)	µA	2	10	10	10	2	2	2	10	10
Wave length	nm	460	563	585	650	565/590	625/565	625/590	570	587
Spread	Δnm	40	40	40	40	35	35	35	25	45
Spread angle	degree	20	45	45	45	60	60	80	90	55
Luminous Intensity	Min. mcd	20	9.0	5.6	5.6	8	8	8	71****	71****
	Typ. mcd	25	25	16	16	25	25	25	112****	112****
Orientation	The longer pin is the anode, the shorter is the cathode. For bicolor LEDs the anode for the first colour (ex. 2080) is the longer pin.									

\*\*\*/F = 50mA, \*\*\*\*Luminous Flux mlm

**For 4A/4F switches**

	illumec™ LEDs specifications				
Colour	B	G	Y	W	R
Color Codes	01	22	42	61	82
<b>Absolute Maximum Ratings (Ta=25°C)</b>					
Power	mW	60	65	65	65
Current forward	mA	20	25	25	25
Forward peak current	mA	150	150	100	100
Voltage reverse	V	5	12	12	5
Operating temperature	°C	-30 - +85			
Storage temperature	°C	-30 - +85			
Soldering temperature	°C	245 for max. 10 sec.			
Electrical-Optical Characteristics (Ta=25°C)					
Voltage forward	Typ. V	3.35	2.2	2	3.05
	Max. V	3.5	2.5	2.5	2.5
Current reverse (VR = 5V)	µA	0.01	0.02	0.01	0.01
Wave length	nm	470	570	588	n.a.
Spread	Δnm	n.a.	30	16	n.a.
Spread angle	degree	145	160	160	138
Luminous Intensity	Min. mcd	30	28	112	28
	Typ. mcd	35	70	150	35
Optical Intensity	Lm/w	4		2.5	

B= Blue, G= Green, Y= Yellow, R= Red, W= White, G/Y= Green/Yellow, R/G= Red/Green, R/Y= Red/Yellow

Specifications are subject to change without notice.

# multimec® Solid Colours

No. Colour RAL Code	00 blue 5012		02 green 6018		03 grey 7004		04 yellow 1023		06 white 9010		08 red 3000		09 black 9004
---------------------------	--------------------	--	---------------------	--	--------------------	--	----------------------	--	---------------------	--	-------------------	--	---------------------

No. Colour RAL Code	30 ultra blue 5002		32 mint green 6029		33 tele grey 7046		34 melon 1028		38 noble red 3002		40 dusty blue 5014		42 aqua blue 5021	
---------------------------	--------------------------	--	--------------------------	--	-------------------------	--	---------------------	--	-------------------------	--	--------------------------	--	-------------------------	--

## Metallic Colors












No. Colour RAL Code	50 dark blue No RAL Code		53 light grey No RAL Code		57 dark grey No RAL Code		58 bordeaux No RAL Code	
---------------------------	--------------------------------	--	---------------------------------	--	--------------------------------	--	-------------------------------	--

Cap		00	02	03	04	06	08	09	30	32	33	34	38	40	42	50	53	57	58
1A		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1B		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1C		X	X	X	X	X	X	X											
1D		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1E		X	X	X	X	X	X	X											
1F		X	X	X	X	X	X	X											
1H		X	X	X	X	X	X	X											
1K		X	X	X	X	X	X	X											
1M		X	X	X	X	X	X	X											
1N		X		X	X		X	X											
1P		X	X	X	X	X	X	X											
1Q		X		X			X	X											
1R		X		X			X	X											
1S									X										
1T		X		X			X	X											
1U		X		X			X	X											
1V		X		X			X	X											
1WA/1WD/1WP		X		X			X	X	X						X	X		X	X
1X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
1ZA				X		X		X	X						X	X	X	X	X
1ZB					X		X		X	X					X	X	X	X	X
1ZC					X		X		X	X					X	X	X	X	X

The RAL Codes mentioned are the codes nearest to the solid colours in the multimec® range.

**Technical Data**

- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:  
low temp: -40/+75°C  
high temp: -40/+160°C
- through-hole version

**Dimensions****Dimensions (w/LED)****Dimensions (w/2 LEDs)****PCB layout****PCB layout (top view)****PCB layout (top view)****How to order**

1 5 [ ] [ ]

+

1 6 2 7 0

+ 1 6 3 0 0 [ ]

+

1 6 3 2 4 [ ]

**Switch**

- 15501 mom. silver  
15551 alt. silver  
15502 mom. gold  
15552 alt. gold  
15500 silent silver  
15401 mom. silver high temp.  
15402 mom. gold high temp.  
15420 silent gold high temp.  
15451 alt. silver high temp.

**Extender****Cap****Cap**

- |    |        |    |                  |
|----|--------|----|------------------|
| 00 | blue   | 30 | ultra blue       |
| 01 | brown  | 40 | dusty blue       |
| 02 | green  | 42 | aqua blue        |
| 03 | grey   | 32 | mint green       |
| 04 | yellow | 33 | tele grey        |
| 05 | golden | 34 | melon            |
| 06 | white  | 38 | noble red        |
| 07 | orange | 50 | metal dark blue  |
| 08 | red    | 53 | metal light grey |
| 09 | black  | 57 | metal dark grey  |
|    |        | 58 | metal bordeaux   |

**Bezel****Bezel**

- 01 brown  
03 grey  
06 white  
09 black



1 5 [ ] [ ] + 1 6 2 7 0 + 1 6 3 0 0 [ ] +

Cap



16325

Lens



02 green

- 04 yellow  
08 red

LED



02 green

- 04 yellow  
08 red

16326



Lens 16327

2 required

LED 16922

2 required

**Ordering example:** 15501 + 16270 + 1630008 + 1632509 + 1632708 + 1692208

# unimec™

## 16310 - 16315

### Technical Data

- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:  
low temp: -40/+75°C  
high temp: -40/+160°C
- through-hole version



Dimensions (through-hole)	Dimensions (w/LED)	Dimensions (w/LED)	Dimensions (w/4 LEDs)
<b>PCB layout</b> 	<b>PCB layout (top view)</b> 	<b>PCB layout (top view)</b> 	<b>PCB layout (top view)</b> 

### How to order



**1 | 5 |   |   |**

+

**1 | 6 | 3 | 0 | 0 |   |**

+

**1 | 6 | 3 | 1 | 0 |   |**

**For 16300 and 16310 only**

- 30 ultra blue
- 40 dusty blue
- 42 aqua blue
- 32 mint green
- 33 tele grey
- 34 melon
- 38 noble red
- 50 metal dark blue
- 53 metal light grey
- 57 metal dark grey
- 58 metal bordeaux



**1 | 5 |   |   |**

+

**1 | 6 | 3 | 0 | 0 |   |**

+

**1 | 6 | 9 | 2 | 1 |   |**

- LED 16921** 02 green  
04 yellow  
08 red

**Bezel 16311**



**Bezel 16312**



**Bezel 16314**



**Bezel 16315**



- LED 16920** 02 green  
04 yellow  
08 red

- LED 16920** 1 required

**LED 16921** 1 required

- LED 16920** 2 required







**LED 16921** 2 required

**Ordering example:** 15501 + 1630003 + 1631408 + 1692008 + 1692108

For updates of products and/or changes of specifications please see [www.mec.dk](http://www.mec.dk)

**Technical Data**

- Max. 250mA/120V/9W AC/6W DC
- 2 pole
- momentary or alternate
- 8 contact functions
- temperature range:  
low temp: -40/+75°C  
high temp: -40/+160°C
- through-hole version

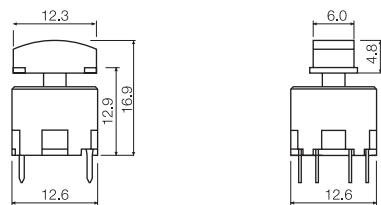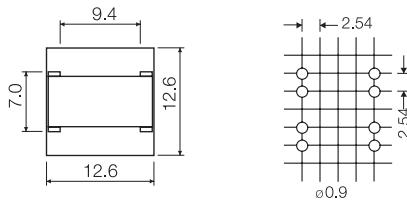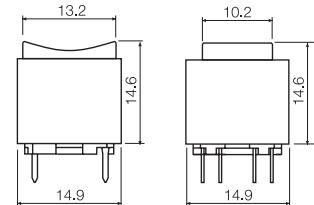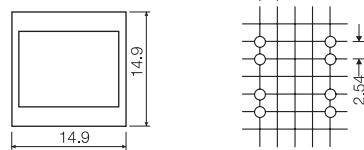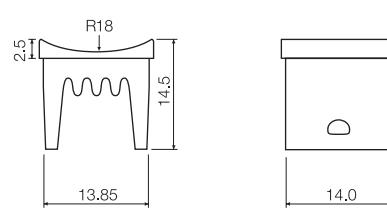**Dimensions 16300****PCB layout****Dimensions 16700****PCB layout****Dimensions 16800**

Blanking Cap  
can be used with  
VARIO SUPPORT

**How to order**

1 5 [ ] [ ]

+

1 6 3 0 0 [ ]

**Switch**

- 15501 mom. silver  
15551 alt. silver  
15502 mom. gold  
15552 alt. gold  
15500 silent silver  
15401 mom. silver high temp.  
15402 mom. gold high temp.  
15420 silent gold high temp.  
15451 alt. silver high temp.



- Cap**  
00 blue  
01 brown  
02 green  
03 grey  
04 yellow  
05 golden  
06 white  
07 orange  
08 red  
09 black

- 30 ultra blue  
40 dusty blue  
42 aqua blue  
32 mint green  
33 tele grey  
34 melon  
38 noble red

- 50 metal dark blue  
53 metal light grey  
57 metal dark grey  
58 metal bordeaux



1 5 [ ] [ ]

+

1 6 7 0 0 [ ]

**Switch**

- Cap**  
00 blue  
02 green  
03 grey  
04 yellow  
06 white  
08 red  
09 black

1 6 8 0 0 [ ]



- Blanking Cap**  
00 blue  
01 brown  
02 green  
03 grey  
04 yellow  
05 golden

- 06 white  
07 orange  
08 red  
09 black


- 11 transparent  
12 transparent green  
14 transparent yellow  
18 transparent red

**Ordering example:** 15551 + 1670009

# unimec™

## Vario Support

For all types of UNIMEC™ switches with bezels - 16310 - 16315 and 16324 - 16326

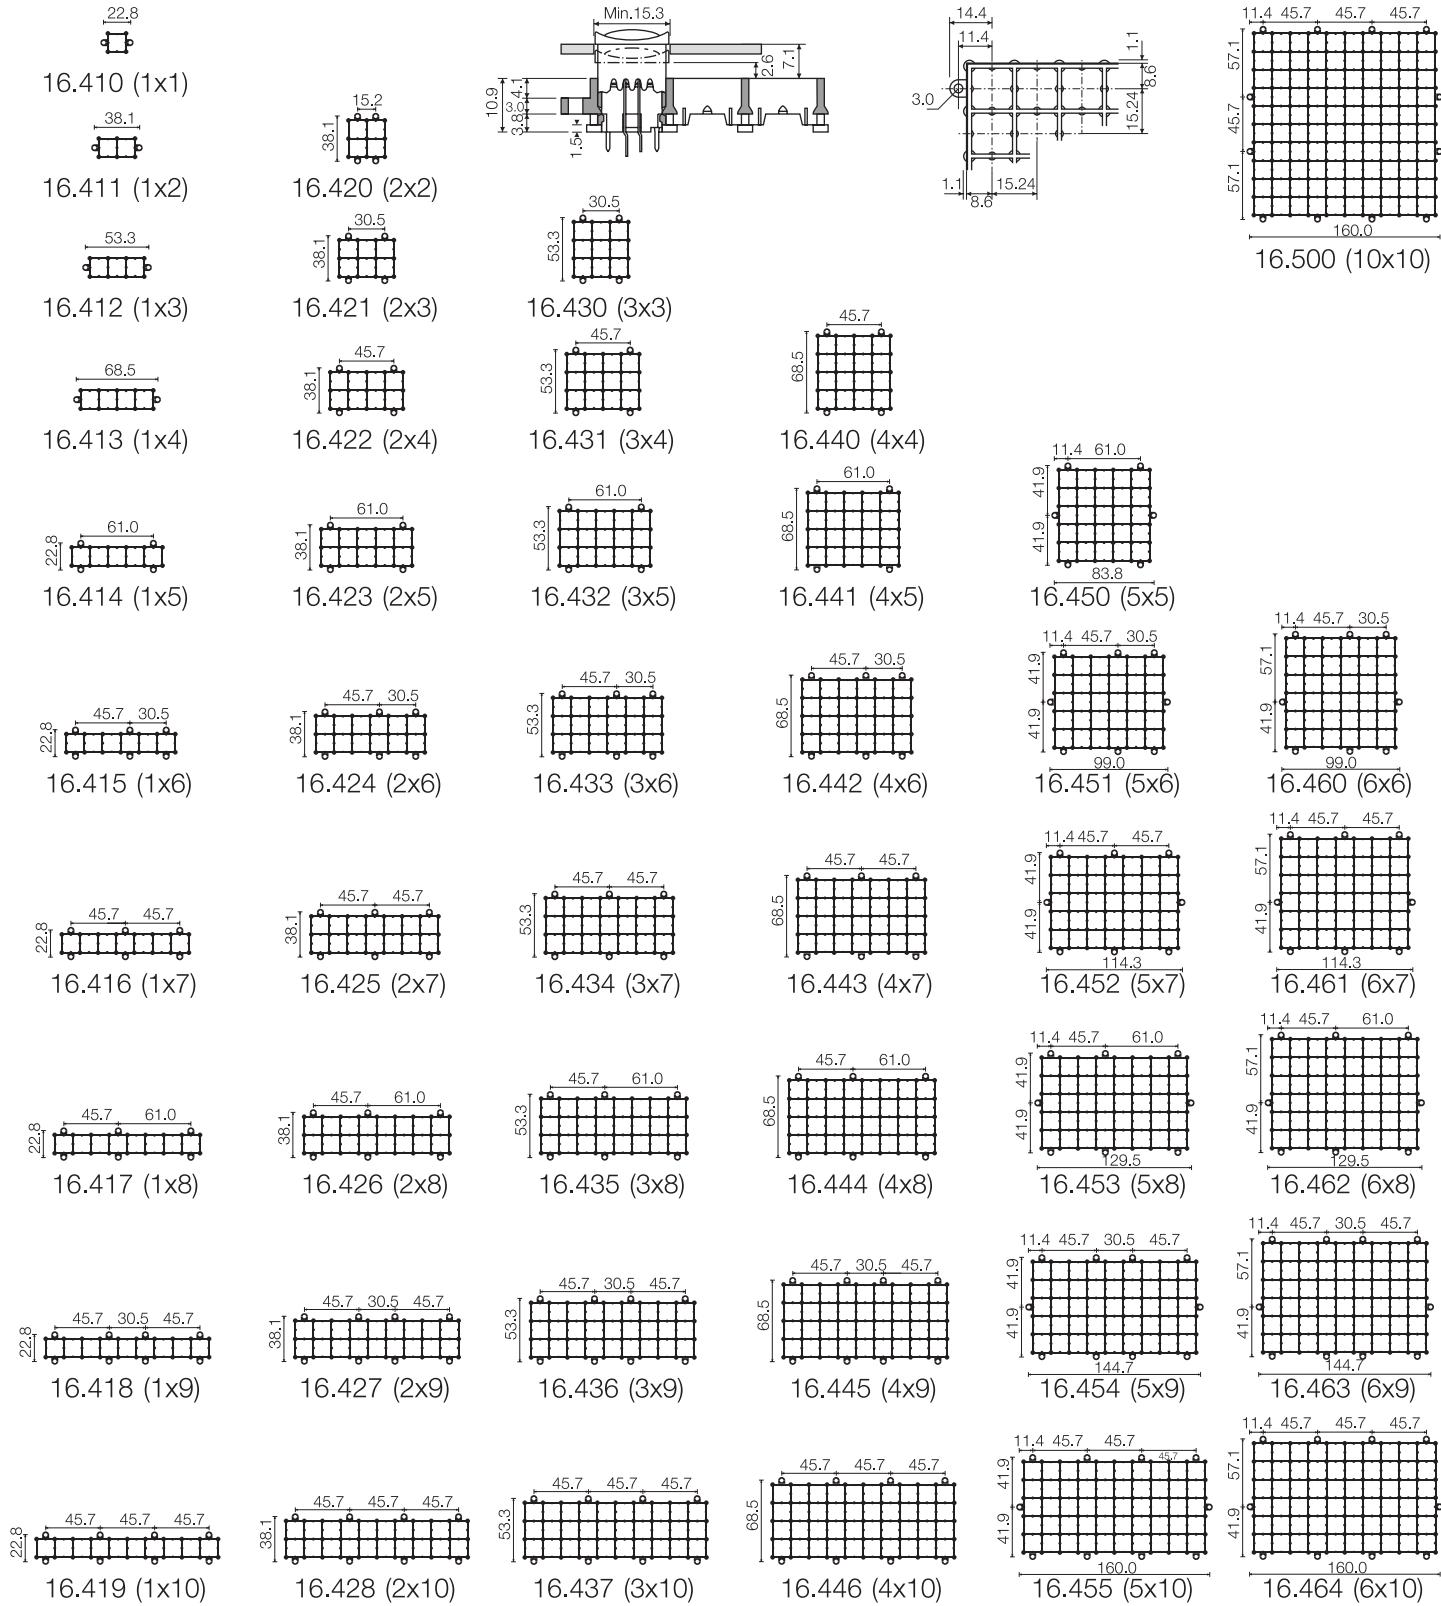

# unimec™ Legends




All standard legends are white on black caps.

The size of the legends listed may not correspond to the actual size. Please ask your local distributor, if you do not find what you need on the list. New legends may have been added after this catalogue was printed.


Custom legends and other colour combinations are available, please contact your local distributor.

## Standard Keycap Legends


Part no.



Part no.






















Part no.



LEGEND	18_	18_	LEGEND	18_	18_	LEGEND	18_	18_
0	000	200	A	010	210	ON/OFF	017	217
1	001	201	B	011	211	STOP	018	218
2	002	202	C	012	212	START	031	231
3	003	203	D	013	213	CLEAR	036	236
4	004	204	E	014	214	LOAD	037	237
5	005	205	F	015	215	RESET	038	238
6	006	206	G	063	263	CR	043	243
7	007	207	H	064	264	MANUAL	044	244
8	008	208	I	065	265	END	047	247
9	009	209	J	066	266	CANCEL	048	248
10	020	220	K	067	267	CTRL	050	250
11	021	221	L	068	268	ESC	051	251
12	022	222	M	069	269	DSP	053	253
13	023	223	N	070	270	ENTER	105	305
14	024	224	P	072	272	SHIFT	106	306
15	025	225	S	075	275	ON	116	316
16	026	226	T	076	276	OFF	117	317
			U	077	277			
			V	078	278			
			W	079	279			
			#	107	307			
			*	019	219			
			□	016	216			
			→	033	233			
			←	133	333			
			↑	034	234			
			↓	134	334			
			↔	135	335			
			↑↓	115	315			
			↔↔	041	241			
			+	054	254			
			-	059	259			
			•	056	256			
			:	055	255			

# unimec™ switches with multimec® keycaps

## Selection guide

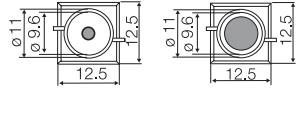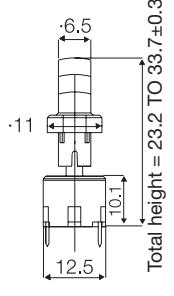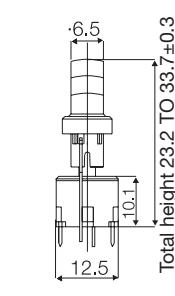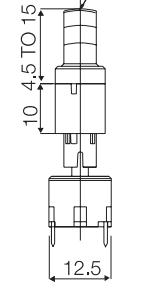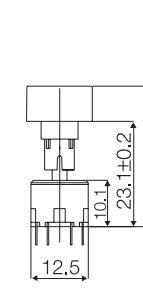A 16250 extender is needed when mounting multimec® keycaps on unimec™ switches						
Cap	1D	1E	1F	1P	1Q	1R
<b>Dimensions</b>	 	 	 	 	 	 
<b>LED</b>		16923XX 00 blue 20 green 40 yellow 80 red			16923XX 00 blue 20 green 40 yellow 80 red	
Cap	1S	1S illuminated	1S + 2S	1K	1K illuminated	
<b>Dimensions</b>	  <p>Total height = 23.2 TO 33.7±0.3</p>	  <p>Total height 23.2 TO 33.7±0.3</p>	  <p>Total height 37.2 TO 43.7±0.3</p>	 	 	
<b>LED</b>		16923XX 00 blue 20 green 40 yellow 80 red		16923XX 00 blue 20 green 40 yellow 80 red		16924XX 23 green 45 yellow 88 red



For specific dimensions, color codes, how to order and other information please refer to the pages with the keycaps on multimec® switches. For technical information on the unimec™ basic switches please see technical specifications or go to our website [www.mec.dk](http://www.mec.dk) where you will find a page for each option.

The multimec® keycaps 1N, 1T, 1U, 1V, 1WA, 1WD, 1WP and 1X can also be used on unimec™ switches. Please ask for technical drawings on dimensions.


# unimec™ basic switch modules

## Basic module applies to all versions

Low temp.

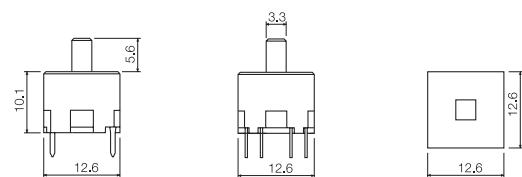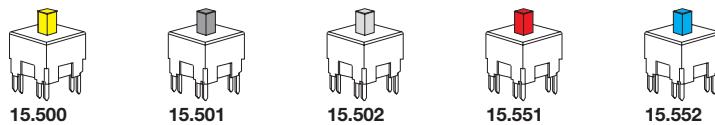

High temp.

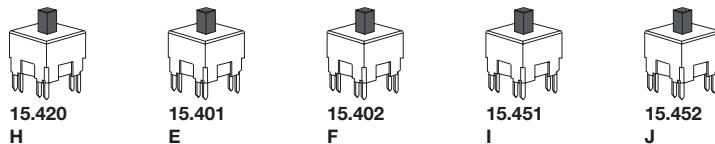

Part no:

1 5

Temperature:


5: low temp.  
4: high temp.

Switch function:

0: momentary  
5: alternate

Terminal


1: silver  
2: gold  
0: quiet version, silver

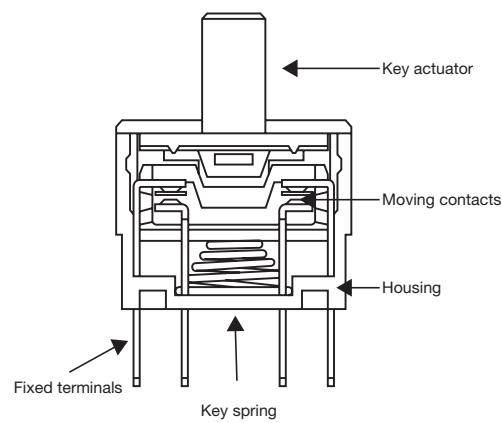

PCB Mounting Hole Dimensions Basic Switch	Circuit diagram (topview)	PCB Mounting Hole Dimensions (w/Extender 16250)	Functional diagram
<p>PCB Mounting Hole Dimensions Basic Switch</p> <p>PCB dimensions: 2.54mm x 2.54mm</p> <p>Hole diameter: Ø 0.9mm</p>	<p>Circuit diagram (topview) showing contact configurations for:          - Without LED: 1, 2, 3, 4, 5, 6, 7, 8          - With round LED 16920 and 16921: 1+, 2-, 3+, 4-, 5+, 6-, 7+, 8+          - With rect. LED 16922: 1+, 2-, 3+, 4-, 5+, 6-, 7+, 8+          - With LED 16923 and 16924: 1+, 2-, 3+, 4-, 5+, 6-, 7+, 8+</p>	<p>PCB Mounting Hole Dimensions (w/Extender 16250)</p> <p>PCB dimensions: 13.1mm x 3.0mm</p> <p>Hole diameter: Ø 0.9mm</p>	<p>Functional diagram showing contact configurations:          - up: 1, 2, 3, 4, 5, 6, 7, 8          - down: 1, 2, 3, 4, 5, 6, 7, 8</p>

## Wiring Diagram


Select the contact function you desire - and design your PC board accordingly

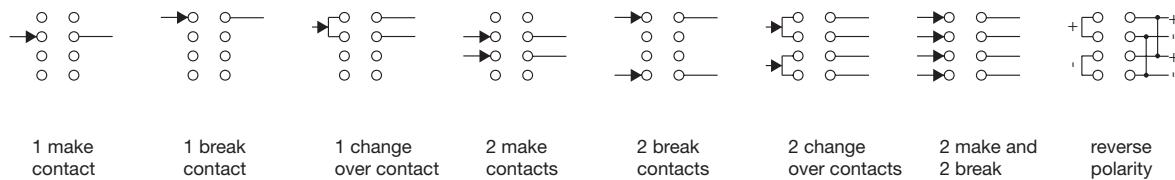

## How to assemble


unimec™

15XXX + 16300 +  
16310

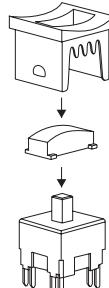


unimec™

15XXX + 16270 +  
16300 + 16324

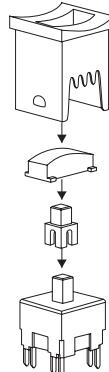

## Operating Force (Typical example)

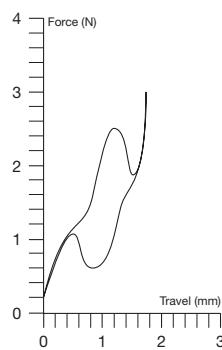

### RoHS Compatible

	RB			RA		
	Low Temperature Versions			High Temperature Versions		
	Silver	Gold		Silver	Gold	
<b>Electrical Specifications</b>						
Contact resistance	Max. 100 m Ω (initially)			Max. 100 m Ω (initially)		
Insulation resistance	>10 M Ω			>10 M Ω		
Recommended load	Min. 0.5 mA	Min. 0.5μ A		Min. 0.5 mA	Min. 0.5μ A	
	Max. 250 mA - 120 V - 9W AC - 6W DC			Max. 250 mA - 120 V - 9W AC - 6W DC		
Max. current in non switching state	0.5 A			0.5 A		
Contact bounce	Max. 10 ms			Max. 10 ms		
Dielectric strength between adjacent contacts	1000 V for 2 min.			1000 V for 2 min.		
Insulation resistance between adjacent contacts	5 X 10 <sup>13</sup> Ω			5 X 10 <sup>13</sup> Ω		
Capacitance between adjacent contacts	0.5 pF			0.5 pF		
<b>Mechanical Specifications</b>						
Standard actuation force (switch)	typ 2.5N			typ 2.5N		
Max. actuation force without cap	100N for 10 sec.			100N for 10 sec.		
Key travel (switch)	1.8 mm			1.8 mm		
Life time	Momentary 1.500.000 cycles			Momentary >10.000.000 cycles		
	Alternate 500.000 cycles			Alternate 5.000.000 cycles		
<b>Temperature Range</b>						
Working temperature	Min. -40°C Max. +75°C			Min. -40°C Max. +160°C		
Storage temperature	Min. -65°C Max. +85°C			Min. -65°C Max. +160°C		
<b>Soldering IEC 68-2-20</b>						
	Wave - max 260°C for max. 10 sec., please refer to usage guidelines			Soldering iron - max. 350°C for max. 3 sec. Flux tight.		
<b>Environmental Endurance IEC 68-2-3</b>						
Temperature	+40°C			+40°C		
Humidity	93% RH			93% RH		
Duration	56 Days			56 Days		
Sealing IEC 529	IP-54			IP-54		
Cleaning	Standard methods such as water and soap (not immersed)			Standard methods such as water and soap (not immersed)		
<b>Material Specifications - Switches</b>						
Housing and actuator	Glass fiber filled Polycarbonate UL94V1			LCP UL94V0		
Switch spring	Stainless steel			Stainless steel		
Key spring	Stainless steel			Stainless steel		
Latch pin	Stainless steel			Stainless steel		
Fixed contact	SnCu + 2μNi + 3μAg		SnCu + 2μNi + 3μAu		SnCu + 2μNi + 3μAg	SnCu + 2μNi + 3μAu
Moving contact	Stainless steel + 3μAg		Stainless steel + 3μAg+1μAu		Stainless steel +3μAg	Stainless steel + 3μAg+1μAu
<b>Terminals</b>	SnCu + 2μNi + 3μSn100			SnCu + 2μNi + 3μSn100		
Contact lubricant	Special protective lubricant Klüber Barrierta I EL Fluid			Special protective lubricant Klüber Barrierta I EL Fluid		
<b>Material Specifications - All Caps &amp; Bezels</b>						
Temperature limit	ABS (standard) UL94HB			ABS (standard) UL94HB		
Tampon Printing	Max. +65°C			Max. +65°C		
	According to ISO Class: 1/ASTM Class.: 4B			According to ISO Class: 1/ASTM Class.: 4B		

### unimec™ LEDs

Part Nos.	16920/16921			16922			16923			16924				
Colour (G= Green, Y= Yellow, R= Red)	G	Y	R	G	Y	R	G	Y	R	G	Y	R		
Color Codes	02	04	08	02	04	08	20	40	80	23	45	88		
<b>Absolute Maximum Ratings</b> (Ta=25°C)														
Power	mW	100	100	100	135	135	135	70	60	60	150	130	300	
Current forward	mA	30	30	30	30	30	20	20	20	40	40	90		
Forward peak current	mA	50	50	50	90	90	90	60**	60**	60**	500	500	1000	
Voltage reverse	V	5	5	5	5	5	3	3	3	12	12	5		
Operating temperature	°C	-25 - +100			-55 - +100			-25 - +85			-55 - +100			
Storage temperature	°C	-25 - +100			-55 - +100			-30 - +100			-55 - +100			
Soldering temperature	°C	+245 for max. 3 sec.			+300 for max. 3 sec.			+260 for max. 5 sec.			+300 for max. 3 sec.			
<b>Electrical-Optical Characteristics</b> (Ta=25°C)														
Voltage Forward	Typ. V	2.0	2.0	2.0	2.1	2.2	2.3	2.1	2.1	2.0	2.1*	2.3***	2.4***	
	Max. V	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	2.5*	2.5***	3.8***	
Current reverse	μA	100	100	100	100	100	100	10	10	10	10	10	10	
Wave length	nm	560	590	660	565	585	635	563	585	650	570	587	635	
Spread	Ønm	10	10	10	10	10	10	40	40	40	25	45	45	
Spread angle	degree	20	20	20	45	45	45	45	45	45	80	90	55	
<b>Luminous Intensity</b>		Min. mcd	1	1	0.8	1.5	2.5	2.5	9.0	5.6	5.6	71****	71****	100****
	Typ. mcd	2	3	1.6	2.5	3.0	5.0	25	16	16	112****	112****	160****	
Orientation	The longer pin is the anode, the shorter is the cathode.													

\*F = 20mA, \*\*Pulse width 1ms Duty cycle 1:5, \*\*\*F= 50mA, \*\*\*\*Luminous Flux mlm

Specifications are subject to change without notice.

# mec Usage Guidelines

## How to get the best results with **mec** switches

These guidelines are offered to users of **mec** switches as an aid to ensure successful and reliable switch operation.

### Temperature

Both Unimec™ and Multimec® switches are produced in standard and high temperature versions. Please see the technical specifications for details on operating and storage temperatures and soldering guidelines to make sure you select the best switch for your application. When wave soldering is taking place, **mec** strongly recommend that the temperature profile is analyzed and compared with the temperature rating of the switch. In case of doubt always select the high temperature versions Unimec™ 154XX and Multimec® 3XXH. It is also important to monitor the accumulated heat build up from both the pre-heat zones and the solder zone.

Most standard accessories for both Unimec™ and Multimec® switches are made from ABS plastic with a maximum operating temperature of 65°C. It is strongly recommended that accessories are mounted after soldering of the switch. If this is not possible care must be taken not to overheat the accessories during the soldering process. Actuators for the 3EXX9, the 1S09 and Varimec™ caps are, however, made of high temperature materials and will meet the same temperature specifications as the high temperature switches.

For accessories made from other plastic materials please see Multimec and Unimec technical specifications.

LEDs have their own temperature specifications. When fitted in a high temperature switch the LED will determine the max. operating temperature, i.e. 3FTH923 has an upper temperature limit of 85°C – not 160°C! This also applies to the 4A and 4F switches.

### Mounting and Dismounting

If switches are to be mounted in rows it is essential that the recommendations regarding spacing are followed. PC board thickness should be 1.2 to 1.6 mm and terminal hole diameter should be 0.9 mm.

All Unimec™ and Multimec® caps and bezels are easily snapped onto the switch modules and can be changed at a later time with the exception of the Unimec™ 16.700 cap. The same applies to the 3E caps/actuators. Once these caps are installed they are not designed to be removed. To do so may cause damage to the switch and the PC board if not done very carefully. If the 16.300 or 16.700 cap must be removed from a Unimec™ alternate action switch, make sure that the switch actuator is in the released, upper position before attempting to remove the cap. This will prevent possible damage to the internal latching pin.

Care must be taken when inserting the 3FT switch and LED assembly into the PC board. Do not press direct on the LED. This will force the LED down into the actuator and risks to cause the switch contacts to remain in the closed position. To correct the fault, the LED must be raised slightly and centered in the actuator to assure unrestricted movement of the actuator. A mounting tool is available for Multimec® switches.

### Soldering and Cleaning Unimec™

Most assembly and field problems experienced by users of unsealed switches are caused by the contamination of the contacts during soldering and cleaning.

Contact contamination may be recognized by an increase in contact resistance and possible intermittent operation of the switch, especially in low power applications. Care must be taken not to submerge the switch in cleaning agents or spray the switch during cleaning. The switch must be protected at all times to prevent contamination by flux or cleaning liquids.

For Unimec™ alternate versions we recommend to leave the actuator in the released upper position during soldering. This makes the switch more resistant to overheating.

### Soldering and Cleaning Multimec®

Multimec® switches are fully sealed to IP67 specifications to prevent solder flux and aqueous or solvent based cleaning solutions from entering the switch and contaminating the contacts. The switches can be placed on the PC board with other components and wave soldered. Multimec® offers a high level of sealing, however, with aqueous solvent solutions care must be taken to avoid the worst case situation with water jets, complete immersion into a liquid with a temperature below the board or surface tension reducing additives.

Recommended cleaning methods are demineralized water. Any surface tensions reducing agents, such as soap, must not be used as they risk causing a potential leakage of the switch.

### Soldering - Through Hole Versions

Hand soldering: Max 350°C for max. 3 sec., this applies for both low temperature and high temperature versions.

Wave soldering: Heat built up in the switch during pre-heating and soldering must not exceed the maximum operating temperature of the switch. If, for some reason, a high pre-heating temperature is required, **mec** recommend the high temperature switches. In any case peak temperature must not exceed 260°C, and soldering time is max. 10 sec.

### Soldering - Surface Mount Versions

For all methods – infrared, convection and vapour phase. The upper limit 260°C/30 sec. must be observed. The soldering temperature profile must have moderate temperature gradients.

### RoHS Compliance

As of 1 July 2006 **mec** has completed the conversion to RoHS compliance. A separate part number system assures that there will not be any risk for mixing products in the supply chain. For more info please see our homepage [www.mec.dk](http://www.mec.dk)

### General Temperature Limits:

Low Temperature	115°C
High Temperature	160°C
LEDs	85/100°C
Accessories	65/85/160°C

### Packaging

Unimec™ and Multimec® switches are packed in rigid tubes of 50 pieces each.

A box contains 1.000 pcs.

The surface mount versions of Multimec® switches with a height up to 12.5 mm can also be delivered on tape/reel. Each reel contains 250/500 pcs.

# Custom Products from Conception to Completion

mec are mastering all technologies for the design and manufacture of switches and accessories. The wide range of mec standard products is well known world wide, but also many custom solutions have been created. mec offer to be your partner from conception to completion. Our R/D engineers generate computer animated solutions, rapid prototypes and manage the whole industrialisation process.

We welcome any custom requirement.



- Navigation module
- Cap with concave surface
- Fluorescent legends
- Different actuation forces
- Reverse printed legend on translucent cap

- Quiet switches with and without tactile feeling
- Cap colours matched to customer's request
- Right angle switches with integrated illumination
- Customer specified ultra bright LED
- Ultra high temperature Cap

Please consult factory with your custom requirement.

# SWITCHES

## DISTRIBUTOR

### MANUFACTURER

#### mec a/s

Industriparken 23  
DK-2750 Ballerup  
Denmark

Phone: (+45) 44 97 33 66  
Fax: (+45) 44 68 15 14  
E-mail: danmec@mec.dk  
Web: www.mec.dk

