
REVISION K

RECOMMENDED PCB LAYOUT FOR QTE-XXX-XX-X-D-XXX (-01,-02,-03,-07,-08,-09, -10)

12/8/2019 ECN-372633

TABLE 1		
OPTION	"A"	"B"
-SD	.100[2.54]	.225[5.72]
-RT1	.075[1.91] PTH TYP	.341[8.66]

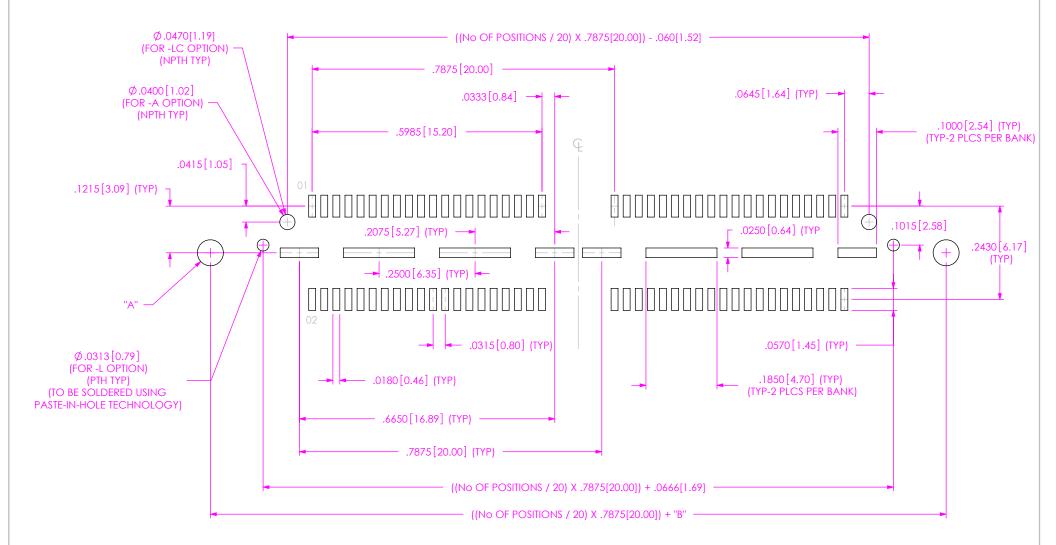

K NOTES:

ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINE.


 FOR APPLICATIONS OF -08 LEAD STYLE OPTION REQUIRING INVERTED REFLOW SOLDERING, USE OF AN EPOXY ADHESIVE IS RECOMMENDED. PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONTRIBUTED THAT AND
PROPRIETARY INFORMATION AND ALL DESIGN.

MANUFACTURING, BEPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, NW LED
OR PART, TO ANY UNALUTHORIZED PERSON OR ENTITY NOW
PERPODUCED, TRANSFERRED OR INCOPPORATED IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMTEC, IN



NOTE: STENCIL TO BE .0060[.152] THICK.

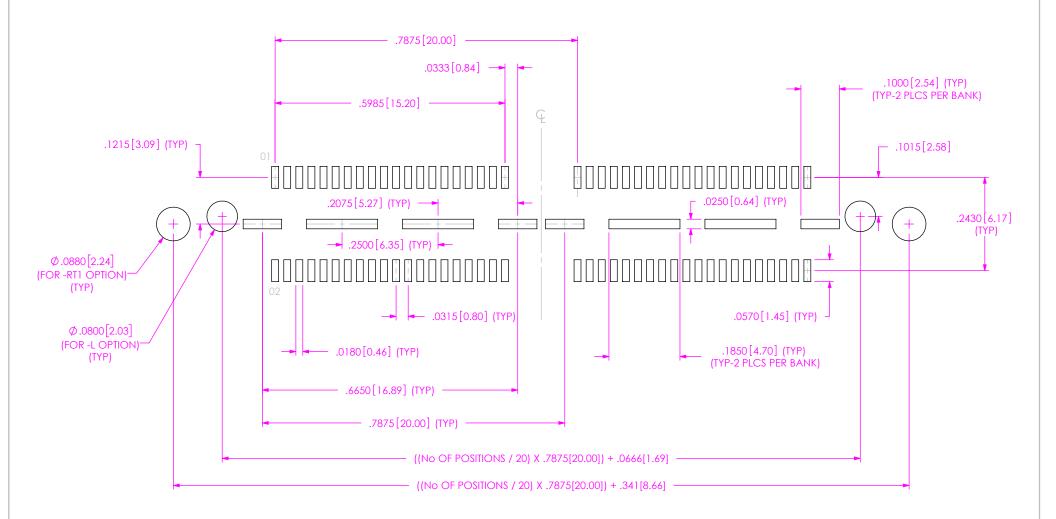

ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINE.

* PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESTLY RESERVED BY SAMTEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNALFOREZED PIESTON OR ENTITY NOR
REPRODUCED, THANSFERRED OR INCORPORATED IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENTO OF SAMTE, INC.

