


Part Number: GC3396
Reed Switch - Compact - Change-Over Contacts
Product Data Sheet

9.6 mm

PICTURE



DIMENSIONS

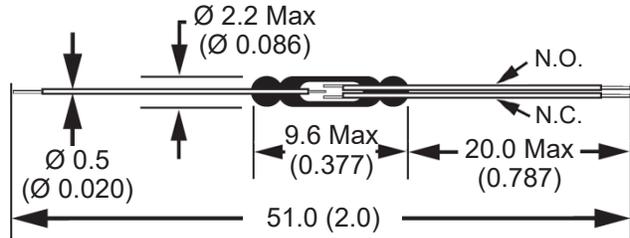

Drawings not to scale. All dimensions in mm (inches).

✓RoHS Compliant


SPECIFICATION

Contact Form		Change-Over
Contact Material		Rhodium
Switching Capacity	Max.	3 VA
Switching Voltage	Max.	50 VAC/DC
Switching Current	Max.	0.2 A
Carrying Current	Max.	0.5 A
Dielectric Strength	Min.	100 VAC/DC
Contact Resistance	Max.	150 mΩ
Insulation Resistance	Min.	10 ⁹ Ω
Pull - In Sensitivity		15 - 25 AT
Drop - Out Sensitivity	Min.	5 AT
Operate Time	Typ.	2.5 ms
Bounce Time	Typ.	0.6 ms
Release Time (without diode)	Typ.	0.02 ms
Operating Frequency	Max.	100 Hz
Vibration (50-2000Hz)	Max.	30 G
Shock (11 ms)	Max.	50 G
Capacitance	Typ.	0.8 pF
Operate Temperature Range		-40°C + 130°C
Test Coil	Type	1035

NOTE

When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (.118 in.) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.

ORDERING INFORMATION

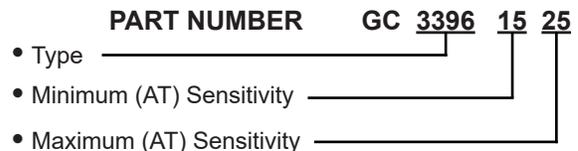

Example: Type 3396 Standard Sensitivity.
 Pull-in sensitivity between 15-25 AT is **PART NO: 3396 15 25**.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900 www.comus-intl.com Fax: (1) 973 777 8405