



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE4584B **Integrated Circuit** **CMOS, Hex Schmitt Trigger**

Description:

The NTE4584B is a Hex Schmitt Trigger in a 14-Lead DIP type package constructed with MOS P-Channel and N-Channel enhancement mode devices in a single monolithic structure. This device finds primary use where low power dissipation and/or high noise immunity is desired. The NTE4584B may be used in place of the NTE4069 hex inverter for enhanced noise immunity to “square up” slowly changing waveforms.

Features:

- Supply Voltage Range = 3Vdc to 18Vdc
- Capable of Driving Two Low-Power TTL Loads or One Low-Power Schottky TTL Load Over the Rated Temperature Range
- Double Diode Protection on All Inputs
- Can Be Used to Replace NTE4069

Absolute Maximum Ratings: (Voltages Referenced to V_{SS}, Note 1)

DC Supply Voltage Range, V _{DD}	-0.5 to +18.0V
Input Voltage (DC or Transient), V _{in}	-0.5 to V _{DD} to +0.5V
Output Voltage (DC or Transient), V _{out}	-0.5 to V _{DD} to +0.5V
Input Current (DC or Transient, Per Pin), I _{in}	±10mA
Output Current (DC or Transient, Per Pin), I _{out}	±10mA
Power Dissipation (Per Package), P _D	500mW
Temperature Derating (from +65° to +125°C)	-7.0mW/°C
Ambient Temperature Range, T _A	-55° to +125°C
Storage Temperature Range, T _{stg}	-65° to +150°C
Lead Temperature (During Soldering, 8sec max), T _L	+260°C

Note 1. Stresses exceeding Absolute Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

This device contains circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid application of any voltage higher than maximum rated voltages to this high impedance circuit. For proper operation, V_{in} and V_{out} should be constrained to the range V_{SS} ≤ (V_{in} or V_{out}) ≤ V_{DD}.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either V_{SS} or V_{DD}). Unused outputs must be left open.

Electrical Characteristics: (Voltages referenced to V_{SS}, Note 2)

Parameter	Symbol	V _{DD} Vdc	−55°C		+25°C			+125°C		Unit
			Min	Max	Min	Typ	Max	Min	Max	
Output Voltage V _{in} = V _{DD}	V _{OL}	5.0	—	0.05	—	0	0.05	—	0.05	Vdc
		10	—	0.05	—	0	0.05	—	0.05	Vdc
		15	—	0.05	—	0	0.05	—	0.05	Vdc
	V _{OH}	5.0	4.95	—	4.95	5.0	—	4.95	—	Vdc
		10	9.95	—	9.95	10	—	9.95	—	Vdc
		15	14.95	—	14.95	15	—	14.95	—	Vdc
Output Drive Current (V _{OH} = 2.5Vdc) (V _{OH} = 4.6Vdc) (V _{OH} = 9.5Vdc) (V _{OH} = 13.5Vdc)	I _{OH}	5.0	−3.0	—	−2.4	−4.2	—	−1.7	—	mA
		5.0	−0.64	—	−0.51	−0.88	—	−0.36	—	mA
		10	−1.6	—	−1.3	−2.25	—	−0.9	—	mA
		15	−4.2	—	−3.4	−8.8	—	−2.4	—	mA
	I _{OL}	5.0	0.64	—	0.51	0.88	—	0.36	—	mA
		10	1.6	—	1.3	2.25	—	0.9	—	mA
		15	4.2	—	3.4	8.8	—	2.4	—	mA
Input Current	I _{in}	15	—	±0.1	—	±0.00001	±0.1	—	±0.1	μA
Input Capacitance (V _{IN} = 0)	C _{in}	—	—	—	—	5.0	7.5	—	—	pF
Quiescent Current (Per Package)	I _{DD}	5.0	—	0.25	—	0.0005	0.25	—	7.5	μA
		10	—	0.5	—	0.0010	0.5	—	15	μA
		15	—	1.0	—	0.0015	1.0	—	30	μA
Total Supply Current (Dynamic plus Quiescent, Per Package, C _L = 50pF, on All Outputs, All Buffers Switching (Note 3, Note 4))	I _T	5.0	I _T = (1.8μA/kHz) f + I _{DD}						μA	
		10	I _T = (3.6μA/kHz) f + I _{DD}						μA	
		15	I _T = (5.4μA/kHz) f + I _{DD}						μA	
Hysteresis Voltage (Note 5)	V _H	5.0	0.27	1.0	0.25	0.6	1.0	0.21	1.0	Vdc
		10	0.36	1.3	0.3	0.7	1.2	0.25	1.2	Vdc
		15	0.77	1.7	0.6	1.1	1.5	0.50	1.4	Vdc
Threshold Voltage Positive Going	V _{T+}	5.0	1.9	3.5	1.8	2.7	3.4	1.7	3.4	Vdc
		10	3.4	7.0	3.3	5.3	6.9	3.2	6.9	Vdc
		15	5.2	10.6	5.2	8.0	10.5	5.2	10.5	Vdc
Negative Going	V _{T−}	5.0	1.6	3.3	1.6	2.1	3.2	1.5	3.2	Vdc
		10	3.0	6.7	3.0	4.6	6.7	3.0	6.7	Vdc
		15	4.5	9.7	4.6	6.9	9.8	4.7	9.9	Vdc

Note 2. Data labeled “Typ” is not to be used for design purposes but is intended as an indication of the device’s potential performance.

Note 3. The formulas given are for the typical characteristics only at +25°C.

Note 4. To calculate total supply current at loads other than 50pF:

$$I_T(C_L) = I_T(50\text{pF}) + (C_L - 50) Vfk$$

where: I_T is in μA (per package), C_L in pF, V = (V_{DD} − V_{SS}) in volts, f in kHz is input frequency, and k = 0.001..

Note 5. V_H = V_{T+} − V_{T−} (But maximum variation of V_H is specified as less than V_{T+}max − V_{T−}min).


Switching Characteristics: ($C_L = 50\text{pF}$, $T_A = +25^\circ\text{C}$, Note 2)

Parameter	Symbol	V_{DD} V_{dc}	Min	Typ	Max	Unit
Output Rise and Fall Times	t_{TLH}, t_{THL}	5.0	-	100	200	ns
		10	-	50	100	ns
		15	-	40	80	ns
Propagation Delay Time	t_{PLH}, t_{PHL}	5.0	-	125	250	ns
		10	-	50	100	ns
		15	-	40	80	ns

Note 2. Data labeled "Typ" is not to be used for design purposes but is intended as an indication of the device's potential performance.

Note 3. The formulas given are for the typical characteristics only at $+25^\circ\text{C}$.

Logic Diagram

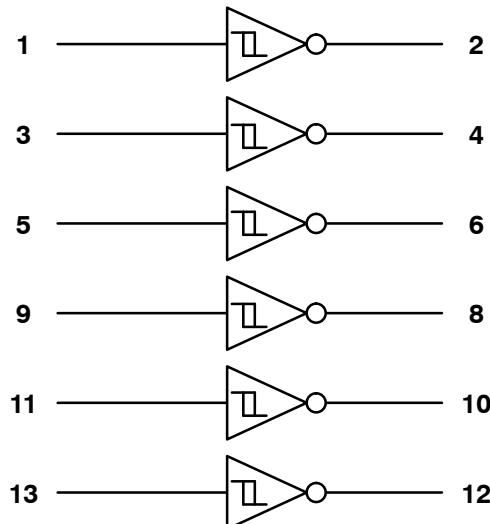

$V_{DD} = \text{Pin}14$
 $V_{SS} = \text{Pin}7$

Pin Connection Diagram

