



### FEATURES:

- Capacitance range: 0.5pF to 2.2uF
- Voltage range: 200V to 5000V
- Ceramic monolithic structure provides excellent reliability
- High-speed automated placement capabilities



### PART NUMBER STRUCTURE

C	1808	X7R	202	-	102	K	N	E
Ceramic Capacitor	Size 0603 0805 1206 1210 1808 1812 1825 2220 2225	Temperature Characteristic (Dielectric) COG X7R	Rated Voltage 1st two digits are significant followed by number of zeroes. 201 = 200V 251 = 250V 501 = 500V 601 = 600V 631 = 630V 102 = 1000V 202 = 2000V 302 = 3000V 402 = 4000V 502 = 5000V		Capacitance (picofarads) 1st two digits are significant, followed by number of zeroes. R denotes decimal e.g: 101 = 100pF R denotes decimal 6R8 = 6.8pF	Tolerance *C = ± 0.25pF *D = ± 0.50pF F = ± 1% G = ± 2% J = ± 5% K = ± 10% M = ± 20% N = ± 30% * For values below 10pF only.	Termination N = 100% matte Tin (Sn) over nickel. P = Palladium Silver S = Arc Prevention Coating	Packaging E = Embossed Tape

Example P/N: C1808X7R202-102KNE

Standard termination finish is 100% matte Tin (Sn).


### DIMENSIONS

Unit: inch (mm)				
SIZE	L	W	T	E/B
0603	0.063 ± 0.0078 (1.60 ± 0.20)	0.0315 ± 0.0078 (0.80 ± 0.20)	See Specific Value	0.0158 ± 0.006 (0.40 ± 0.15)
0805	0.079 ± 0.0078 (2.00 ± 0.20)	0.05 ± 0.0078 (1.25 ± 0.20)	See Specific Value	0.020 ± 0.0078 (0.50 ± 0.20)
1206	0.130 ± 0.012 (3.30 ± 0.30)	0.063 ± 0.0078 (1.60 ± 0.20)	See Specific Value	0.0236 ± 0.0078 (0.60 ± 0.20)
1210	0.130 ± 0.0158 (3.30 ± 0.40)	0.0985 ± 0.012 (2.50 ± 0.30)	See Specific Value	0.0295 ± 0.0138 (0.75 ± 0.35)
1808	0.177 ± 0.0158 (4.50 ± 0.40)	0.080 ± 0.0098 (2.03 ± 0.25)	See Specific Value	0.0295 ± 0.0138 (0.75 ± 0.35)
1812	0.177 ± 0.0158 (4.50 ± 0.40)	0.126 ± 0.0158 (3.20 ± 0.40)	See Specific Value	0.0295 ± 0.0138 (0.75 ± 0.35)
1825	0.177 ± 0.0158 (4.50 ± 0.40)	0.252 ± 0.0158 (6.40 ± 0.40)	See Specific Value	0.0295 ± 0.0138 (0.75 ± 0.35)
2220	0.225 ± 0.0158 (5.70 ± 0.40)	0.197 ± 0.0158 (5.00 ± 0.40)	See Specific Value	0.0335 ± 0.0138 (0.85 ± 0.35)
2225	0.225 ± 0.0158 (5.70 ± 0.40)	0.248 ± 0.0158 (6.30 ± 0.40)	See Specific Value	0.0335 ± 0.0138 (0.85 ± 0.35)

### ELECTRICAL SPECIFICATION

#### COG (NPO)

##### Typical Capacitance Change vs. Temperature

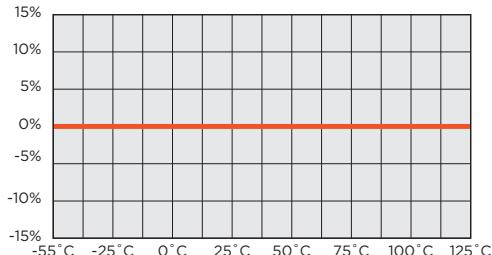

Operating Temperature Range:

-55°C to +125°C

Temperature Coefficient:

0 ±30PPM/°C

Temperature Voltage Coefficient:

0 ±30PPM/°C

Insulation Resistance:

>100 Ω-F or 10 GΩ, whichever is less at 25°C, WDCV.

(The IR at 125°C is 10% of the value at 25°C)

Withstanding Voltage:

See below

Capacitance Tolerance:


C, D, F, G, J, K

Dielectric Strength is equal to 1.5 times rated voltage (WVDC) for 500 volt capacitors and 1.2 times (WVDC) for 1,000 through 5,000 volt capacitors.

Circuit applications in excess of 1,000 volts may require a surface coating to prevent external arcing.

#### X7R

##### Typical Capacitance Change vs. Temperature

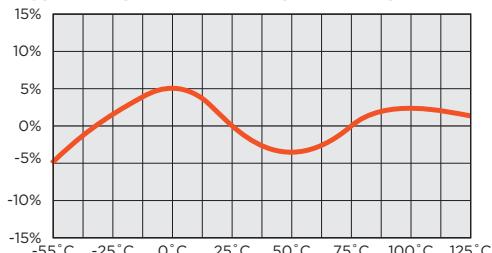

Operating Temperature Range:

-55°C to +125°C

Temperature Coefficient:

0 ±15%Δ°C MAX.

Temperature Voltage Coefficient:

X7R not applicable

Insulation Resistance:

>100 ohms F or 10 G ohms, whichever is less at 25°C, WDCV.

(The IR at 125°C is 10% of the value at 25°C)

Withstanding Voltage:

See below

D.F. Specification:

≥50V, ≤2.5%

Capacitance Tolerance:

J,K,M,N

### TEST PARAMETERS

Test parameters for Multilayer Ceramic Capacitors - X7R:

1KHz ± 50Hz at 1.0 ± 0.2 Vrms, 25°C

Test parameters for Multilayer Ceramic Capacitors - COG (NPO):


1MHz ± 50KHz at 1.0 ± 0.2 Vrms ≤ 1000pF, 25°C

1KHz ± 50Hz at 1.0 ± 0.2 Vrms > 1000pF, 25°C

**Note:** To ensure proper capacitance readings, the voltage level must be held constant. The HP4284 and Agilent E4980 has a "ALC" (Automatic Level Control) function and should be switched to the "ON" position for accurate capacitance readings.

### VOLTAGE AND CAPACITANCE RANGE

#### COG (NPO) DIELECTRIC



Values that are typically available.


All measurements in inches (mm)

SIZE	0603	0805		1206				1210			
L	0.063 ± 0.0078 (1.60 ± 0.20)	0.083 ± 0.0078 (2.10 ± 0.20)		0.130 ± 0.012 (3.30 ± 0.30)				0.130 ± 0.0158 (3.30 ± 0.40)			
W	0.0315 ± 0.0078 (0.8 ± 0.20)	0.05 ± 0.0078 (1.25 ± 0.20)		0.063 ± 0.0078 (1.60 ± 0.20)				0.0985 ± 0.012 (2.50 ± 0.30)			
T (max)	0.0394 (1.0)	0.057 (1.45)		0.075 (1.90)				0.110 (2.80)			
E/B	0.0158 ± 0.006 (0.40 ± 0.15)	0.020 ± 0.0078 (0.50 ± 0.20)		0.0236 ± 0.0078 (0.60 ± 0.20)				0.0295 ± 0.0138 (0.75 ± 0.35)			
VDCW (MAX)	200V / 250V	200V / 250V	500V	600V / 630V	200V / 250V	500V	600V / 630V	1KV	2KV	3KV	200V / 250V
OR5	0.5pF										
1R0	1.0pF										
1R2	1.2pF										
1R5	1.5pF										
1R8	1.8pF										
2R0	2.0pF										
2R2	2.2pF										
2R7	2.7pF										
3R3	3.3pF										
3R9	3.9pF										
5R0	5.0pF										
8R2	8.2pF										
100	10pF										
120	12pF										
150	15pF										
180	18pF										
220	22pF										
270	27pF										
330	33pF										
390	39pF										
470	47pF										
560	56pF										
680	68pF										
820	82pF										
101	100pF										
121	120pF										
151	150pF										
181	180pF										
221	220pF										
271	270pF										
331	330pF										
391	390pF										
471	470pF										
561	560pF										
681	680pF										
821	820pF										
102	1000pF										
122	1200pF										
152	1500pF										
182	1800pF										
222	2200pF										
272	2700pF										
332	3300pF										
392	3900pF										
472	4700pF										
562	5600pF										
682	6800pF										
822	8200pF										
103	0.01uF										
123	0.012uF										
153	0.015uF										
183	0.018uF										
223	0.022uF										
273	0.027uF										

**Note:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

### VOLTAGE AND CAPACITANCE RANGE

#### COG (NPO) DIELECTRIC

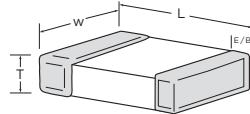

Values that are typically available.


All measurements in inches (mm)

SIZE		1808					1812					1825					
L		0.177 ± 0.0158 (4.50 ± 0.40)					0.177 ± 0.0158 (4.50 ± 0.40)					0.177 ± 0.0158 (4.50 ± 0.40)					
W		0.080 ± 0.0098 (2.03 ± 0.25)					0.126 ± 0.0158 (3.20 ± 0.40)					0.252 ± 0.0158 (6.40 ± 0.40)					
T (max)		0.90 (2.28)					0.118 (3.0)					0.128 (3.25)					
E/B		0.0295 ± 0.0138 (0.75 ± 0.35)					0.0295 ± 0.0138 (0.75 ± 0.35)					0.0295 ± 0.0138 (0.75 ± 0.35)					
VDCW (MAX)		500V	600V / 630V	1KV	2KV	3KV	5KV	200V / 250V	500V	600V / 630V	1KV	2KV	3KV	200V / 250V	500V	600V / 630V	1KV
OR5	0.5pF																
1R0	1.0pF																
1R2	1.2pF																
1R5	1.5pF																
1R8	1.8pF																
2R0	2.0pF																
2R2	2.2pF																
2R7	2.7pF																
3R3	3.3pF																
3R9	3.9pF																
5R0	5.0pF																
8R2	8.2pF																
100	10pF																
120	12pF																
150	15pF																
180	18pF																
220	22pF																
270	27pF																
330	33pF																
390	39pF																
470	47pF																
560	56pF																
680	68pF																
820	82pF																
101	100pF																
121	120pF																
151	150pF																
181	180pF																
221	220pF																
271	270pF																
331	330pF																
391	390pF																
471	470pF																
561	560pF																
681	680pF																
821	820pF																
102	1000pF																
122	1200pF																
152	1500pF																
182	1800pF																
222	2200pF																
272	2700pF																
332	3300pF																
392	3900pF																
472	4700pF																
562	5600pF																
682	6800pF																
822	8200pF																
103	0.01uF																
123	0.012uF																
153	0.015uF																
183	0.018uF																
223	0.022uF																
273	0.027uF																

**Note:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

### VOLTAGE AND CAPACITANCE RANGE

#### COG (NPO) DIELECTRIC



Values that are typically available.

All measurements in inches (mm)

SIZE		1808					1812					1825					
L		0.177 ± 0.0158 (4.50 ± 0.40)				0.177 ± 0.0158 (4.50 ± 0.40)				0.177 ± 0.0158 (4.50 ± 0.40)				0.177 ± 0.0158 (4.50 ± 0.40)			
W		0.080 ± 0.0098 (2.03 ± 0.25)				0.126 ± 0.0158 (6.40 ± 0.40)				0.252 ± 0.0158 (5.00 ± 0.40)				0.252 ± 0.0158 (5.00 ± 0.40)			
T (max)		0.90 (2.28)				0.118 (3.0)				.122 (3.10)				.122 (3.10)			
E/B		0.0295 ± 0.0138 (0.75 ± 0.35)				0.0295 ± 0.0138 (0.75 ± 0.35)				0.0295 ± 0.0138 (0.75 ± 0.35)				0.0295 ± 0.0138 (0.75 ± 0.35)			
VDCW (MAX)		500V	600V / 630V	1KV	2KV	3KV	5KV	200V / 250V	500V	600V / 630V	1KV	2KV	3KV	200V / 250V	500V	600V / 630V	1KV
<CAPACITANCE CODE>	333	0.033uF															
	393	0.039uF															
	473	0.047uF															
	563	0.056uF															
	683	0.068uF															
	104	0.10uF															
	124	0.12uF															


All measurements in inches (mm)

SIZE		2220					2225				
L		0.225 ± 0.0158 (5.70 ± 0.40)				0.225 ± 0.0158 (5.70 ± 0.40)					
W		0.197 ± 0.0158 (5.00 ± 0.40)				0.248 ± 0.0158 (6.30 ± 0.40)					
T (max)		0.128 (3.25)				0.145 (3.68)					
E/B		0.0335 ± 0.0138 (0.85 ± 0.35)						0.0335 ± 0.0138 (0.85 ± 0.35)			
VDCW (MAX)		200V / 250V	500V	600V / 630V	1KV	5KV	200V / 250V	500V	600V / 630V	1KV	
& CAPACITANCE CODE	OR5	0.5pF									
	1R0	1.0pF									
	1R2	1.2pF									
	1R5	1.5pF									
	1R8	1.8pF									
	2R0	2.0pF									
	2R2	2.2pF									
	2R7	2.7pF									
	3R3	3.3pF									
	3R9	3.9pF									
	5R0	5.0pF									
	8R2	8.2pF									
	100	10pF									
	120	12pF									
	150	15pF									
	180	18pF									
	220	22pF									
	270	27pF									
	330	33pF									
	390	39pF									
	470	47pF									
	560	56pF									
	680	68pF									
	820	82pF									
	101	100pF									
	121	120pF									
	151	150pF									
	181	180pF									
	221	220pF									
	271	270pF									
	331	330pF									
	391	390pF									
	471	470pF									
	561	560pF									
	681	680pF									
	821	820pF									

**Note:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

### VOLTAGE AND CAPACITANCE RANGE

#### COG (NPO) DIELECTRIC



 Values that are typically available.

All measurements in inches (mm)

SIZE		2220					2225				
L		0.225 ± 0.0158 (5.70 ± 0.40)					0.225 ± 0.0158 (5.70 ± 0.40)				
W		0.197 ± 0.0158 (5.00 ± 0.40)					0.248 ± 0.0158 (6.30 ± 0.40)				
T (max)		0.128 (3.25)					0.145 (3.68)				
E/B		0.0335 ± 0.0138 (0.85 ± 0.35)					0.0335 ± 0.0138 (0.85 ± 0.35)				
VDCW (MAX)		200V / 250V	500V	600V / 630V	1KV	5KV	200V / 250V	500V	600V / 630V	1KV	
CAPACITANCE CODE	102	1000pF									
	122	1200pF									
	152	1500pF									
	182	1800pF									
	222	2200pF									
	272	2700pF									
	332	3300pF									
	392	3900pF									
	472	4700pF									
	562	5600pF									
	682	6800pF									
	822	8200pF									
	103	0.01uF									
	123	0.012uF									
	153	0.015uF									
	183	0.018uF									
	223	0.022uF									
	273	0.027uF									
	333	0.033uF									
	393	0.039uF									
	473	0.047uF									
	563	0.056uF									
	683	0.068uF									
	104	0.10uF									
	124	0.12uF									

#### X7R DIELECTRIC


All measurements in inches (mm)

SIZE		0603	0805			1206					1210					
L		0.063 ± 0.0078 (1.60 ± 0.20)	0.079 ± 0.0078 (2.00 ± 0.20)			0.130 ± 0.012 (3.30 ± 0.30)					0.130 ± 0.0158 (3.30 ± 0.40)					
W		0.0315 ± 0.0078 (0.80 ± 0.20)	0.05 ± 0.0078 (1.27 ± 0.20)			0.063 ± 0.0078 (1.60 ± 0.20)					0.0985 ± 0.012 (2.50 ± 0.30)					
T (max)		0.0315 ± 0.0078 (0.80 ± 0.20)	0.057 (1.45)			0.063 ± 0.0078 (1.60 ± 0.20)					0.0985 ± 0.0197 (2.50 ± 0.50)					
E/B		0.0158 ± 0.006 (0.40 ± 0.15)	0.020 ± 0.0078 (0.50 ± 0.20)			0.0236 ± 0.0078 (0.60 ± 0.20)					0.0295 ± 0.0138 (0.75 ± 0.35)					
VDCW (MAX)		200V / 250V	200V / 250V	500V	600V / 630V	1KV	200V / 250V	500V	600V / 630V	1KV	2KV	200V / 250V	500V	600V / 630V	1KV	2KV
CAPACITANCE CODE	101	100pF														
	121	120pF														
	151	150pF														
	181	180pF														
	221	220pF														
	271	270pF														
	331	330pF														
	391	390pF														
	471	470pF														
	561	560pF														
	681	680pF														
	821	820pF														
	102	1000pF														
	122	1200pF														
	152	1500pF														

**Note:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

### VOLTAGE AND CAPACITANCE RANGE

#### X7R DIELECTRIC



Values that are typically available.

All measurements in inches (mm)


SIZE		0603	0805			1206				1210							
L		0.063 ± 0.0078 (1.60 ± 0.20)	0.079 ± 0.0078 (2.00 ± 0.20)			0.130 ± 0.012 (3.30 ± 0.30)				0.130 ± 0.0158 (3.30 ± 0.40)							
W		0.0315 ± 0.0078 (0.80 ± 0.20)	0.05 ± 0.0078 (1.27 ± 0.20)			0.063 ± 0.0078 (1.60 ± 0.20)				0.0985 ± 0.012 (2.50 ± 0.30)							
T (max)		0.0394 (1.0)	0.057 (1.45)			0.071 (1.80)				0.110 (2.80)							
E/B		0.0158 ± 0.006 (0.40 ± 0.15)	0.020 ± 0.0078 (0.50 ± 0.20)			0.0236 ± 0.0078 (0.60 ± 0.20)				0.0295 ± 0.0138 (0.75 ± 0.35)							
VDCW (MAX)			200V / 250V	200V / 250V	500V	600V / 630V	1KV	200V / 250V	500V	600V / 630V	1KV	2KV	200V / 250V	500V	600V / 630V	1KV	2KV
182	1800pF																
222	2200pF																
272	2700pF																
332	3300pF																
392	3900pF																
472	4700pF																
562	5600pF																
682	6800pF																
822	8200pF																
103	0.01uF																
123	0.012uF																
153	0.015uF																
183	0.018uF																
223	0.022uF																
273	0.027uF																
333	0.033uF																
393	0.039uF																
473	0.047uF																
563	0.056uF																
683	0.068uF																
104	0.10uF																
124	0.12uF																
154	0.15uF																
184	0.18uF																
224	0.22uF																
274	0.27uF																
334	0.33uF																
394	0.39uF																
474	0.47uF																
564	0.56uF																
684	0.68uF																
824	0.82uF																
105	1.0uF																
155	1.5uF																
225	2.2uF																

CAPACITANCE CODE

Note: Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

### VOLTAGE AND CAPACITANCE RANGE

#### X7R DIELECTRIC



 Values that are typically available.


All measurements in inches (mm)

SIZE	1808						1812						1825					
L	0.177 ± 0.0158 (4.50 ± 0.40)						0.177 ± 0.0158 (4.50 ± 0.40)						0.177 ± 0.0158 (4.50 ± 0.40)					
W	0.080 ± 0.0098 (2.03 ± 0.25)						0.080 ± 0.0098 (2.03 ± 0.25)						0.252 ± 0.0158 (5.00 ± 0.40)					
T (max)	0.090 (2.28)						0.118 (3.0)						0.128 (3.25)					
E/B	0.0295 ± 0.0138 (0.75 ± 0.35)						0.0295 ± 0.0138 (0.75 ± 0.35)						0.0295 ± 0.0138 (0.75 ± 0.35)					
VDCW (MAX)	500V	600V / 630V	1KV	2KV	3KV	4KV	200V / 250V	500V	600V / 630V	1KV	2KV	3KV	200V / 250V	500V	1KV	2KV		
101	100pF																	
121	120pF																	
151	150pF																	
181	180pF																	
221	220pF																	
271	270pF																	
331	330pF																	
391	390pF																	
471	470pF																	
561	560pF																	
681	680pF																	
821	820pF																	
102	1000pF																	
122	1200pF																	
152	1500pF																	
182	1800pF																	
222	2200pF																	
272	2700pF																	
332	3300pF																	
392	3900pF																	
472	4700pF																	
562	5600pF																	
682	6800pF																	
822	8200pF																	
103	0.01uF																	
123	0.012uF																	
153	0.015uF																	
183	0.018uF																	
223	0.022uF																	
273	0.027uF																	
333	0.033uF																	
393	0.039uF																	
473	0.047uF																	
563	0.056uF																	
683	0.068uF																	
104	0.10uF																	
124	0.12uF																	
154	0.15uF																	
184	0.18uF																	
224	0.22uF																	
274	0.27uF																	
334	0.33uF																	
394	0.39uF																	
474	0.47uF																	
564	0.56uF																	
684	0.68uF																	
824	0.82uF																	
105	1.0uF																	
155	1.5uF																	
225	2.2uF																	

**Note:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.

### VOLTAGE AND CAPACITANCE RANGE

#### X7R DIELECTRIC




 Values that are typically available.

All measurements in inches (mm)

SIZE	2220				2225			
L	$0.225 \pm 0.0158$ (5.70 ± 0.40)				$0.225 \pm 0.0158$ (5.70 ± 0.40)			
W	$0.197 \pm 0.0158$ (5.00 ± 0.40)				$0.248 \pm 0.0158$ (6.30 ± 0.40)			
T (max)	$0.122$ (3.10)				$0.145$ (3.68)			
E/B	$0.0335 \pm 0.0138$ (0.85 ± 0.35)				$0.0335 \pm 0.0138$ (0.85 ± 0.35)			
VDCW (MAX)	200V / 250V	500V	1KV	2KV	200V / 250V	500V	1KV	2KV
151	150pF							
181	180pF							
221	220pF							
271	270pF							
331	330pF							
391	390pF							
471	470pF							
561	560pF							
681	680pF							
821	820pF							
102	1000pF							
122	1200pF							
152	1500pF							
182	1800pF							
222	2200pF							
272	2700pF							
332	3300pF							
392	3900pF							
472	4700pF							
562	5600pF							
682	6800pF							
822	8200pF							
103	0.01uF							
123	0.012uF							
153	0.015uF							
183	0.018uF							
223	0.022uF							
273	0.027uF							
333	0.033uF							
393	0.039uF							
473	0.047uF							
563	0.056uF							
683	0.068uF							
104	0.10uF							
124	0.12uF							
154	0.15uF							
184	0.18uF							
224	0.22uF							
274	0.27uF							
334	0.33uF							
394	0.39uF							
474	0.47uF							
564	0.56uF							
684	0.68uF							
824	0.82uF							
105	1.0uF							
155	1.5uF							
225	2.2uF							

**Note:** Additional values may be available. Please contact us for more information. Due to demand and raw material fluctuations, specific values may not be available.


### TAPE & REEL SPECIFICATIONS

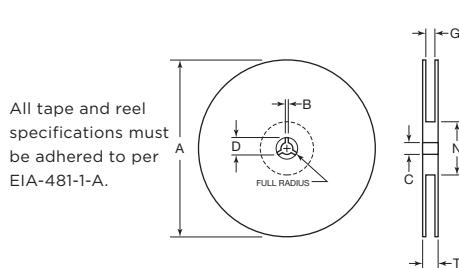

### REEL DIMENSIONS

TAPE	B min	C	A (7")	A (13")	D min	N min	Unit: mm (inch)	
							G	T max
8mm	.03 (.012)	$13 \pm .05$ (.512 ± .02)	$178 \pm 2.0$ (7±.079)	$330 \pm 2.0$ (13 ± .08)	.20.2 (.795)	.50 (1.97)	$10 \pm 1.5$ (.394 ± 1.059)	.14.9 (.587)
12mm	.03 (.012)	$13 \pm .05$ (.512 ± .02)	$178 \pm 2.0$ (7±.079)	$330 \pm 2.0$ (13 ± .08)	.20.2 (.795)	.50 (1.97)	$10 \pm 1.5$ (.394 ± 1.059)	.14.9 (.587)

### TAPING SPECIFICATIONS

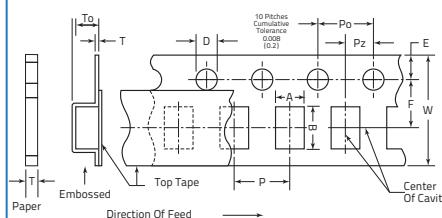

### 7 IN. REEL QUANTITIES\*

SIZE	0603	0805	1205	1210	1812	2221
Tape Size	8mm	8mm	8mm	8mm	12mm	12mm
Min Qty per Reel	3000	2000	2000	1000	1000	1000
Max Qty per reel	4000	5000	5000	5000	3000	1000

\* Quantity dependent on thickness

### PAPER TAPE CARRIER DIMENSIONS (8mm)

SIZE (inches)	A	B	W	F	E	Po	Pz	D	t	P
0603	$1.10 \pm 0.2$ (.043 ± .008)	$1.90 \pm 0.2$ (.075 ± .008)	$8.0 \pm 0.2$ (.315 ± .008)	$3.5 \pm 0.1$ (.138 ± .004)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ -.0.0 (.079 ± .002) -.000	$1.5 \pm 0.1$ (.064 ± .004)	$1.15 \text{ MAX}$ (.045 MAX)	$4.0 \pm 0.1$ (.157 ± .004)
0805	$1.16 \pm 0.2$ (.046 ± .008)	$2.4 \pm 0.2$ (.095 ± .008)	$8.0 \pm 0.2$ (.315 ± .008)	$3.5 \pm 0.1$ (.138 ± .004)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ -.0.0 (.079 ± .002) -.000	$1.5 \pm 0.1$ (.064 ± .004)	$1.15 \text{ MAX}$ (.045 MAX)	$4.0 \pm 0.1$ (.157 ± .004)
1206	$2.0 \pm 0.2$ (.079 ± .008)	$3.6 \pm 0.2$ (.142 ± .008)	$8.0 \pm 0.2$ (.315 ± .008)	$3.5 \pm 0.1$ (.138 ± .004)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ -.0.0 (.079 ± .002) -.000	$1.5 \pm 0.1$ (.064 ± .004)	$1.15 \text{ MAX}$ (.045 MAX)	$4.0 \pm 0.1$ (.157 ± .004)

### EMBOSSSED CARRIER DIMENSIONS (8mm & 12mm)

SIZE (inches)	A	B	W	F	E	Po	Pz	D	To	T	P
0805	$1.48 \pm 0.2$ (.058 ± .008)	$2.3 \pm 0.2$ (.091 ± .008)	$8.0 \pm 0.2$ (.315 ± .008)	$3.5 \pm 0.1$ (.138 ± .004)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ (.079 ± .002)	$1.5 \pm 0.1$ -.0.0 (.064 ± .004) -.000	$2.5 \text{ MAX}$ (.098 MAX)	$0.6 \text{ MAX}$ (.024 MAX)	$4.0 \pm 0.1$ (.157 ± .004)
1206	$2.0 \pm 0.2$ (.079 ± .008)	$3.6 \pm 0.2$ (.142 ± .008)	$8.0 \pm 0.2$ (.315 ± .008)	$3.5 \pm 0.1$ (.138 ± .004)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ (.079 ± .002)	$1.5 \pm 0.1$ -.0.0 (.064 ± .004) -.000	$2.5 \text{ MAX}$ (.098 MAX)	$0.6 \text{ MAX}$ (.024 MAX)	$4.0 \pm 0.1$ (.157 ± .004)
1210	$2.9 \pm 0.2$ (.114 ± .008)	$3.6 \pm 0.2$ (.142 ± .008)	$8.0 \pm 0.2$ (.315 ± .008)	$3.5 \pm 0.1$ (.138 ± .004)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ (.079 ± .002)	$1.5 \pm 0.1$ -.0.0 (.064 ± .004) -.000	$2.5 \text{ MAX}$ (.098 MAX)	$0.6 \text{ MAX}$ (.024 MAX)	$4.0 \pm 0.1$ (.157 ± .004)
1808	$2.5 \pm 0.2$ (.098 ± .008)	$4.9 \pm 0.2$ (.193 ± .008)	$12.0 \pm 0.3$ (.472 ± .012)	$5.5 \pm 0.5$ (.22 ± .002)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ (.079 ± .002)	$1.5 \pm 0.1$ -.0.0 (.064 ± .004) -.000	$4.0 \text{ MAX}$ (.16 MAX)	$0.6 \text{ MAX}$ (.024 MAX)	$4.0 \pm 0.1$ (.157 ± .004)
1812	$3.6 \pm 0.2$ (.142 ± .008)	$4.9 \pm 0.2$ (.193 ± .008)	$12.0 \pm 0.3$ (.472 ± .012)	$5.6 \pm 0.1$ (.221 ± .004)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ (.079 ± .002)	$1.5 \pm 0.1$ -.0.0 (.064 ± .004) -.000	$4.0 \text{ MAX}$ (.16 MAX)	$0.6 \text{ MAX}$ (.024 MAX)	$8.0 \pm 0.1$ (.315 ± .004)
2220	$5.4 \pm 0.2$ (.21 ± .008)	$6.1 \pm 0.2$ (.24 ± .008)	$12.0 \pm 0.3$ (.472 ± .012)	$5.5 \pm 0.5$ (.22 ± .002)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ (.079 ± .002)	$1.5 \pm 0.1$ -.0.0 (.064 ± .004) -.000	$4.0 \text{ MAX}$ (.16 MAX)	$0.6 \text{ MAX}$ (.024 MAX)	$8.0 \pm 0.1$ (.315 ± .004)
2225	$6.9 \pm 0.2$ (.27 ± .008)	$6.1 \pm 0.2$ (.24 ± .008)	$12.0 \pm 0.3$ (.472 ± .012)	$5.5 \pm 0.5$ (.22 ± .002)	$1.75 \pm 0.1$ (.069 ± .004)	$4.0 \pm 0.1$ (.157 ± .004)	$2.0 \pm 0.05$ (.079 ± .002)	$1.5 \pm 0.1$ -.0.0 (.064 ± .004) -.000	$4.0 \text{ MAX}$ (.16 MAX)	$0.6 \text{ MAX}$ (.024 MAX)	$8.0 \pm 0.1$ (.315 ± .004)