


Straight Leads Diameter > 8  
Lead and packaging code EA and KA

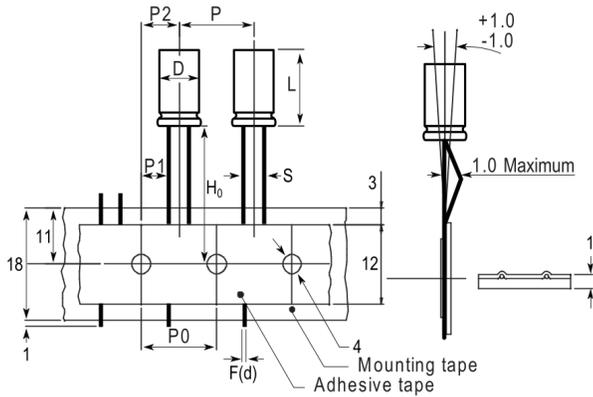

Note: '(j)' correspond to the letters used in the product bulletin

Click [here](#) for the 3D model.

Dimensions	
D	18mm +/-0.5mm
L	25mm +2.0/-0mm
S	7.5mm +/-0.5mm
LL Negative	15mm MIN
LL Positive	20mm MIN
F	0.8mm NOM

Packaging Specifications	
Packaging	Ammo
Packaging Quantity	300

General Information	
Series	ESH
Dielectric	Aluminum Electrolytic
Description	High CV Single Ended Aluminum Electrolytic
RoHS	Yes
Lead	Wire Leads
AEC-Q200	No

Specifications	
Capacitance	68 $\mu$ F
Capacitance Tolerance	20%
Voltage DC	400 VDC, 450 VDC (Surge)
Temperature Range	-25/+105°C
Rated Temperature	105°C
Life	2000 Hrs
Dissipation Factor	20% 120Hz 25C
Ripple Current	390 mAmps (120Hz 105C)
Leakage Current	826 $\mu$ A (2min 20°C)
Impedance Ratio at -25C	4